TRANSITION ALT
5000

LAPPEENRANTA, FINLAND

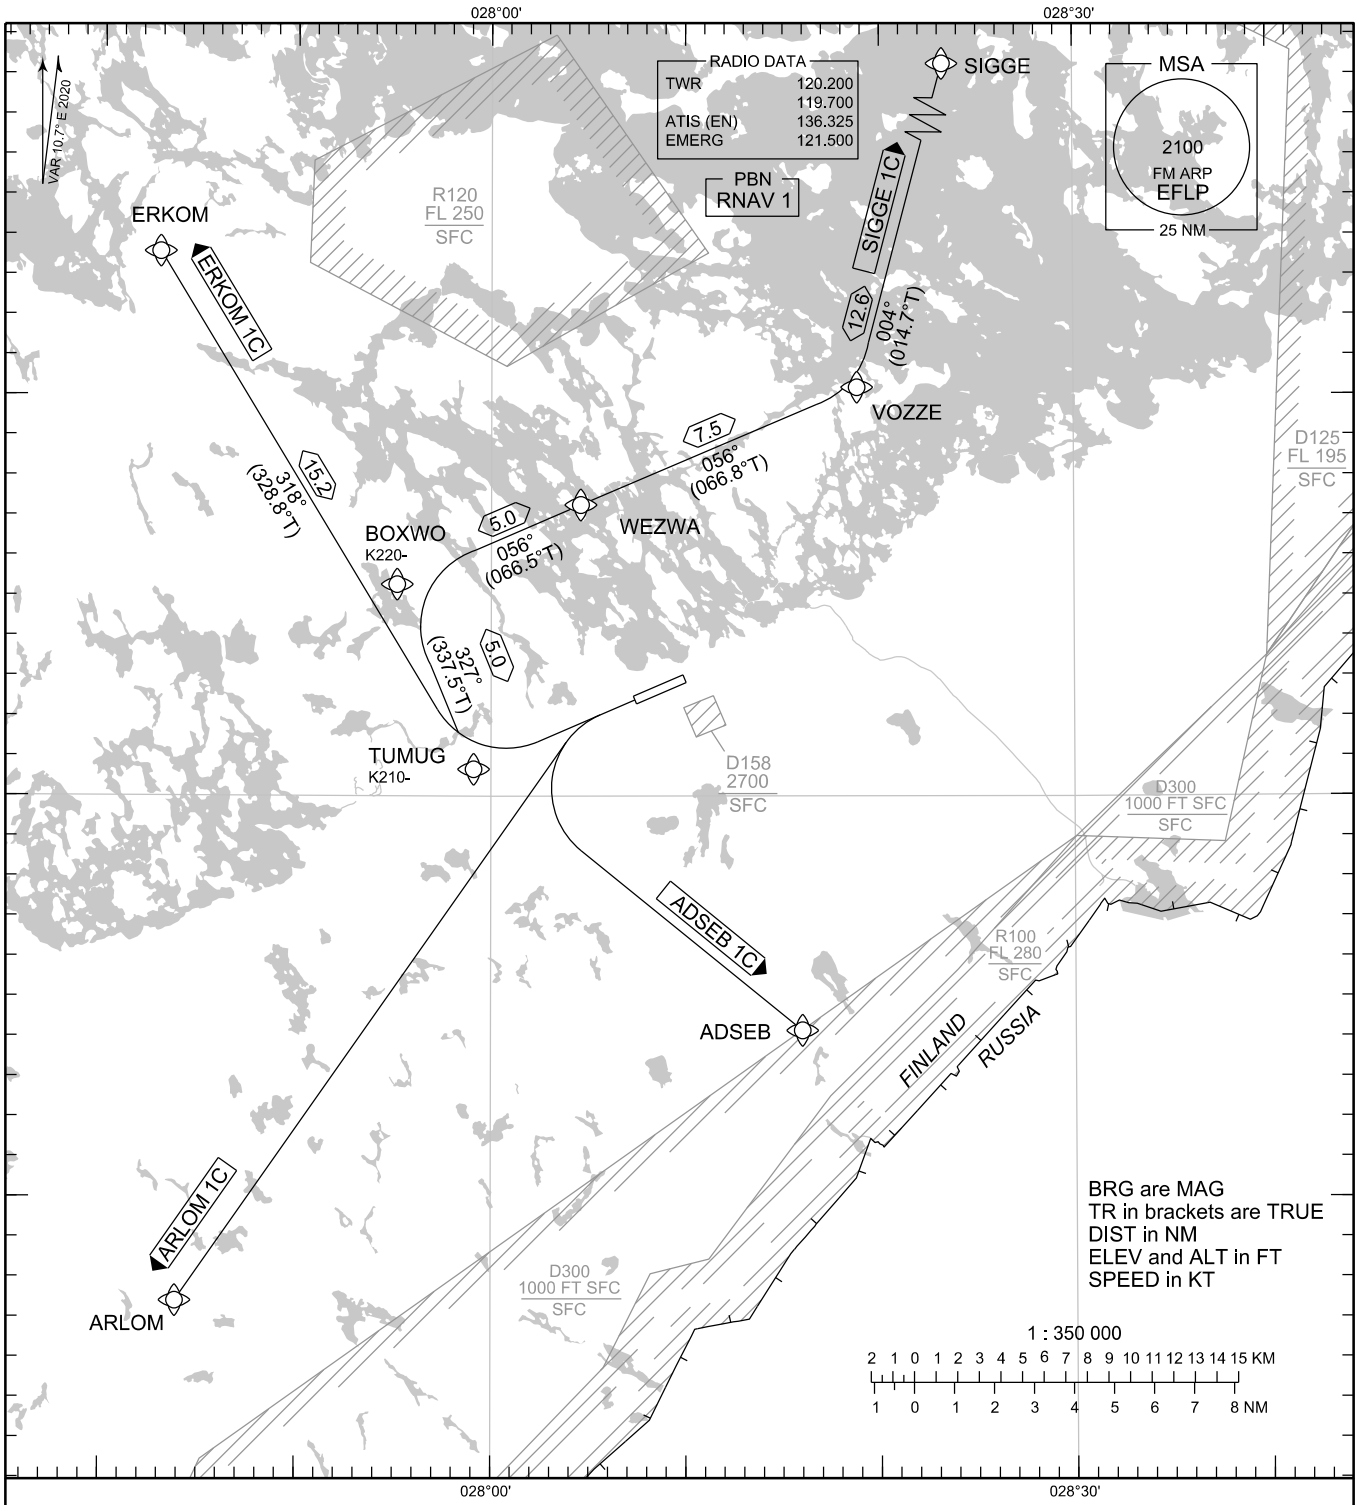

RNAV SID RWY 24

ADSEB 1C ARLOM 1C ERKOM 1C SIGGE 1C

DME/DME OPS:	NOT SUPPORTED
ROUTES:	RNAV PROC CODING ON THE VERSO OF THE CHART
SQUAWK:	WHEN LINING UP SQUAWK THE ASSIGNED CODE
INITIAL CLIMB:	MNM TURNING ALTITUDE ACCORDING TO RTE CODING.
NOISE ABATEMENT:	AFTER TAKE-OFF CLIMB AS RAPIDLY AS PRACTICABLE TO AT LEAST 2000 FT ABOVE AD ELEV PUBLISHED SID ROUTES ARE ALSO MINIMUM NOISE ROUTINGS
AREA MNM ALT:	SEE AMA INDEX, AIP ENR 6.1 - 3

CHG: editorial

© FINTRAFFIC ANS

EFLP RNAV SID RWY 24										
RTE NAV SPEC	SEQ NR	P/T	WPT		MAG	GEO TR	DIST NM	Turn Direction	Constraints	
			ID	Flyover					LVL	Speed
ADSEB 1C RNAV 1	010	CA	-	-	236°	246.7°T	-		A750+	
	020	DF	ADSEB	-	-	-	-			
ARLOM 1C RNAV 1	010	CA	-	-	236°	246.7°T	-		A750+	
	020	DF	ARLOM	-	-	-	-			
ERKOM 1C RNAV 1	010	CA	-	-	236°	246.7°T	-		A750+	
	020	DF	TUMUG	-	-	-	-			K210-
	030	TF	ERKOM	-	318°	328.8°T	15.2			
SIGGE 1C RNAV 1	010	CA	-	-	236°	246.7°T	-		A750+	
	020	DF	TUMUG	-	-	-	-			K210-
	030	TF	BOXWO	-	327°	337.5°T	5.0	R		K220-
	040	TF	WEZWA	-	056°	066.5°T	5.0			
	050	TF	VOZZE	-	056°	066.8°T	7.5	L		
	060	TF	SIGGE	-	004°	014.7°T	12.6			

WPT COORD
SEE PAGE EFLP AD 2.15 - 1

 © FINTRAFFIC ANS