

STANDARD ARRIVAL
CHART INSTRUMENT - ICAO
(STAR)

TRANSITION ALT 5000
AD ELEV 412ft


APP 119.950
TWR 121.050
ATIS 126.955

KOS / IPPOKRATIS

RNP1 ARRIVAL RWY 14

ICAO DOC 8168, VOL. II, 6h ed. Amend 8

Change: ATIS frequency

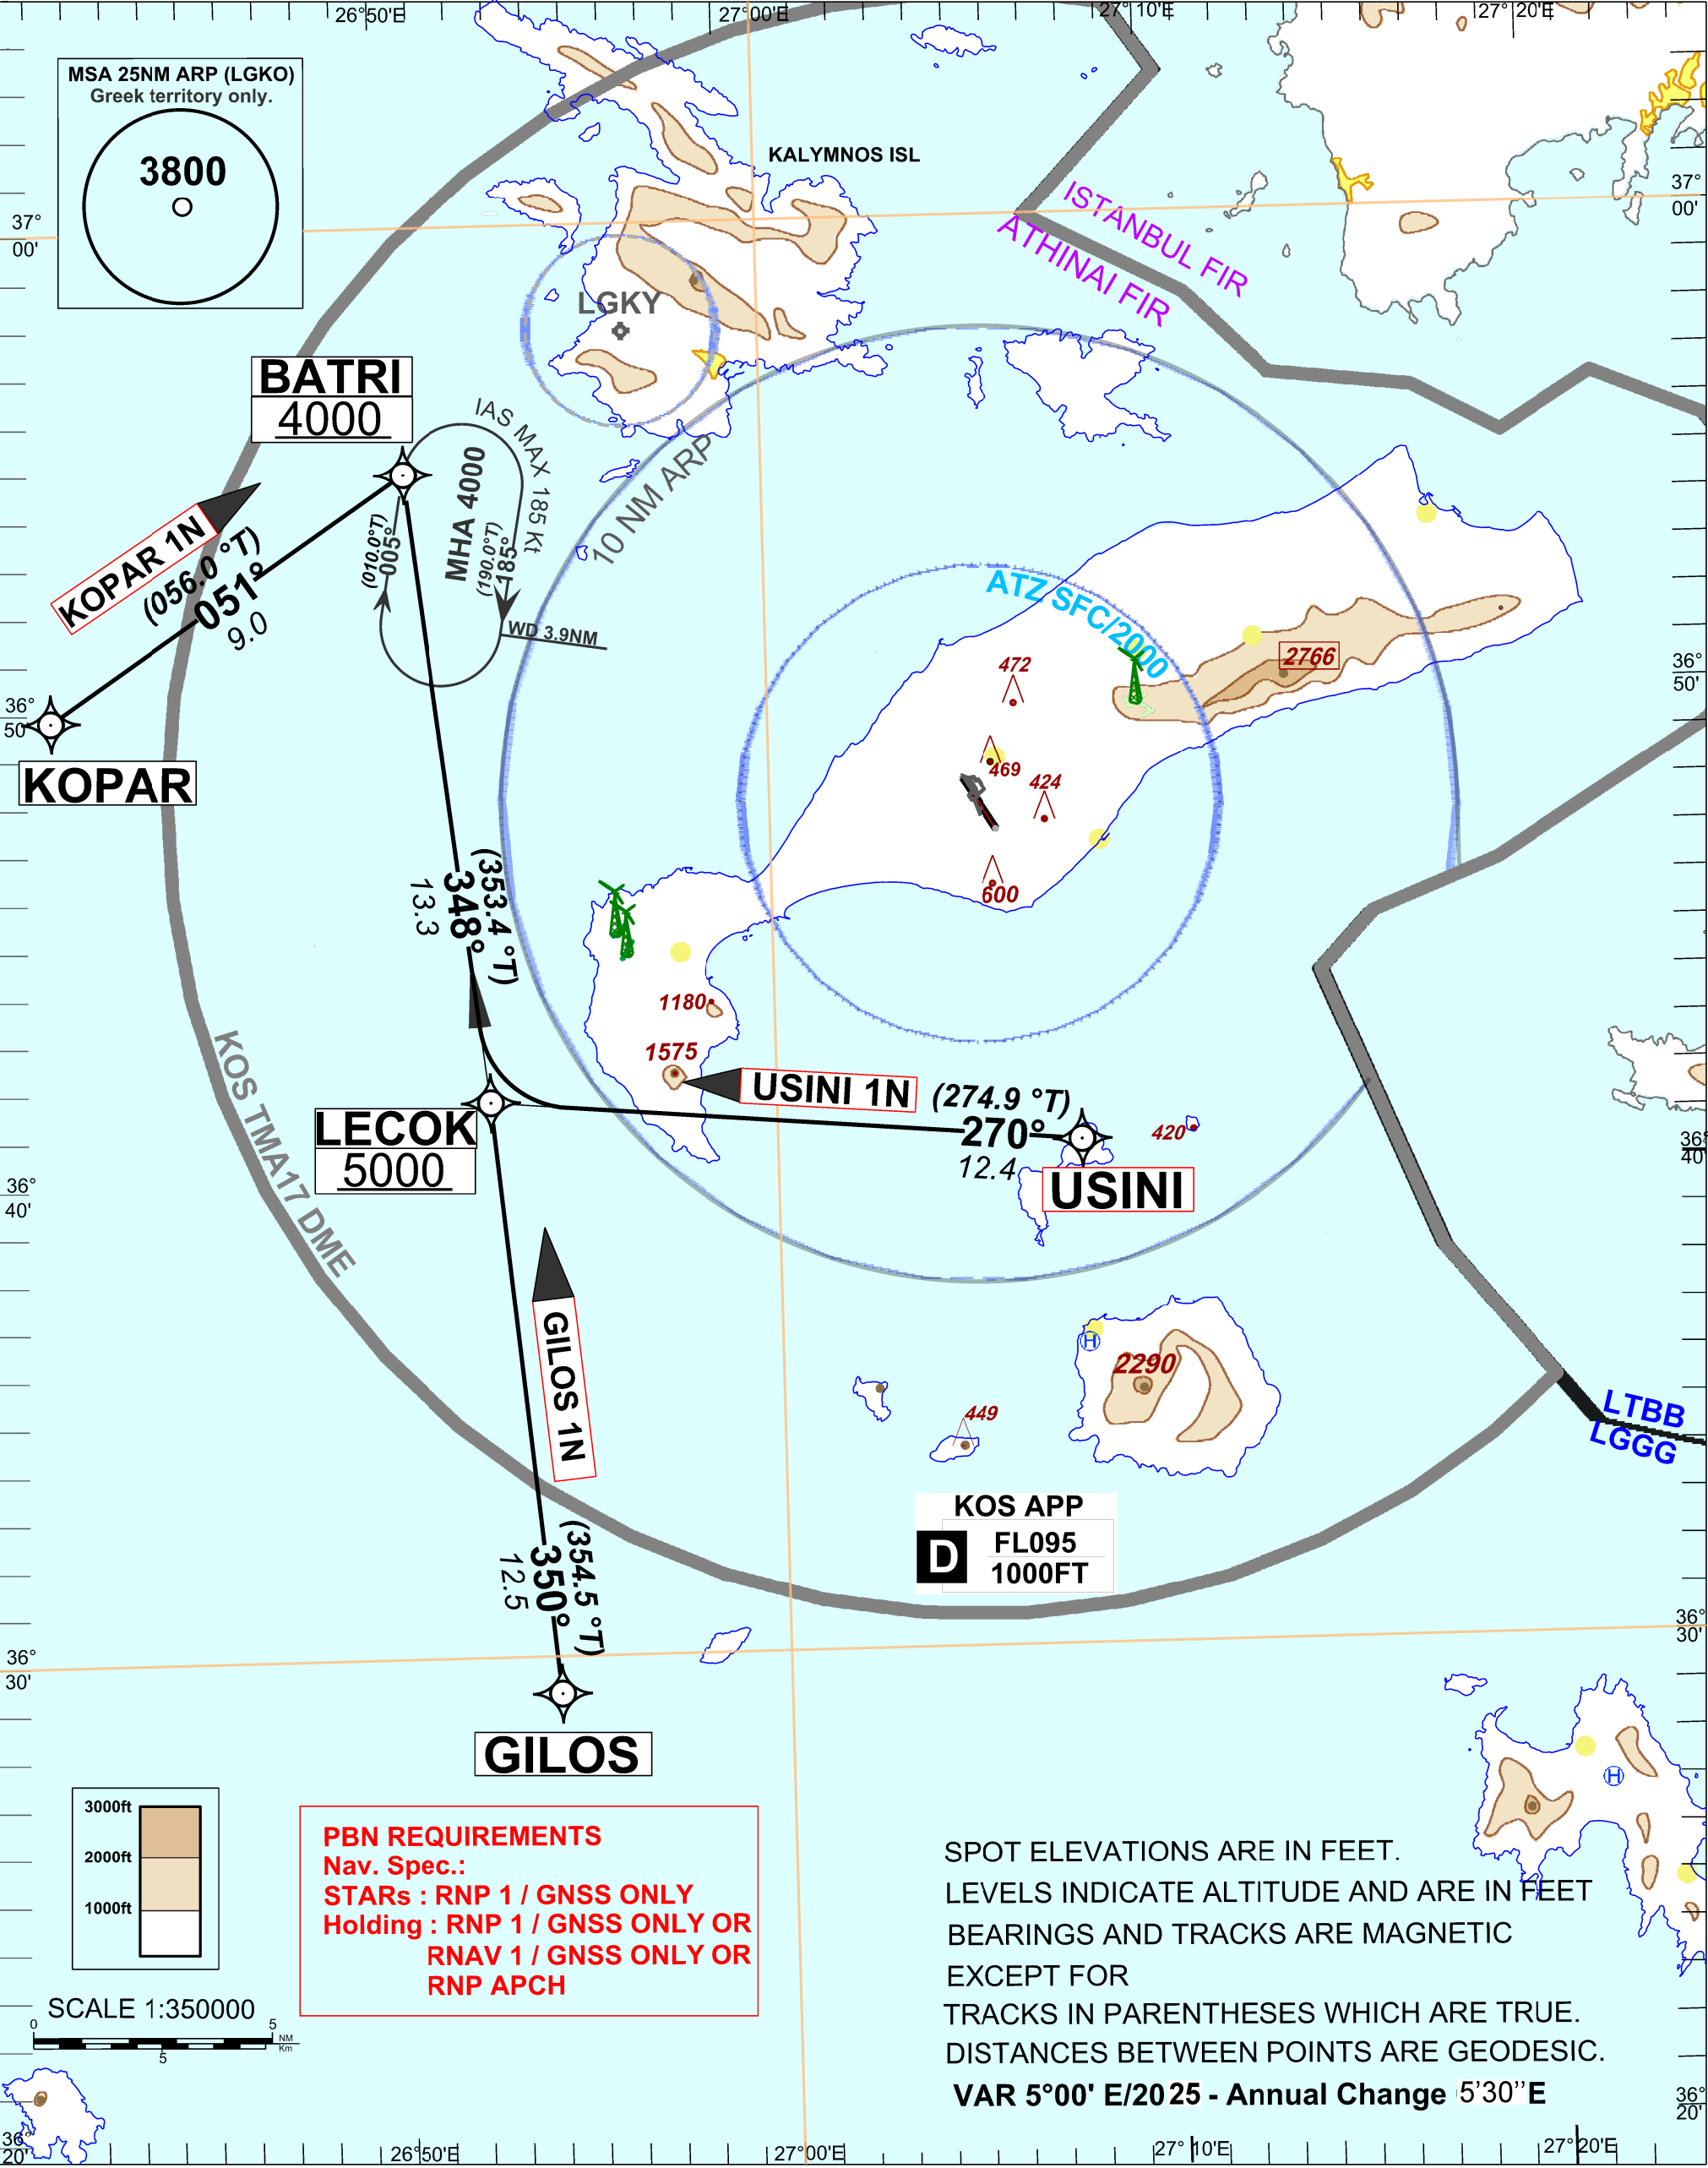

USINI 1N									
Seq N°	Path Terminator	Waypoint	F/O	Bearing °M (°T)	Distance (NM)	Turn Direction	Altitude (ft)	IAS (kt)	Navigation Specification
10	IF	USINI							RNP1/GNSS only
20	TF	LECOK		270 (274.9)	12.4		+5000		RNP1/GNSS only
30	TF	BATRI		348 (353.4)	13.3		+4000	-185	RNP1/GNSS only
40	HM	BATRI		005 (010.0)	3.0 (*3.9)	R	+4000	-185	RNP1/GNSS only RNAV1/GNSS only or RNP APCH

* Holding waypoint distance (only for RNAV systems without RNAV functionality)

GILOS 1N									
Seq N°	Path Terminator	Waypoint	F/O	Bearing °M (°T)	Distance (NM)	Turn Direction	Altitude (ft)	IAS (kt)	Navigation Specification
10	IF	GILOS							RNP1/GNSS only
20	TF	LECOK		350 (354.5)	12.5		+5000		RNP1/GNSS only
30	TF	BATRI		348 (353.4)	13.3		+4000	-185	RNP1/GNSS only
40	HM	BATRI		005 (010.0)	3.0 (*3.9)	R	+4000	-185	RNP1/GNSS only RNAV1/GNSS only or RNP APCH

* Holding waypoint distance (only for RNAV systems without RNAV functionality)

KOPAR 1N									
Seq N°	Path Terminator	Waypoint	F/O	Bearing °M (°T)	Distance (NM)	Turn Direction	Altitude (ft)	IAS (kt)	Navigation Specification
10	IF	KOPAR							RNP1/GNSS only
20	TF	BATRI		051 (056.0)	9.0		+4000	-185	RNP1/GNSS only
30	HM	BATRI		005 (010.0)	3.0 (*3.9)	R	+4000	-185	RNP1/GNSS only RNAV1/GNSS only or RNP APCH

* Holding waypoint distance (only for RNAV systems without RNAV functionality)

WAYPOINT LIST		
WAYPOINT IDENTIFICATION		LONGITUDE
BATRI		026° 50' 39.0000" E
GILOS		026° 54' 01.2000" E
LECOK		026° 52' 32.6816" E
USINI		027° 07' 54.0000" E
KOPAR		026° 41' 19.0000" E