

ATLANTA, GEORGIA

AL-26 (FAA)

25051

WAAS CH 56300 W26A	APP CRS 275°	Rwy Idg 9999 TDZE 996 Apt Elev 1026
--	------------------------	--


RNAV (GPS) RWY 26L
HARTSFIELD/JACKSON ATLANTA INTL (ATL)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For rnp MALSR, increase LPV all Cts visibility to Rwy 4500, LNAV/VNAV all Cts visibility to Rwy 6000. Simultaneous approach authorized with Rwy 27L or 27R or 28. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.


MALSR

MISSED APPROACH:
Climb to 1500 then
climbing right turn to
3500 direct TROYS
and hold.

D-ATIS	ATLANTA	ATLANTA TOWER						ALL	GND CON			ALL
ARR	APP CON	8L-26R	8R-26L	9L-27R	9R-27L	10-28	RWYS	(8L-26R,8R-26L)	(9L-27R,9R-27L)	10-28	RWYS	
ARR 119.65												
DEP 125.55	127.9	379.9	119.1	125.325	123.85	119.3	119.5	254.4	121.9	121.75	121.65	254.4




CLNC DEL 118-1	CPDLC
-----------------------------	-------

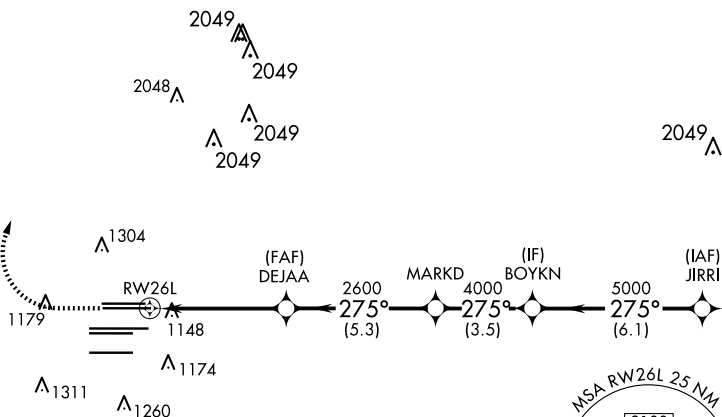


ELEV 1026		TDZE 996
-----------	---	----------

RADAR REQUIRED



HIRL all Rwy's
TDZ/CL Rwy's 8L, 9R, 10, 26R,
27L and 28

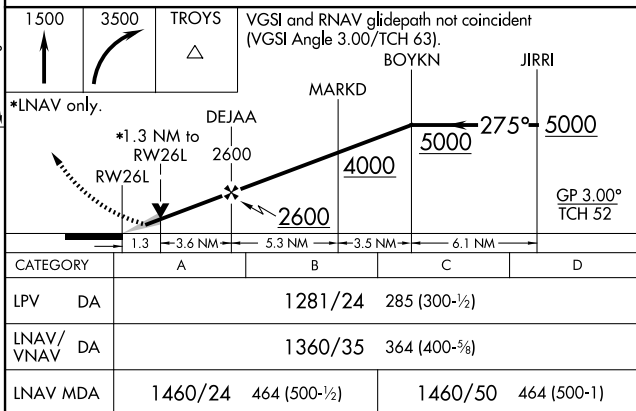

ATLANTA, GEORGIA

Amdt 4 18SEP14

HARTSFIELD/JACKSON ATLANTA INTL (ATL)

33°38'N-84°26'W

RNAV (GPS) RWY 26L

SE-4, 20 MAR 2025 to 17 APR 2025

SE-4, 20 MAR 2025 to 17 APR 2025