

STANDARD ARRIVAL CHART -INSTRUMENT

RJOM / MATSUYAMA

RNAV STAR RWY14/32


ROBIN EAST ARRIVAL
MADON ARRIVAL
KIKMA ARRIVAL

RNP1

Note GNSS required.

VAR 7°W (2016)

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

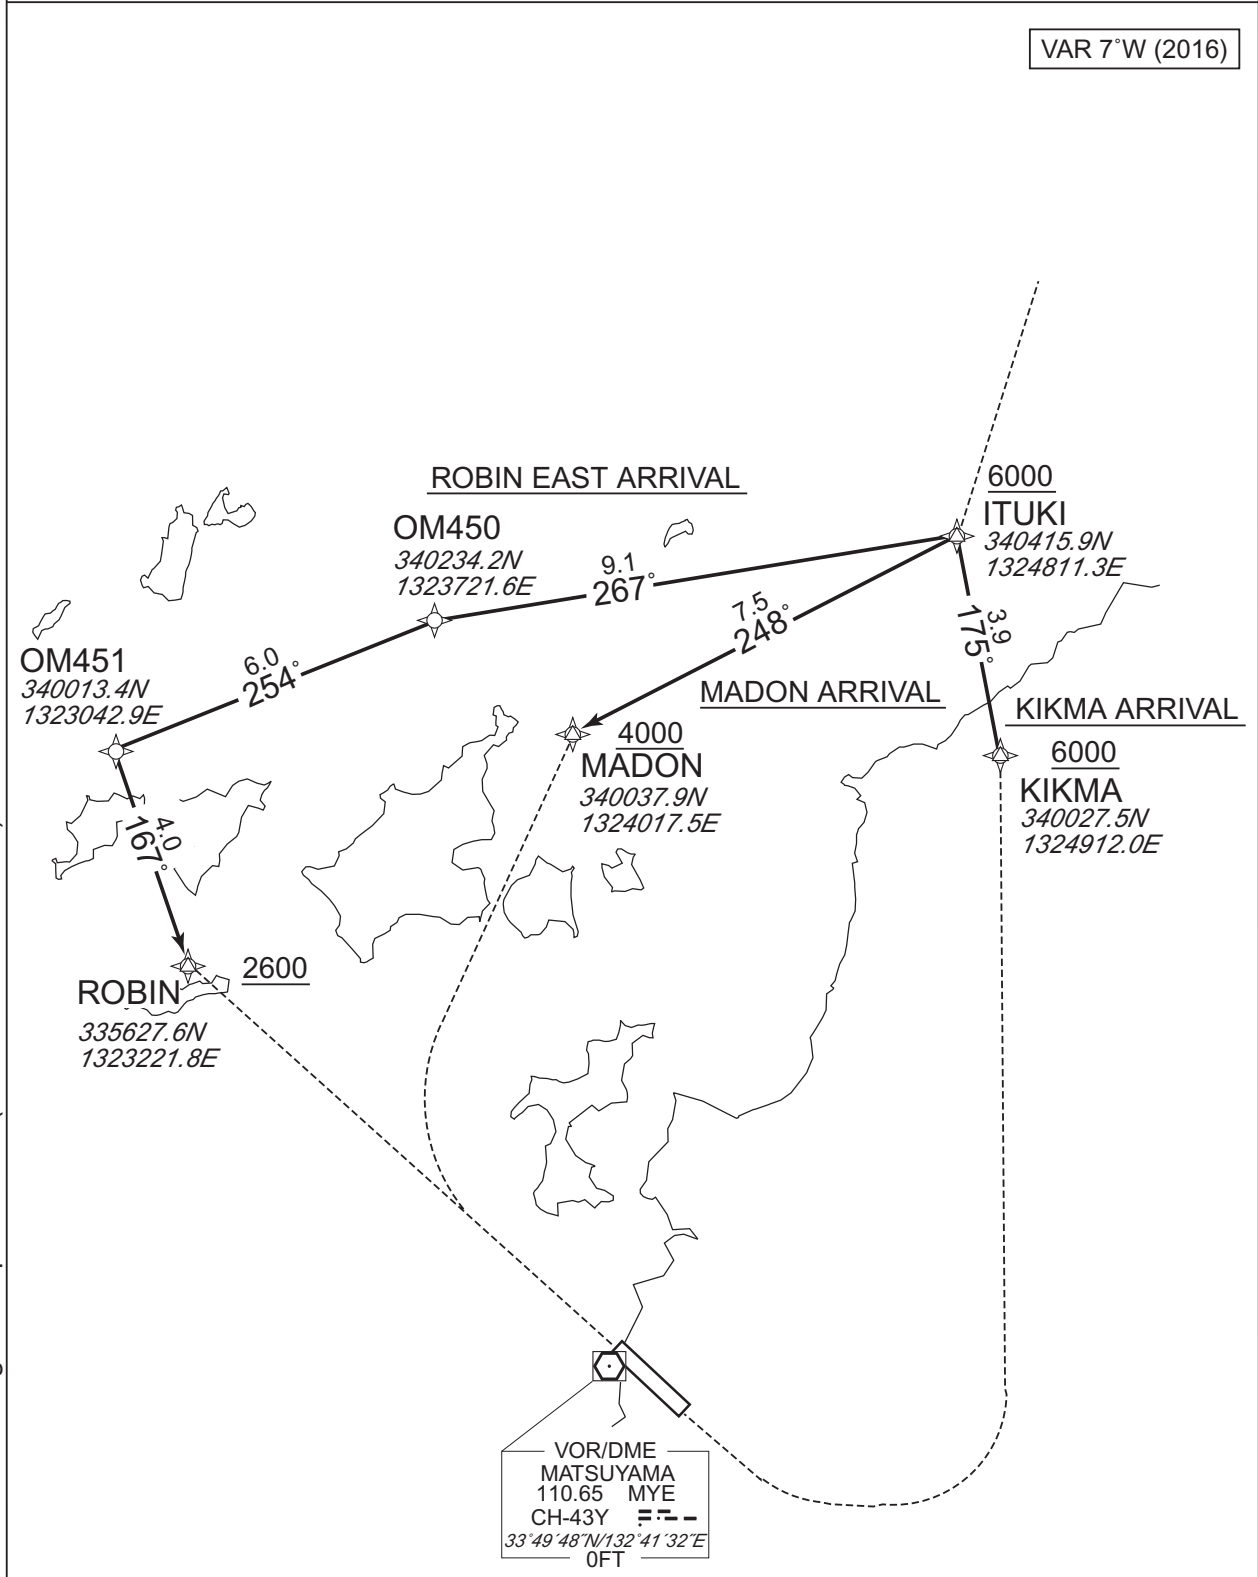

STANDARD ARRIVAL CHART -INSTRUMENT

RJOM / MATSUYAMA

RNAV STAR RWY14/32

ROBIN EAST ARRIVAL

From ITUKI at or above 6000FT, to OM450, to OM451, to ROBIN at or above 2600FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ITUKI	-	-	-7.4	-	-	+6000	-	-	RNP1
002	TF	OM450	-	267 (259.4)	-7.4	9.1	-	-	-	-	RNP1
003	TF	OM451	-	254 (247.0)	-7.4	6.0	-	-	-	-	RNP1
004	TF	ROBIN	-	167 (160.0)	-7.4	4.0	-	+2600	-	-	RNP1

MADON ARRIVAL

From ITUKI at or above 6000FT, to MADON at or above 4000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ITUKI	-	-	-7.4	-	-	+6000	-	-	RNP1
002	TF	MADON	-	248 (241.0)	-7.4	7.5	-	+4000	-	-	RNP1

KIKMA ARRIVAL

From ITUKI at or above 6000FT, to KIKMA at or above 6000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ITUKI	-	-	-7.4	-	-	+6000	-	-	RNP1
002	TF	KIKMA	-	175 (167.6)	-7.4	3.9	-	+6000	-	-	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).