

STANDARD ARRIVAL CHART - INSTRUMENT

VAR9° W

D-ATIS 126.25
TWR 118.85(124.35)

ZYCC CHANGCHUN/Longjiao
RNAV RWY06(DUKIR/BUTET)

BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS.
DME DISTANCES IN
NAUTICAL MILES.
DISTANCES IN KM.

APP01 119.45(127.9)
APP02 125.25(127.9)
APP03 120.2(127.9)


TL 3600
TA 3000
3300(QNH ≥ 1031hPa)
2700(QNH ≤ 979hPa)




RNAV1
GNSS, RADAR REQUIRED

Note:

1. When aircraft ALT is 3000m(QNH) or below, MAX IAS is 250kt.
2. BUTET-71A shall be used for CDO procedure with ATC approval, and the CDO operation time 1400-2200; CDO terminated once ATC give heading instructions.
3. Holding at CC513 shall be used by ATC.

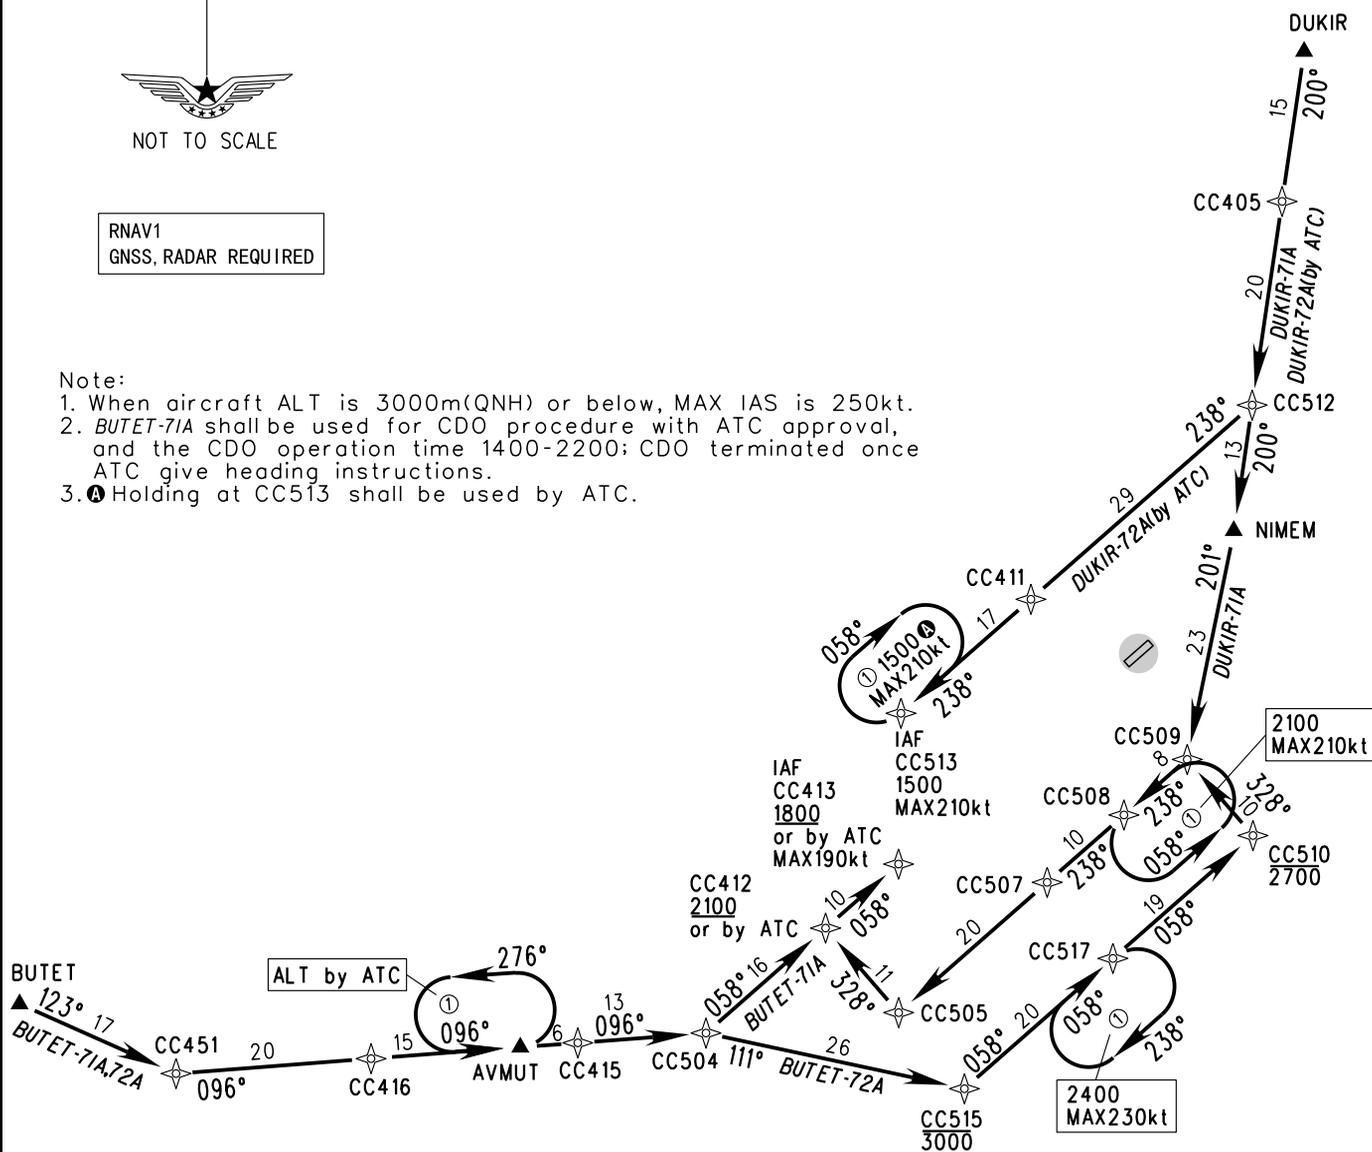

STAR	ROUTING
DUKIR-71A	DUKIR-CC405-CC512-NIMEM-CC509-CC508-CC507-CC505-CC412-CC413
DUKIR-72A (by ATC)	DUKIR-CC405-CC512-CC411-CC513
BUTET-71A	BUTET-CC451-CC416-AVMUT-CC415-CC504-CC412-CC413
BUTET-72A	BUTET-CC451-CC416-AVMUT-CC415-CC504-CC515-CC517-CC510-CC509-CC508-CC507-CC505-CC412-CC413



Changes: APP03.