


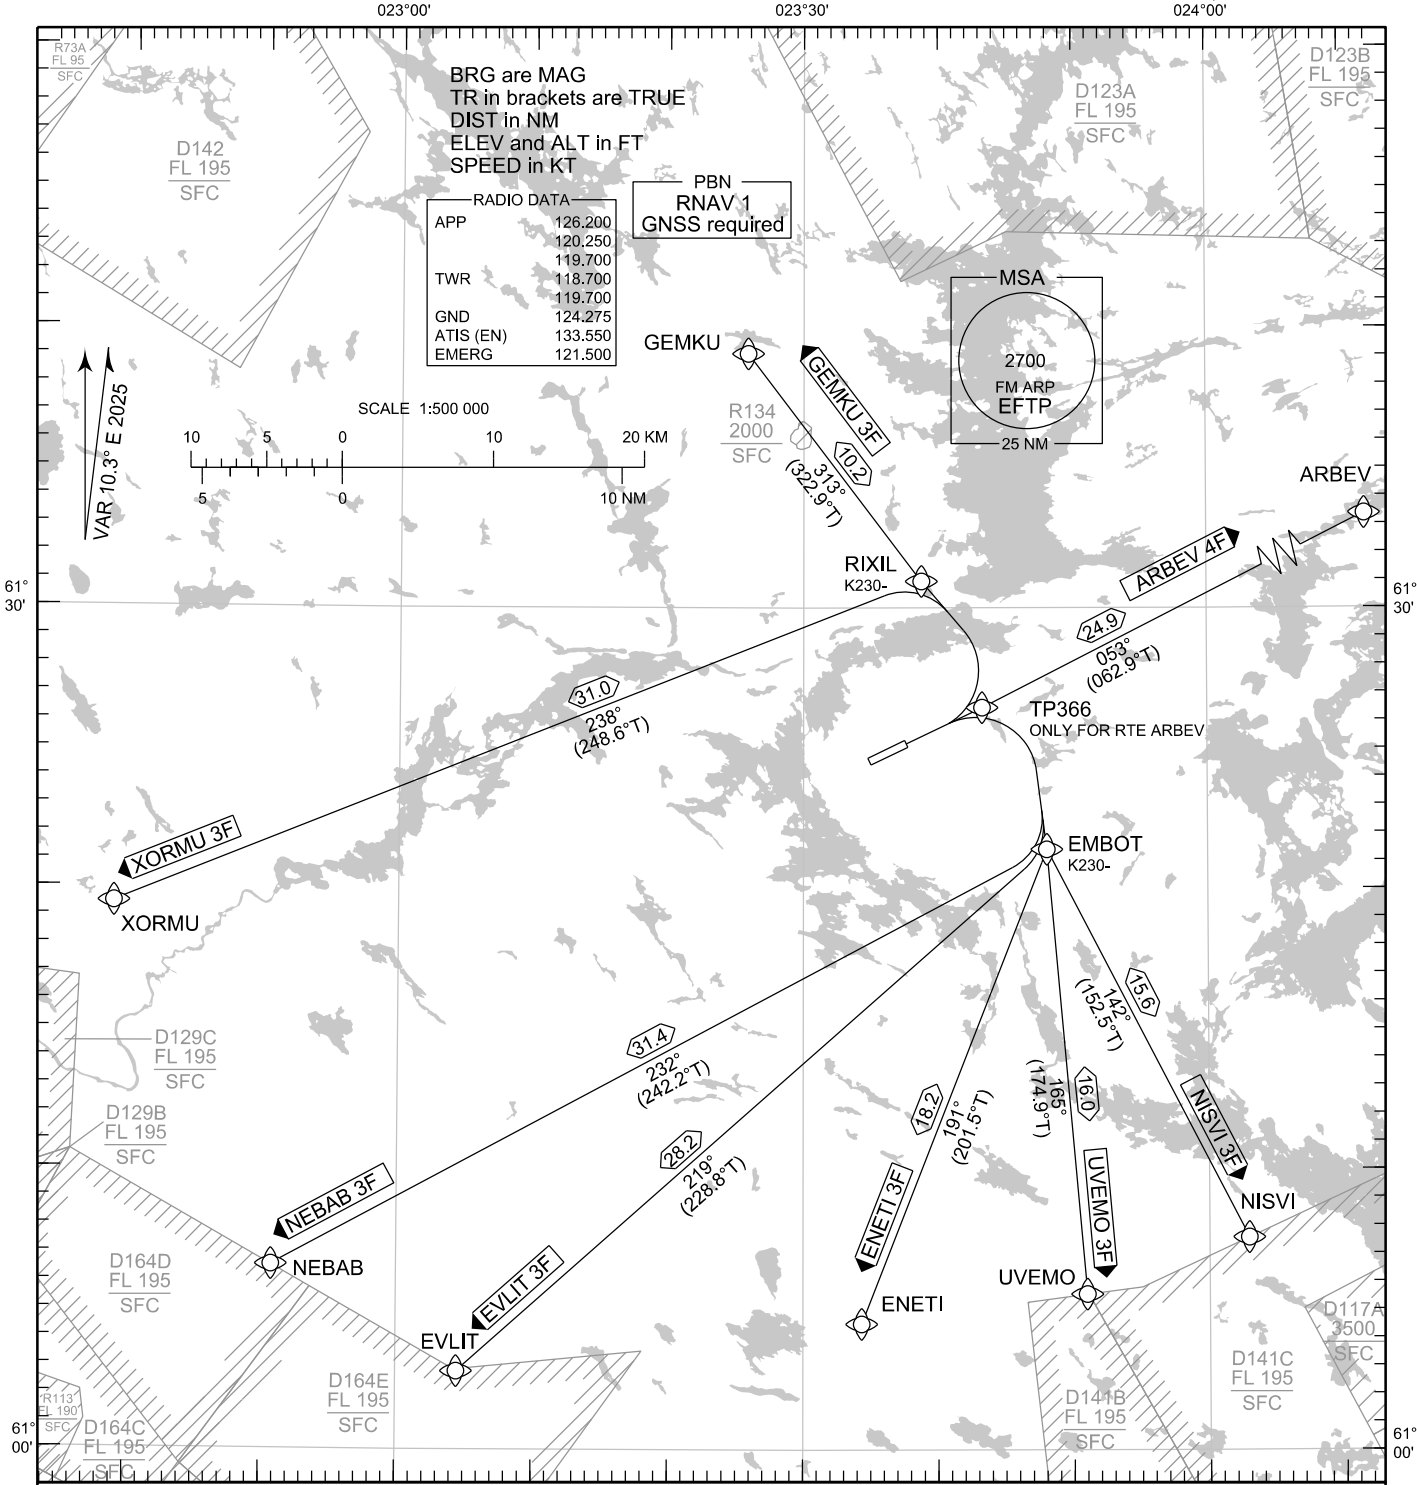

CHG: MAG VAR

RNAV SID RWY 06

ARBEV 4F ENETI 3F EVLIT 3F GEMKU 3F NEBAB 3F NISVI 3F UVEMO 3F XORMU 3F

DME/DME OPS: NOT SUPPORTED

ROUTES: RNAV PROC CODING ON THE VERSO OF THE CHART

SQUAWK: WHEN LINING UP SQUAWK THE ASSIGNED CODE

INITIAL CLIMB: MNM TURNING ALTITUDE ACCORDING TO RTE CODING

RADIO CONTACT: MAINTAIN TWR FREQ UNTIL 1500 FT, THEN CONTACT PIRKKALA RADAR FREQ 126.200

NOISE ABATEMENT: AFTER TAKE-OFF CLIMB AS RAPIDLY AS PRACTICABLE TO AT LEAST 2000 FT ABOVE AD ELEV
PUBLISHED SID ROUTES ARE ALSO MINIMUM NOISE ROUTINGS

AREA MNM ALT: SEE AMA INDEX, AIP ENR 6.1 - 3

EFTP RNAV SID RWY 06										
RTE NAV SPEC	SEQ NR	P/T	WPT		MAG	GEO TR	DIST NM	Turn Direction	Constraints	
			ID	Flyover					LVL	Speed
ARBEV 4F RNAV 1	010	CA	-	-	054°	064.3°T	-		A890+	
	020	DF	TP366	-	-	-	-			
	030	TF	ARBEV	-	053°	062.9°T	24.9			
ENETI 3F RNAV 1	010	CA	-	-	054°	064.3°T	-	R	A1100+	
	020	DF	EMBOT	-	-	-	-			K230-
	030	TF	ENETI	-	191°	201.5°T	18.2			
EVLIT 3F RNAV 1	010	CA	-	-	054°	064.3°T	-	R	A1100+	
	020	DF	EMBOT	-	-	-	-			K230-
	030	TF	EVLIT	-	219°	228.8°T	28.2			
GEMKU 3F RNAV 1	010	CA	-	-	054°	064.3°T	-	L	A1100+	
	020	DF	RIXIL	-	-	-	-			K230-
	030	TF	GEMKU	-	313°	322.9°T	10.2			
NEBAB 3F RNAV 1	010	CA	-	-	054°	064.3°T	-	R	A1100+	
	020	DF	EMBOT	-	-	-	-			K230-
	030	TF	NEBAB	-	232°	242.2°T	31.4			
NISVI 3F RNAV 1	010	CA	-	-	054°	064.3°T	-	R	A1100+	
	020	DF	EMBOT	-	-	-	-			K230-
	030	TF	NISVI	-	142°	152.5°T	15.6			
UVEMO 3F RNAV 1	010	CA	-	-	054°	064.3°T	-	R	A1100+	
	020	DF	EMBOT	-	-	-	-			K230-
	030	TF	UVEMO	-	165°	174.9°T	16.0			
XORMU 3F RNAV 1	010	CA	-	-	054°	064.3°T	-	L	A1100+	
	020	DF	RIXIL	-	-	-	-			K230-
	030	TF	XORMU	-	238°	248.6°T	31.0			
WPT COORD										
SEE PAGE EFTP AD 2.15 - 1										