

STANDARD DEPARTURE CHART -INSTRUMENT

RODN/KADENA



ATIS★ 124.2 280.5
 CLNC DEL
 123.3 235.0
 GND CON
 118.5 275.8
 TOWER
 134.1 315.8
 NAHA DEP CON
 119.1 335.8 (NW)
 126.5 258.3 (SW)

EKOLU THREE DEPARTURE

Rwy	Knots	60	120	180	240	300	360
23L (a)	V/V(fpm)	205	410	615	820	1025	1230
23L (b)	V/V(fpm)	455	910	1365	1820	2275	2730
23R (a)	V/V(fpm)	206	412	618	824	1030	1236
23R (b)	V/V(fpm)	460	920	1380	1840	2300	2760

ATC Climb Rate
 (a) to EKOLU to 2700
 (b) to EKAHI to 2200

1194

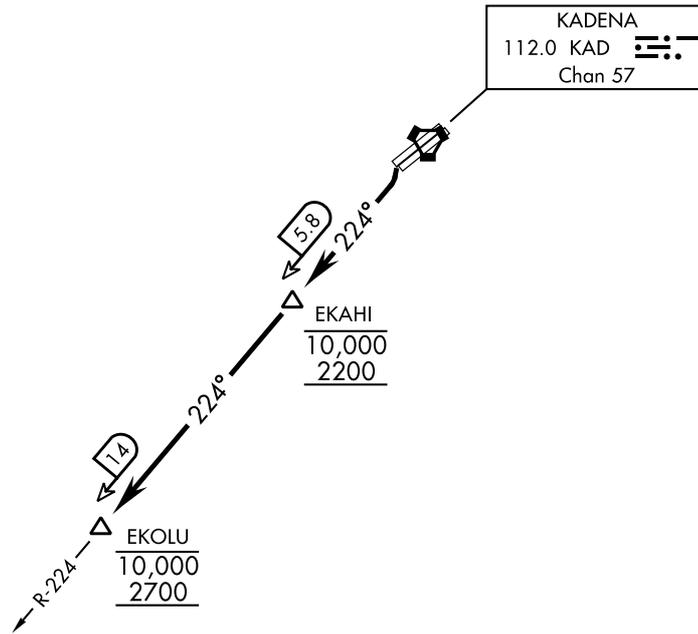

TLv FL140
 TA 14,000

CHANGE : Update



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 23L/23R: Climb left turn to intercept KAD VORTAC R-224 to EKOLU. Cross EKAHI at or above 2200 not to exceed 10,000, cross EKOLU at or above 2700 not to exceed 10,000, or altitude specified by ATC.

NOTE: REPRINTING DOD FLIP