


INSTRUMENT APPROACH CHART

RJSA / AOMORI


ILS Y or LOC Y RWY24 (CAT II & III)

SHIRAKAMI APP 119.25 - 315.3 - 120.65	ILS-LOC 111.9 IMR ILS-GP 331.1 ILS-DME CH-56X	AOMORI TOWER 118.3 - 126.2	RADAR AVBL
--	--	-------------------------------	------------

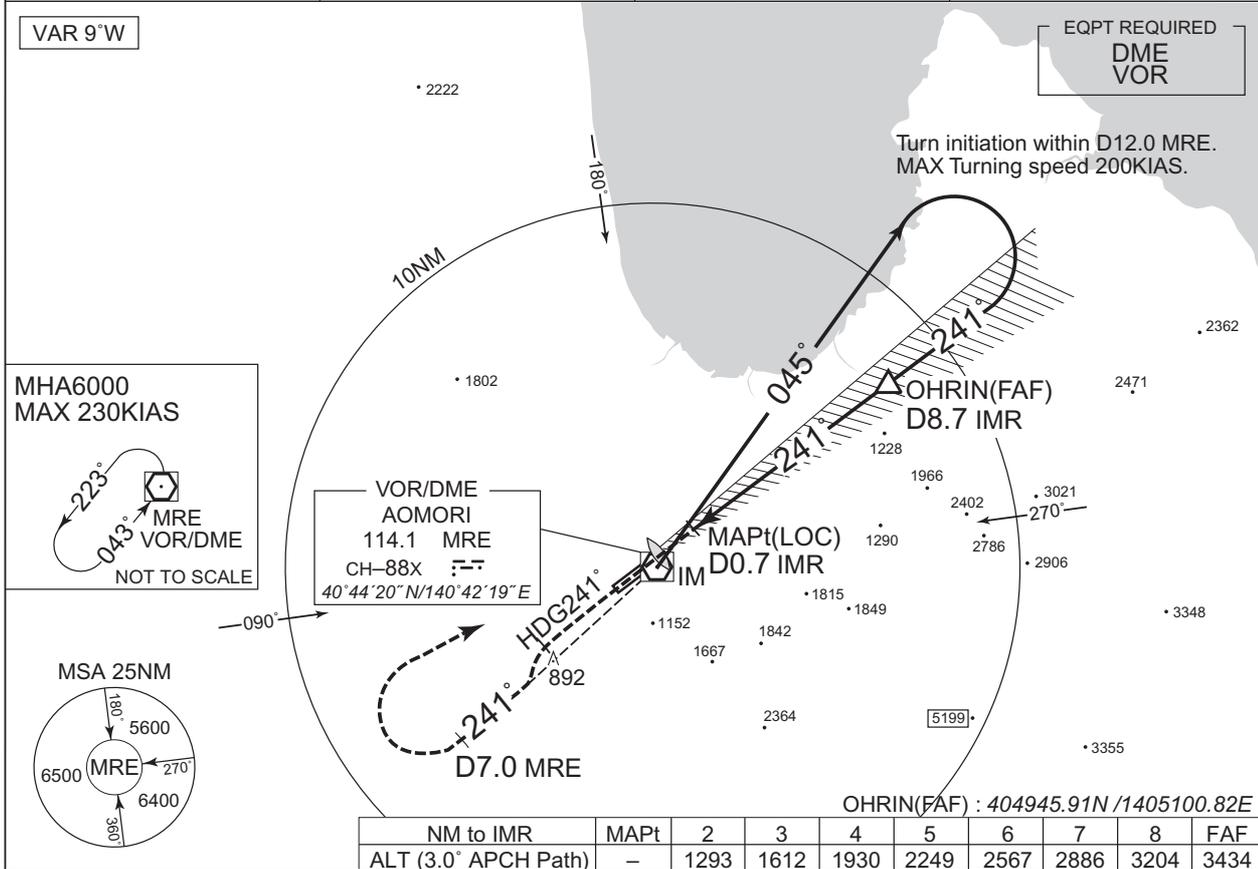

NM to IMR	MAPt	2	3	4	5	6	7	8	FAF
ALT (3.0° APCH Path)	-	1293	1612	1930	2249	2567	2886	3204	3434

CHANGE : Description of SDF(LOC) in profile view.

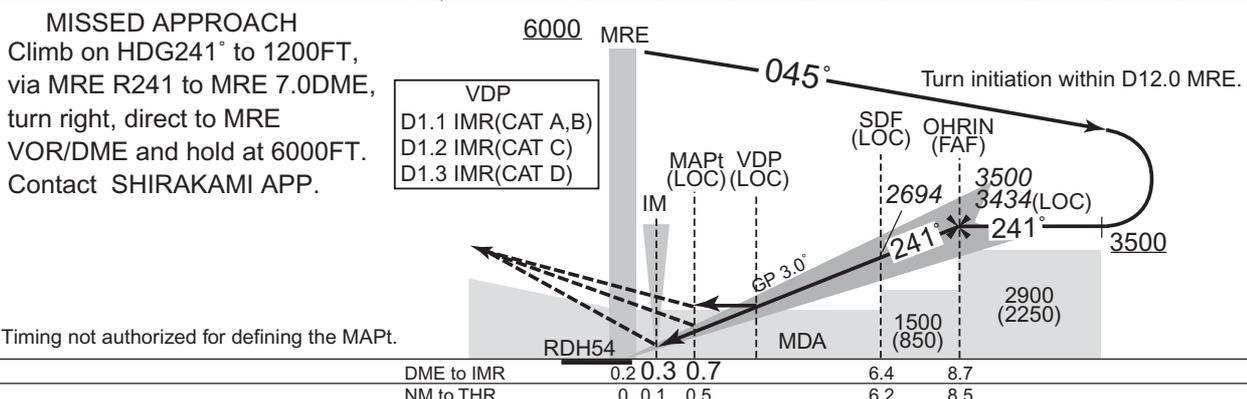

DME to IMR	0.2	0.3	0.7	6.4	8.7
NM to THR	0	0.1	0.5	6.2	8.5

Missed APCH climb gradient MNM 4.0%

MINIMA		THR elev. 664			AD elev. 650					
CAT	CAT III		CAT II		CAT I		LOC		CIRCLING	
	RVR	DA(DH)	RA	RVR	DA(H)	RVR/CMV	MDA(H)	RVR/CMV	MDA(H)	VIS
A							990 (340)	900		
B		764 (100)	92	300	864 (200)	550	1010 (360)	1000	1220 (570)	1600
C	100						1030 (380)			2400
D							1050 (400)	1400		3200

MINIMA with Missed APCH climb gradient of 2.5% are not established.  
Circling to NORTH side of RWY only.