



INSTRUMENT APPROACH CHART

RJNT / TOYAMA

RNP RWY02(AR)

KOBE CONTROL 132.45 - 125.6 304.4 - 317.1	RNP AR RF required.	TOYAMA TOWER 124.3 - 126.2	NO RADAR
---	------------------------	-------------------------------	----------

For uncompensated Baro-VNAV systems, procedure not authorized below -10°C / above 50°C

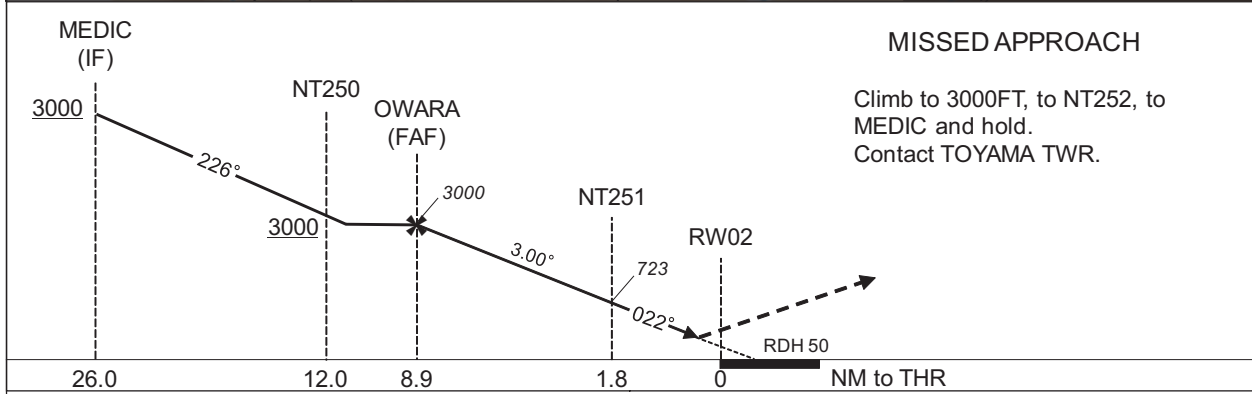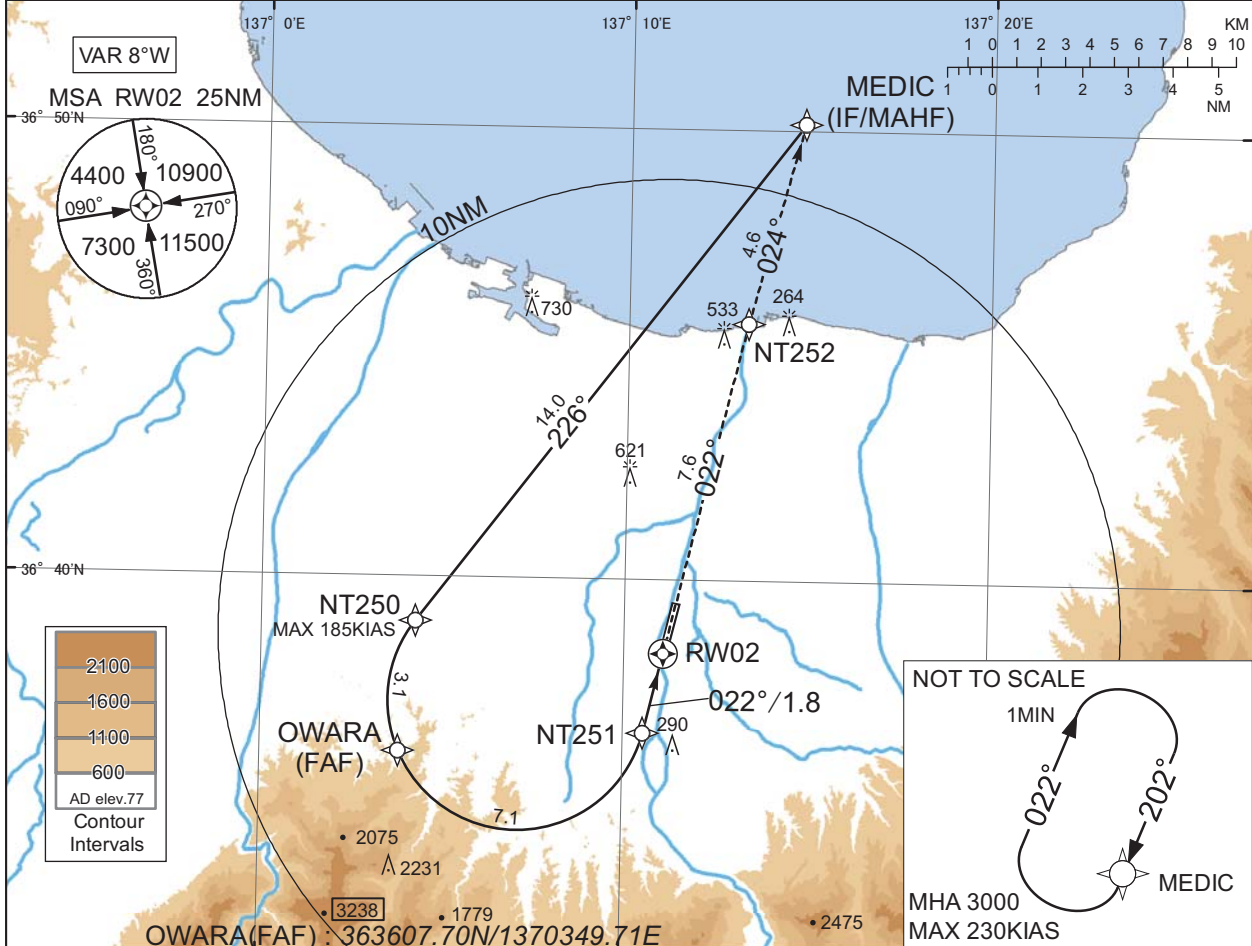

MINIMA	THR elev. 95	AD elev. 77
CAT	RNP 0.30	
	DA(H)	CMV
A	-	-
B	-	-
C	451(356)	1800
D		2000

**Authorization Required**

CHANGE : HLDG pattern for using NAVAID abolished.

INSTRUMENT APPROACH CHART

RJNT / TOYAMA

RNP RWY02(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/RDH (°/FT)	RNP Value
001	IF	MEDIC	-	-	-8.5	-	-	+3000	-	-	-
002	TF	NT250	-	226 (217.2)	-8.5	14.0	-	+3000	-185	-	1.0
003	RF Center: NTRF1 r=2.87NM	OWARA	-	-	-8.5	3.1	L	3000	-	-	1.0
004	RF Center: NTRF1 r=2.87NM	NT251	-	-	-8.5	7.1	L	723	-	-3.00	0.3
005	TF	RW02	Y	022 (013.5)	-8.5	1.8	-	145	-	-3.00/50	0.3
006	TF	NT252	-	022 (013.5)	-8.5	7.6	-	-	-	-	1.0
007	TF	MEDIC	-	024 (015.0)	-8.5	4.6	-	3000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	MEDIC	202 (193.6)	-8.5	1.0 (-14000)	R	3000	FL140	-230 (-14000)	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
MEDIC	365010.50N / 1371447.15E	NTRF1	363717.08N / 1370705.51E
NT250	363901.33N / 1370415.09E		
OWARA	363607.70N / 1370349.71E		
NT251	363636.65N / 1371033.43E		
RW02	363822.79N / 1371105.23E		
NT252	364543.55N / 1371317.58E		