# RNAV (GPS) Y RWY 12

TRI-CITIES (PSC)

| WAAS CH 58006 W12A | APP CRS 121° | Rwy Idg 7504 / TDZE 402 / Apt Elev 410 |
|---|---|---|

T A Baro-VNAV NA when using Hermiston altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C (7°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA with Hermiston altimeter setting. When local altimeter setting not received, use Hermiston altimeter setting: increase all DA 95 feet and all MDA 100 feet. Increase LPV all Cats visibilities ⅛ mile; LNAV/VNAV all Cats visibilities ⅜ mile; increase LNAV and Circling Cats C and D visibility ¼ mile.

MISSED APPROACH: Climb to 900 then climbing left turn to 3200 direct CITYS and hold.

| ATIS | SPOKANE APP CON ★ | TRI-CITIES TOWER ★ | GND CON | CLNC DEL | UNICOM |
|---|---|---|---|---|---|
| 125.65 | 128.75 377.2 | 135.3 (CTAF) L 323.3 | 121.8 | 120.0 | 122.95 |

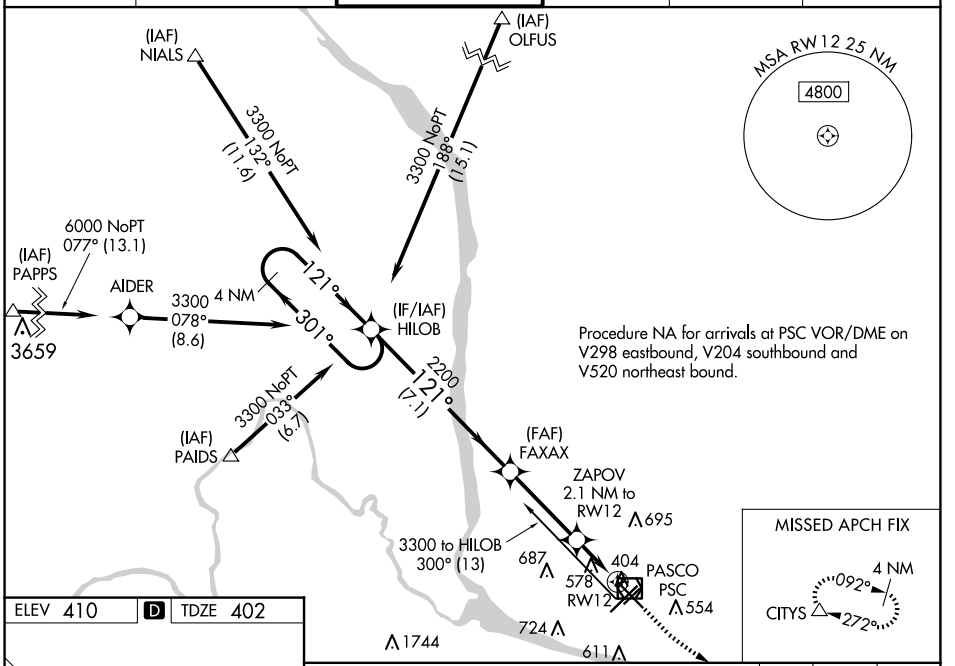


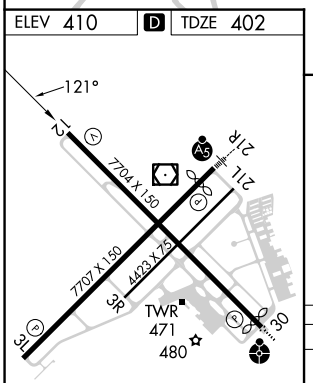


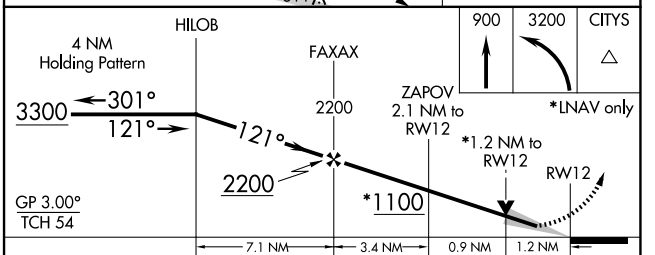


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 602-¾ 200 (200-¾) | | | |
| LNAV/VNAV DA | 755-1⅛ 353 (400-1⅛) | | | |
| LNAV MDA | 840-1 438 (500-1) | | 840-1⅜ 438 (500-1⅜) | |
| C CIRCLING | 880-1 470 (500-1) | 940-1 530 (600-1) | 1040-1¾ 630 (700-1¾) | 1100-2¼ 690 (700-2¼) |

REIL Rwys 3L and 12
MIRL Rwy 12-30 L
HIRL Rwy 3L-21R L



NW-1, 20 MAR 2025 to 17 APR 2025
NW-1, 20 MAR 2025 to 17 APR 2025