


ICAO - INSTRUMENT APPROACH CHART

8


DOC 8168 ED 6 - 2014 AMDT

CHANGE: APP ATS UNIT MODIFIED AND REMARK (6) ADDED

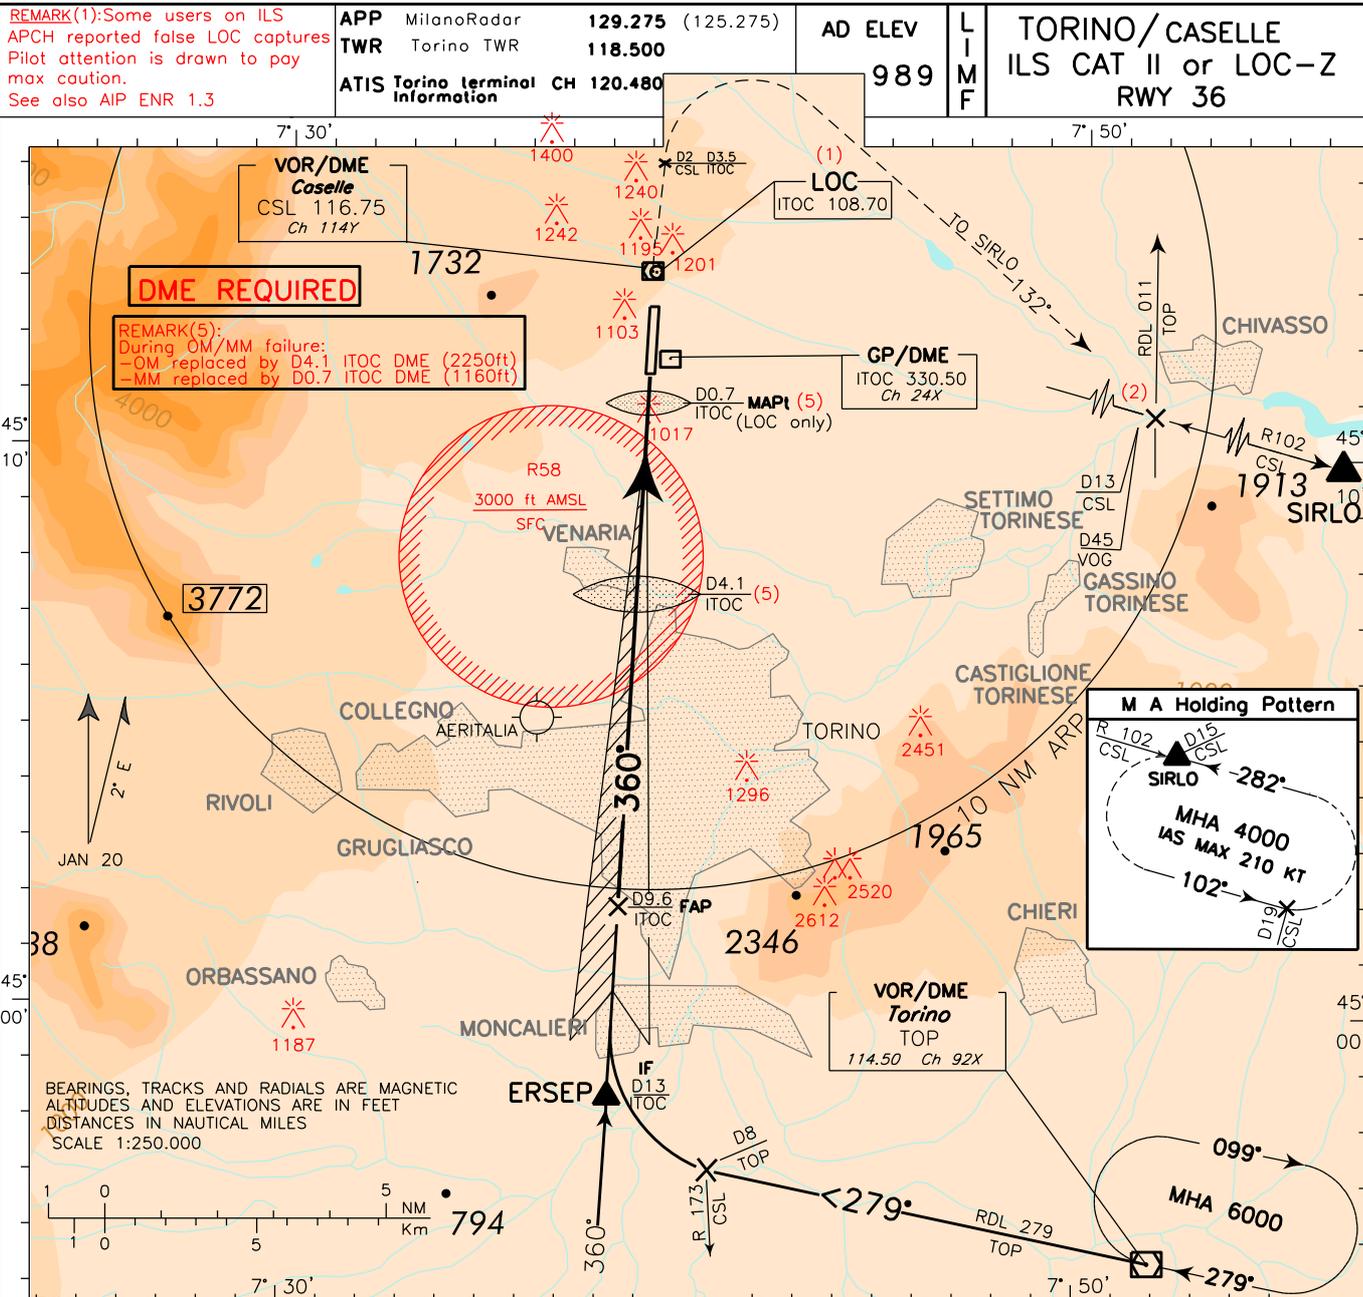

TRANSITION ALT 6000 MISSED APPROACH: Continue on TR 360° climbing to 4000 ft. At 2 NM CSL DME (3.5 NM ITOC DME) at 1500 ft or above, turn right (IAS MAX 220 kt) on TR 132° to join and follow RDL 102 CSL to SIRLO M.A. Holding Pattern.

REMARK (2): To overfly P 250 cross 13 NM CSL DME at 4000 ft or above.
 REMARK (6): Missed Approach obstacle clearance provided by 2.5% gradient. 3% gradient (182 FT/NM) is required to remain inside vertical limits of controlled airspace while proceeding to missed approach holding pattern.

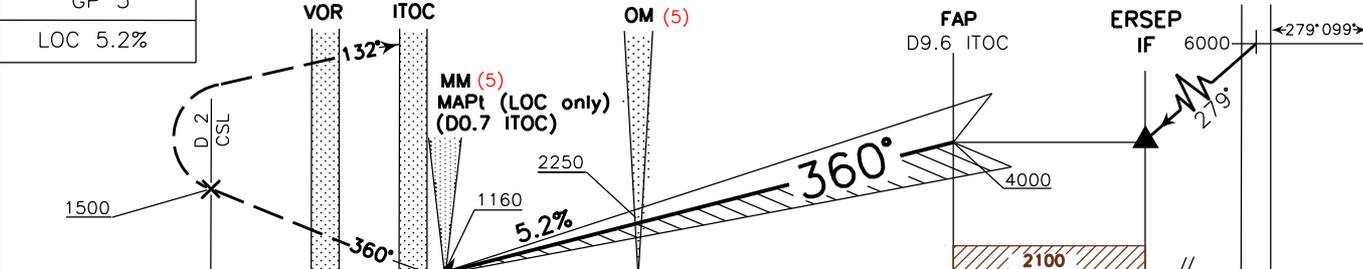

ITOC DME	D4	D3	D2	D1	D0	D1	D2	D3	D4	D5	D6	D7	D8	D9	D10	D11	D12	D13	ITOC DME
NM					0	1	2	3	4	5	6	7	8	9	10	11	12	13	NM

OCA(OCH)		A	B	C	D	(3) CIRCLING ALLOWED ONLY EAST OF RWY 	GS FT PER MIN OM-MM (4) MM-THR (4)	MNM SECT ALT VOR CSL				
STRAIGHT IN APPROACH	ILS I	1124 (190)	1136 (202)	1144 (210)	1155 (221)				100	531	2:03	0:18
	ILS II	995 (61)	1008 (74)	1020 (86)	1040 (106)				120	637	1:43	0:15
CIRCLING (3)		1600 (611)		1750 (761)		140	743	1:28	0:13			
						160	849	1:17	0:12			
						180	955	1:08	0:10			