

WAAS CH 45517 W28A	APP CRS 281°	Rwy Idg TDZE 413 Apt Elev 421
--	------------------------	---

RNAV (GPS) Z RWY 28

SYRACUSE HANCOCK INTL (SYR)

▼

▲


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-6°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.
For inop ALSF-2, increase LNAV Cats C/D visibility to 1½ mile.

ALSF-2

Ⓐ

MISSED APPROACH: Climb to 3000 direct SOLVA and on track 295° to WIFFY and hold.

ATIS 124.225	SYRACUSE APP CON 126.125 269.125	SYRACUSE TOWER 120.3 239.0	GND CON 121.7 348.6	CLNC DEL 125.05 257.775
------------------------	--	--------------------------------------	-------------------------------	-----------------------------------

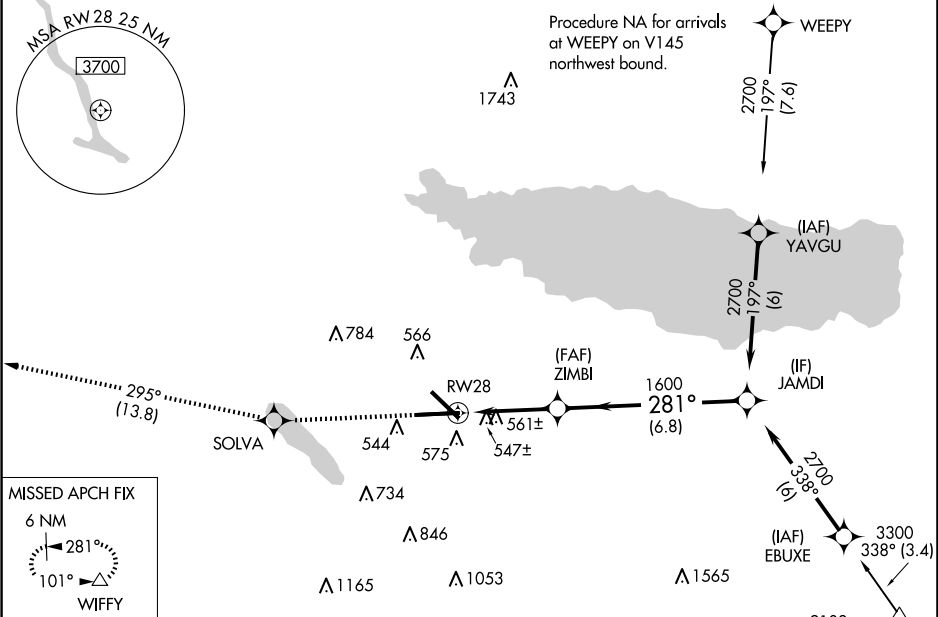

ELEV 421	D	TDZE 413
-----------------	----------	-----------------

