

LOC/DME I-ORF 109.1 Chan 28	APP CRS 047°	Rwy ldg 7809 TDZE 26 Apt Elev 27
--	------------------------	--

ILS or LOC RWY 5

NORFOLK INTL (ORF)




DME or RADAR required. RADAR required for procedure entry.

Autopilot coupled approach NA below 1180. For inop ALS, increase S-LOC 5 Cat C and D visibility to RVR 6000. ** RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSRR 

MISSED APPROACH: Climb to 2000 direct CCV VORTAC and hold.

ATIS 127.15	NORFOLK APP CON 118.9 353.7	NORFOLK TOWER 120.8 257.8	GND CON 121.9	CLNC DEL 118.5
-----------------------	---------------------------------------	-------------------------------------	-------------------------	--------------------------

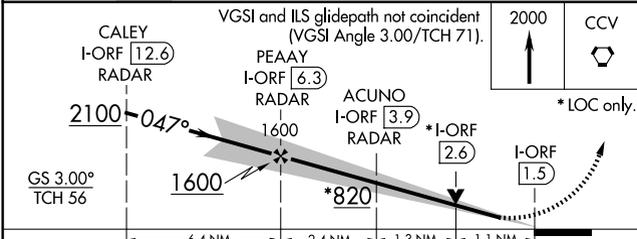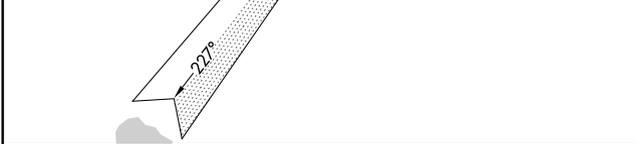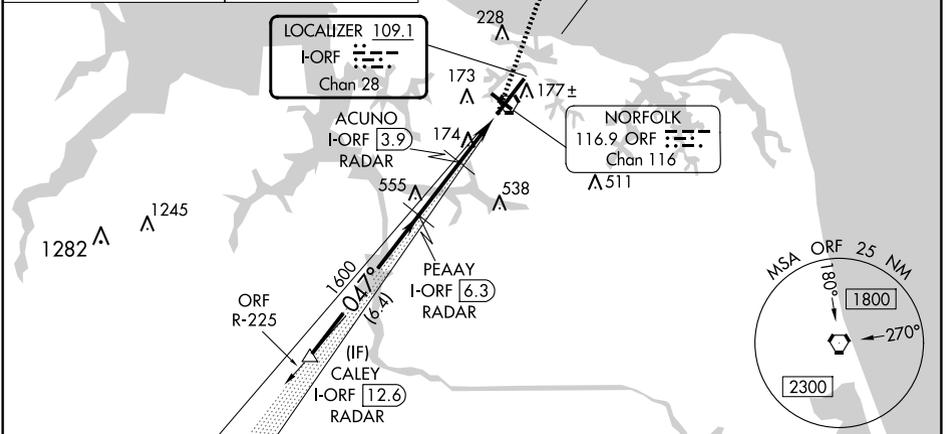

CATEGORY	A	B	C	D
S-ILS 5**		226/24	200 (200-½)	
S-LOC 5	440/24	414 (500-½)	440/40	414 (500-¾)
CIRCLING	480-1 453 (500-1)	540-1 513 (600-1)	540-1½ 513 (600-1½)	900-2¾ 873 (900-2¾)

ELEV 27	TDZE 26
REIL Rwy 14 and 32 HIRL Rwy 5-23 MIRL Rwy 14-32	
FAF to MAP 4.8 NM	
Knots	60 90 120 150 180
Min:Sec	4:48 3:12 2:24 1:55 1:36

NE-3, 20 MAR 2025 to 17 APR 2025

NE-3, 20 MAR 2025 to 17 APR 2025