


INSTRUMENT APPROACH CHART

RJAA / NARITA INTL


ILS Z RWY16R (CAT II & III)

TOKYO APP 124.4 – 127.7 120.2 – 225.65	ILS-LOC 111.5 IKF $\ddot{::}\ddot{::}$ ILS-GP 332.9 ILS-DME CH-52X	NARITA TOWER 118.2–122.7–126.2 236.8–121.95G	RADAR AVBL ATIS 128.25
--	---	--	---------------------------

Simultaneous approach authorized with RWY16L

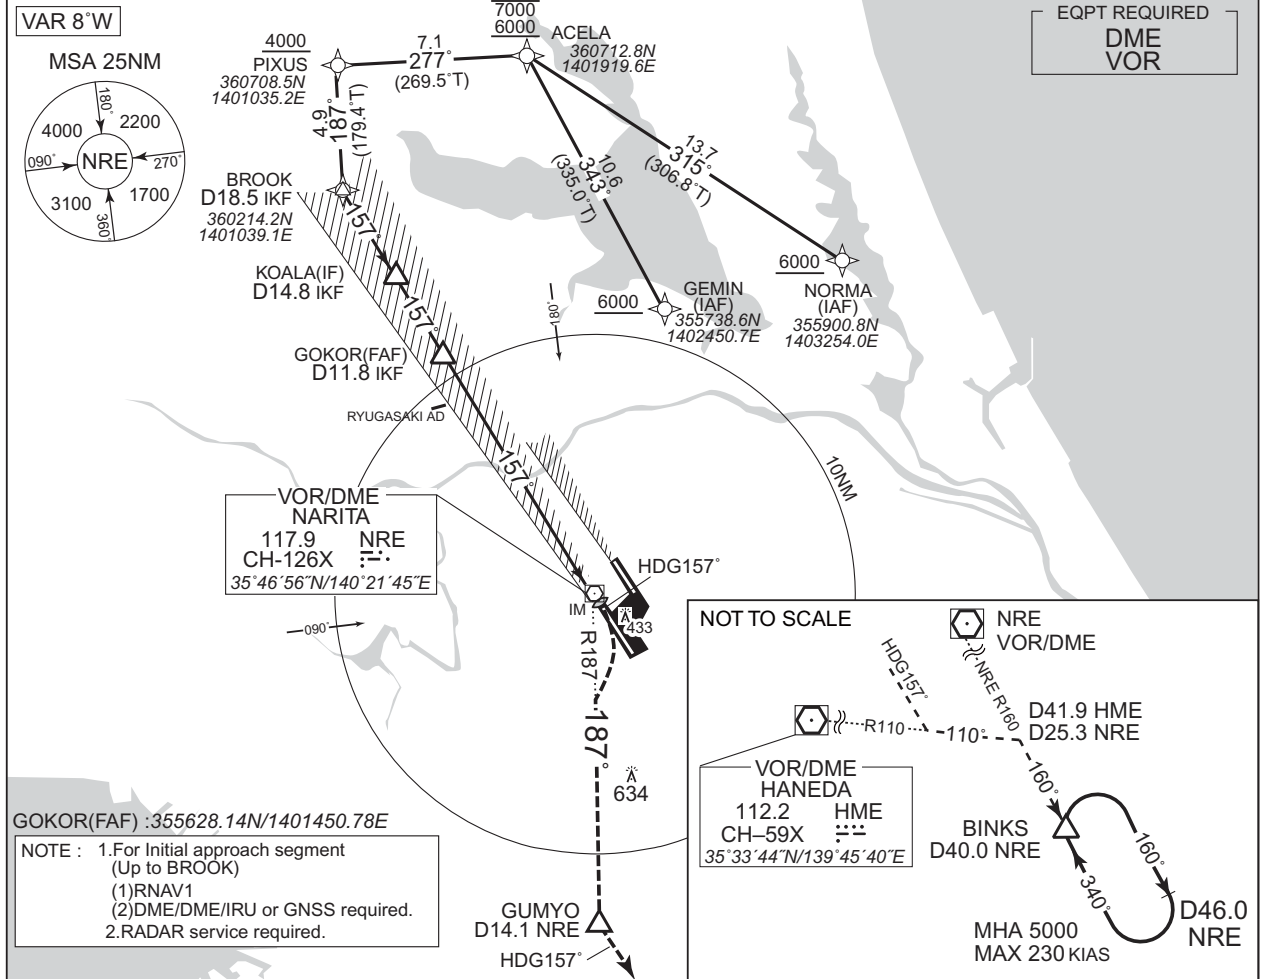

MISSED APPROACH

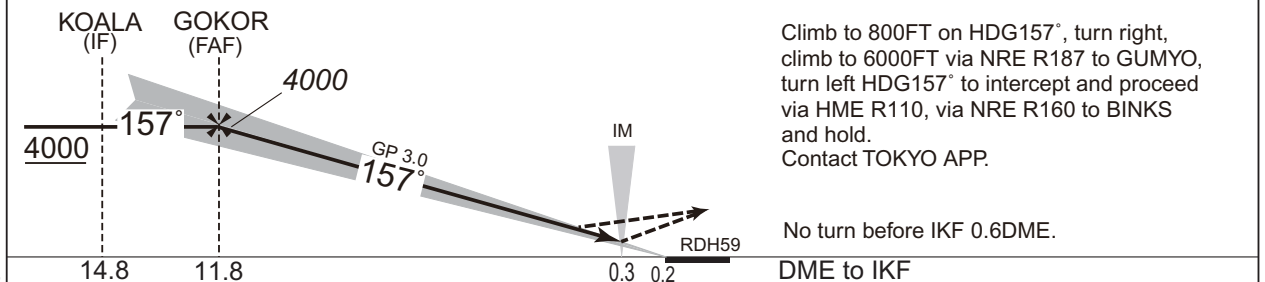

DME to IKF		14.8	11.8	0.3	0.2	DME to IKF		
NM to THR		14.6	11.6	0.2	0	NM to THR		
MINIMA		THR elev. 130			AD elev. 135			
CAT	CAT III	CAT II		CAT I		CIRCLING		VIS
	RVR	DA(H)	RA	RVR	DA(H)	RVR/CMV	MDA(H)	
A	100	230 (100)	101	300	330 (200)	550	730 (595)	1600
B								2400
C								3200
D								

CHANGE : Description of HLDG pattern.