

STANDARD DEPARTURE CHART -INSTRUMENT

RODN / KADENA



CUNEK FOUR DEPARTURE(RNAV1)

ATIS ★ 124.2 280.5 CLNC DEL 123.3 235.0 GND CON 118.5 275.8 TOWER 134.1 315.8 NAHA DEP CON 119.1 335.8 (NW) 126.5 258.3 (SE)	RNAV1 - GPS	Rwy	Knots	60	120	180	240	300	360
	RADAR required (non-GPS acft)	23L	V/V(fpm)	546	1092	1638	2184	2730	3276

DME/DME RNP - 0.3 NA

ATC Climb Rate to 2200

1194

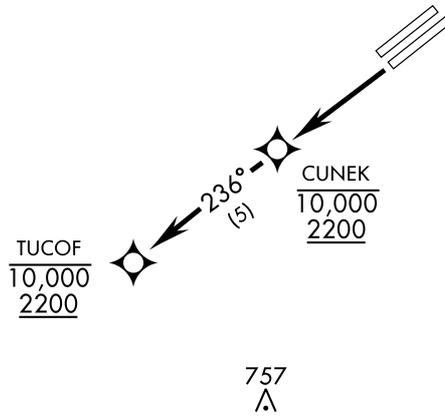

TLv FL140  
TA 14,000

CHANGE : Update.



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 23L: Climb direct CUNEK. Cross CUNEK at or above 2200, not to exceed 10,000, then track 236° to TUCOF, cross TUCOF at or above 2200 not to exceed 10,000, or altitude assigned by ATC.

NOTE: REPRINTING DOD FLIP