

STANDARD DEPARTURE CHART - INSTRUMENT

VAR9° W


D-ATIS 126.25
TWR 118.85(124.35)

ZYCC CHANGCHUN/Longjia
RNAV RWY06(ISLUK/BUTET)

BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS.
DME DISTANCES IN
NAUTICAL MILES.
DISTANCES IN KM.

APP01 119.45(127.9)
APP02 125.25(127.9)
APP03 120.2(127.9)

TL 3600
TA 3000
3300(QNH ≥ 1031hPa)
2700(QNH ≤ 979hPa)




NOT TO SCALE

RNAV1
GNSS, RADAR REQUIRED

Note:

- When aircraft ALT is 3000m(QNH) or below,
MAX IAS is 250kt;
- BUTET-71D/72D shall be used for CCO procedure
with ATC approval, and the CCO operation time
1400-2200;
CCO terminated once ATC give heading instructions.

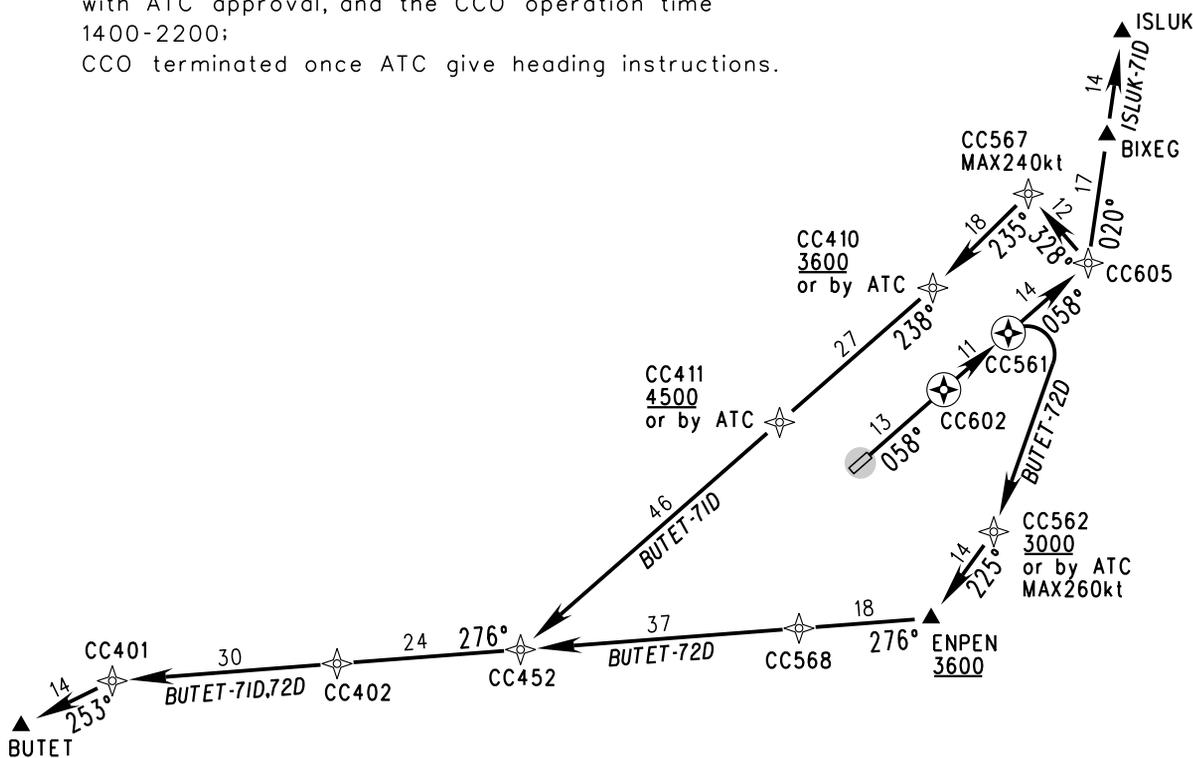

SID	ROUTING
ISLUK-71D	CC605-BIXEG-ISLUK
BUTET-71D	CC602-CC561-CC605-CC567-CC410-CC411-CC452-CC402-CC401-BUTET
BUTET-72D	CC602-CC561-CC562-ENPEN-CC568-CC452-CC402-CC401-BUTET

Changes: APP03.