

ATC SURVEILLANCE MINIMUM ALTITUDE CHART - ICAO

AD ELEV 40  
TRANSITION ALT 6000

APP Padova Radar 119.175

TRIESTE/  
Ronchi dei Legionari (LIPQ)

BEARINGS ARE MAGNETIC VAR 2°E (JAN 2005)


CHART ONLY TO BE USED FOR CROSS-CHECKING OF ALT/FL ASSIGNED BY PADOVA RADAR

ALTITUDES AND ELEVATIONS ARE IN FEET

IN CASE OF COM FAILURE SET TRANSPONDER CODE 7600

MINIMUM LEVELS/ALTITUDES ASSIGNED BY ATC INCLUDE A CORRECTION FOR LOW TEMPERATURE EFFECT

CHANGE: NEW CHART

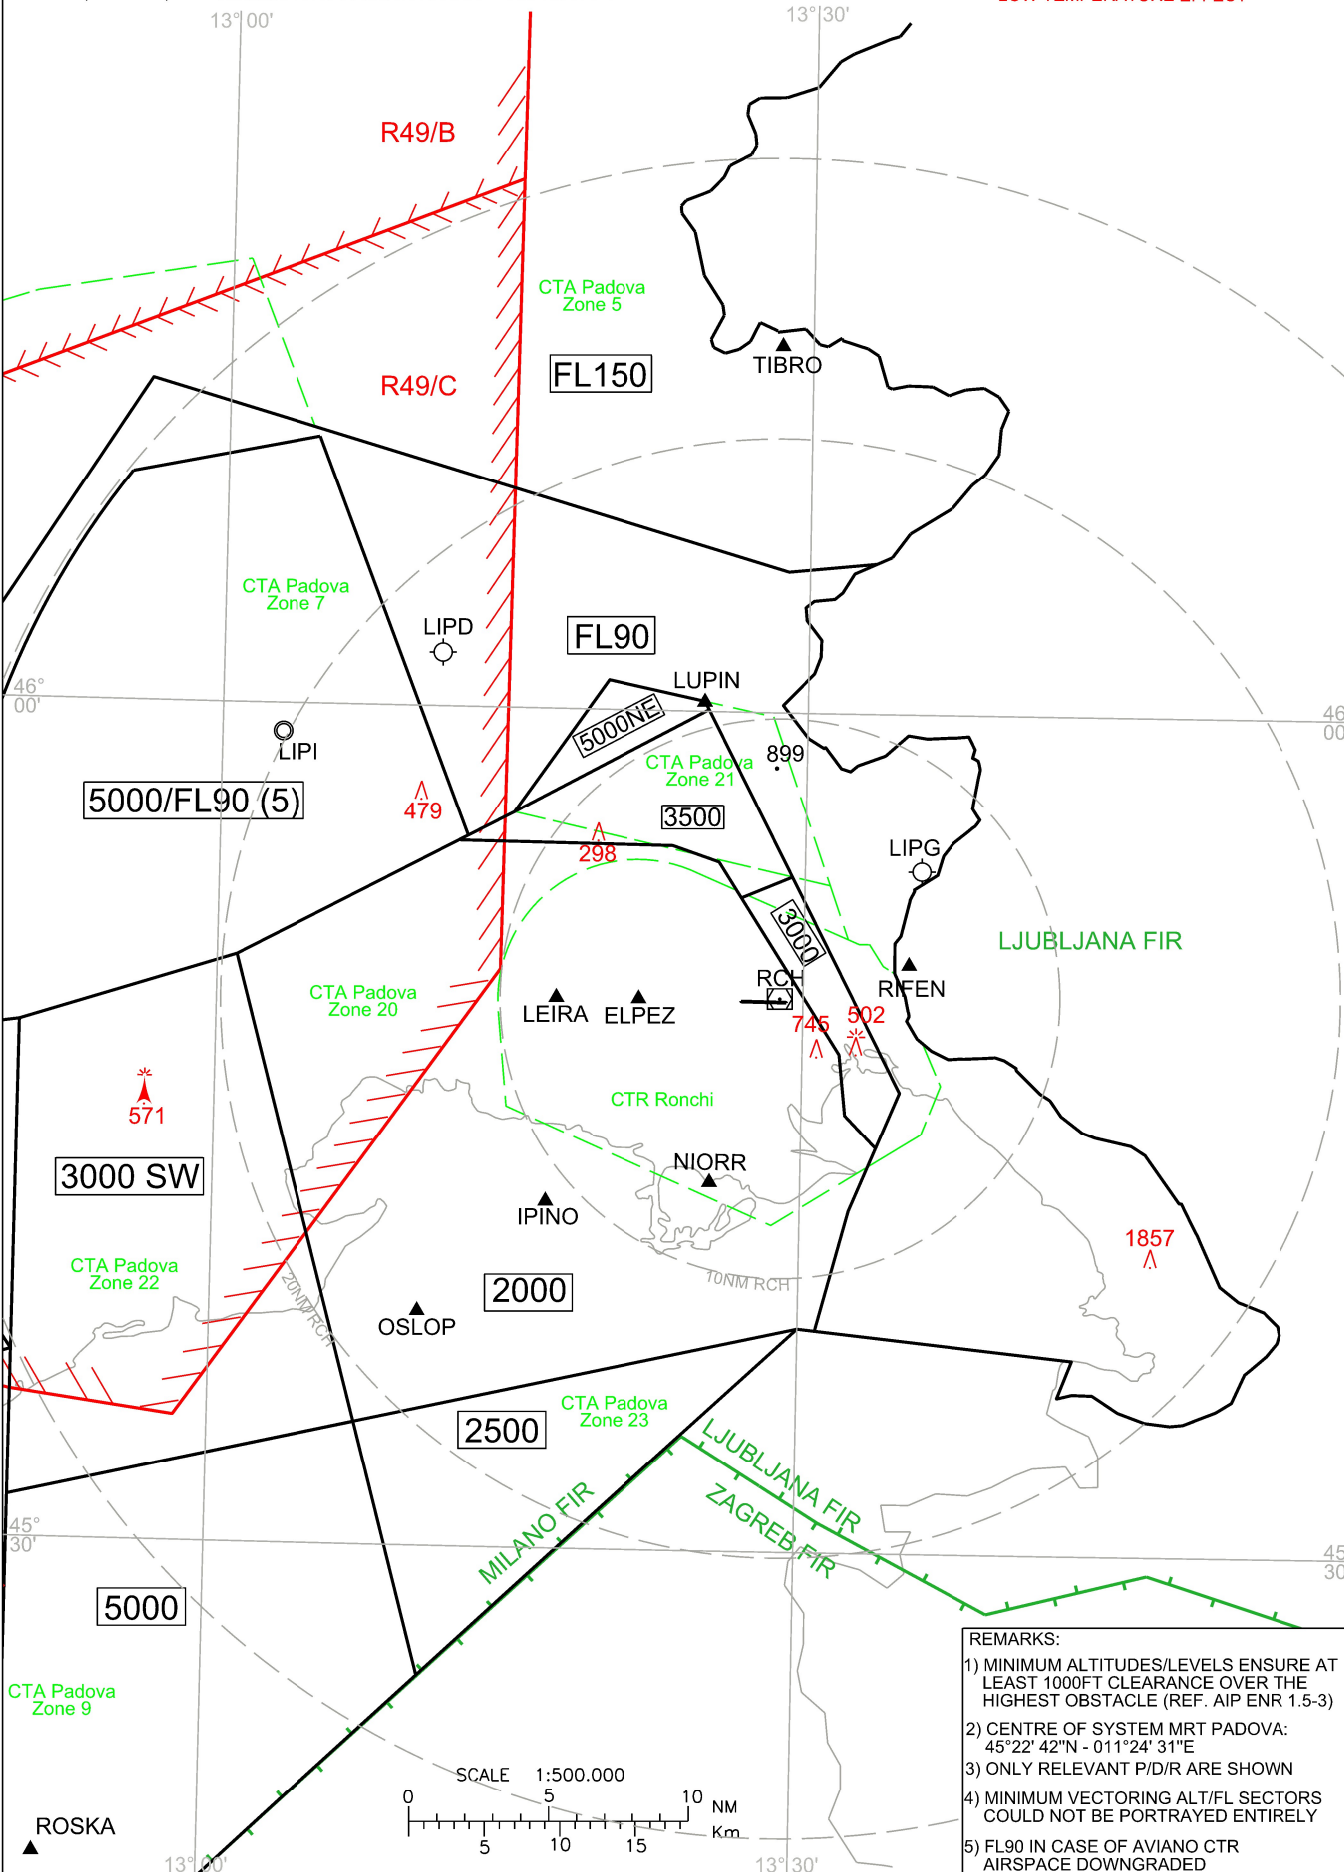

- REMARKS:
- 1) MINIMUM ALTITUDES/LEVELS ENSURE AT LEAST 1000FT CLEARANCE OVER THE HIGHEST OBSTACLE (REF. AIP ENR 1.5-3)
  - 2) CENTRE OF SYSTEM MRT PADOVA: 45°22' 42"N - 011°24' 31"E
  - 3) ONLY RELEVANT P/D/R ARE SHOWN
  - 4) MINIMUM VECTORING ALT/FL SECTORS COULD NOT BE PORTRAYED ENTIRELY
  - 5) FL90 IN CASE OF AVIANO CTR AIRSPACE DOWNGRADED