



**INSTRUMENT
APPROACH
CHART - ICAO**

SHEREMETYEVO RADAR 118.100 120.675 122.700 126.600 135.175
SHEREMETYEVO TOWER 118.700 120.700 131.500

**MOSCOW, RUSSIA
SHEREMETYEVO
NDB RWY 24L**

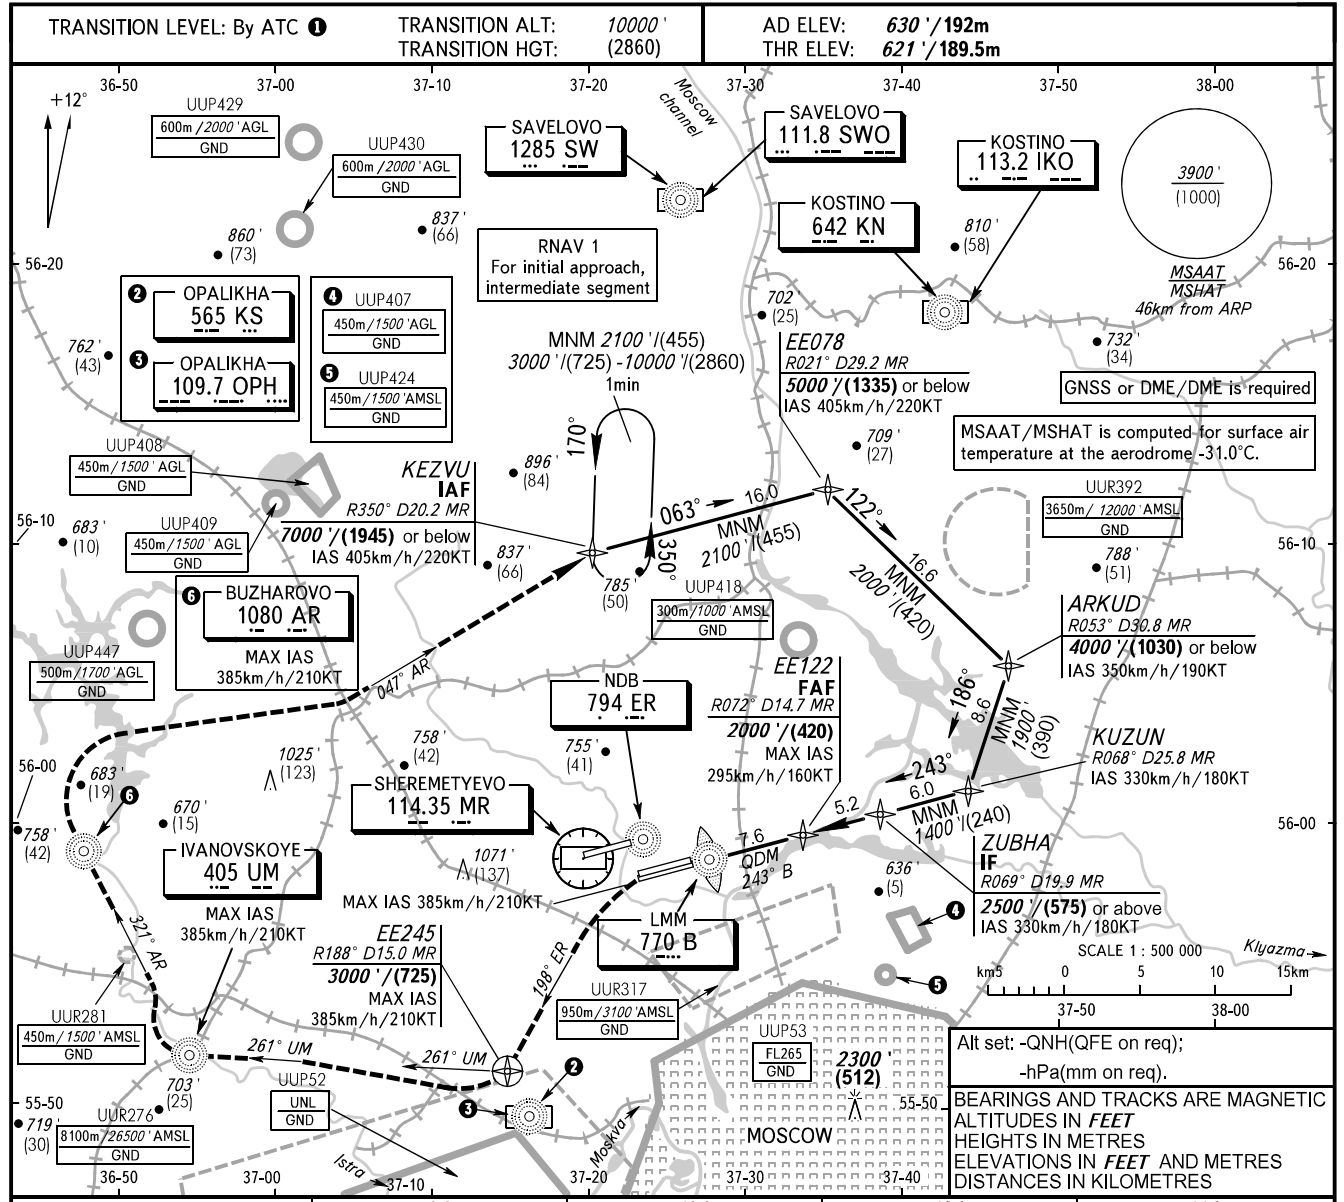

DME MR	8.0	10.0	12.0	14.0
ALTITUDE/HEIGHT	840'/(70)	1180'/(145)	1520'/(275)	1860'/(380)

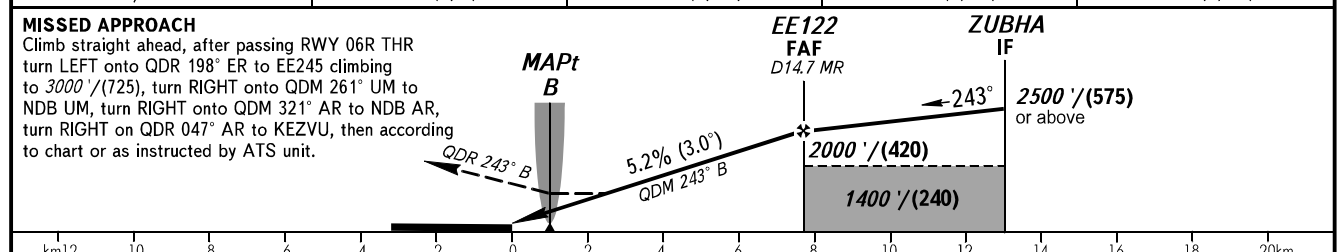

OCA(H)		A	B	C	D	TRANSITION LEVEL:														
Straight-in	Approach	1100' (480')	1100' (480')	1100' (480')	1100' (480')	- FL110 when QNH is 1013 hPa (760mm mercury column) or above; - FL120 when QNH is 977 hPa (733mm mercury column) or above, but less than 1013 hPa (760mm mercury column); - FL130 when QNH is less than 977 hPa (733mm mercury column).														
		(150)	(150)	(150)	(150)															
GROUND SPEED		km/h	150	180	210	240	270	300	330	360	390	420	450							
RATE OF DESCENT		m/s	2.2	2.6	3.1	3.5	3.9	4.3	4.8	5.2	5.6	6.1	6.5							
		ft/min	427	512	597	683	768	853	939	1024	1109	1195	1280							

CHANGE: UUP447