
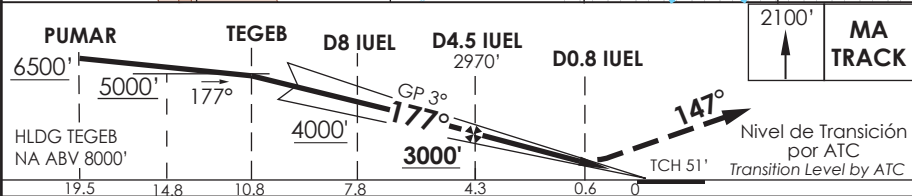


ATIS 132.1	SANTIAGO RADAR Santiago Radar 119.7/129.7	TORRE SANTIAGO Santiago Tower 118.1/118.35	CONTROL TERRESTRE GNDC W 122.5/122.6	Ground Control GNDC E 122.2/122.6
LOC IUEL 110.3	FINAL APCH CRS 177°	GP D4.5 IUEL 3000'	ILS DA (H) 1750'(200')	AD Elev. 1555' THR 17L Elev. 1550'
APCH FRUSTRADA: ASC 2100' viraje izquierda para continuar vía RNAV MA TR to TEGEB 6000', luego según autorización ATC . Ⓢ Missed Apch: Climb to 2100' left turn to continue via RNAV MA TR to TEGEB 6000', then according ATC clearance. Ⓢ				19000 FT
				MSA 25 NM AMB

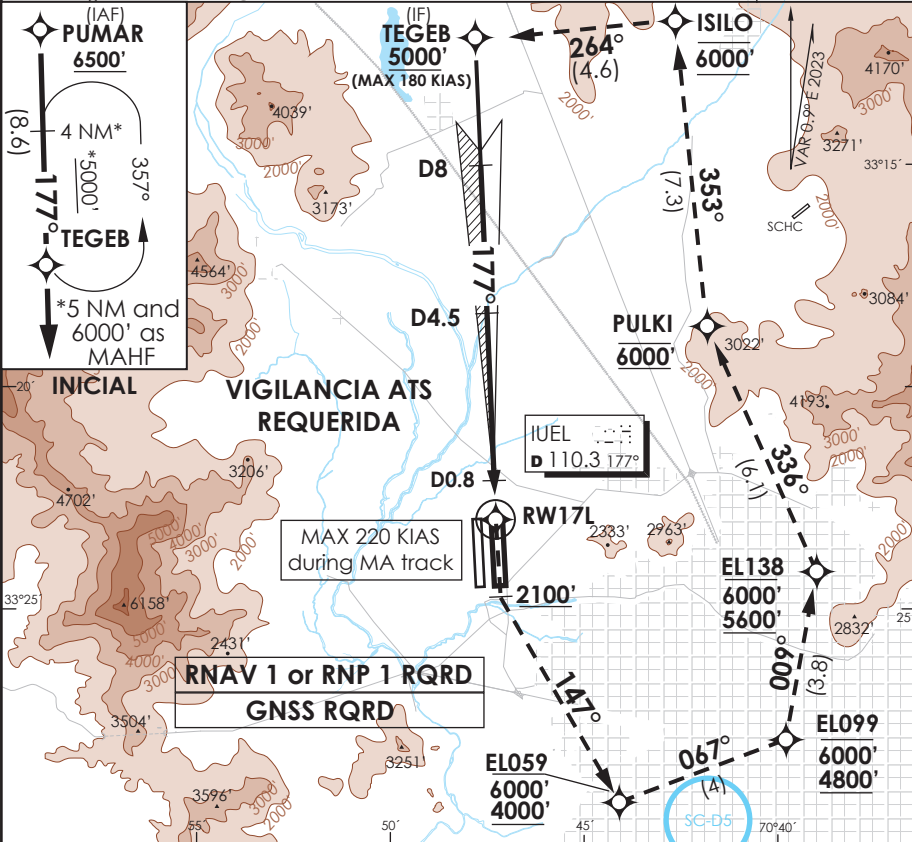

C A T	DIRECTO RWY 17L <i>Straight in RWY 17L **</i>					CIRCULANDO Circling	ALTN <i>Alternate Minimums</i>	
	ILS DA 1750' (200')		LOC 1980' (430')					
	ALSF-2		ALSF-2					
	TDZL v RCLL	WO TDZL v RCLL	WO ALSF-2	ALSF-2	WO ALSF-2			
A	RVR 550m	RVR 550m*	1.2 Km	1.2 Km	1.6 Km	NA	VER PAG. See page GEN 2.19 GEN 2.19	
B	0	0		1.6 Km	2.0 Km			
C	0.8 Km	0.8 Km		2.0 Km	2.4 Km			
D								
* Ver página GEN 2.11 See page GEN 2.11			① MNM razón ASC APCH Frustrada: 320FT/NM hasta 6000' <i>Missed APCH MNM climb rate: 320 FT/NM to 6000'</i>			APCH simultanea AUTH <i>Simultaneous APCH authorized</i>		
Veloc. Terrestre Kts		80	100	120	140	** WO IUEL DME PROC NA PROCEDURE NA WITHOUT IUEL DME		
GP 3° FPM		425'	531'	637'	743'			849'
MIN:SEC (FAF to MAPt)								