

APP CRS

319°

Rwy ldg

7822

TDZE

439

Apt Elev

459

RNAV (GPS) RWY 32L

SCOTT AFB/MIDAMERICA ST LOUIS (BLV)


RNP APCH-GPS.

For inop ALS, increase LNAV Cat C/D visibility to 1 3⁄8 mile.

ALSF-1

MISSED APPROACH: Climb to 1500 then climbing left turn to 2400 direct QODCU and hold.

ATIS ★ 128.7 256.7	ST LOUIS APP CON 125.2 281.5	SCOTT TOWER 128.25 253.5	GND CON 119.2 275.8	CLNC DEL 119.875 263.025
-----------------------	---------------------------------	-----------------------------	------------------------	-----------------------------

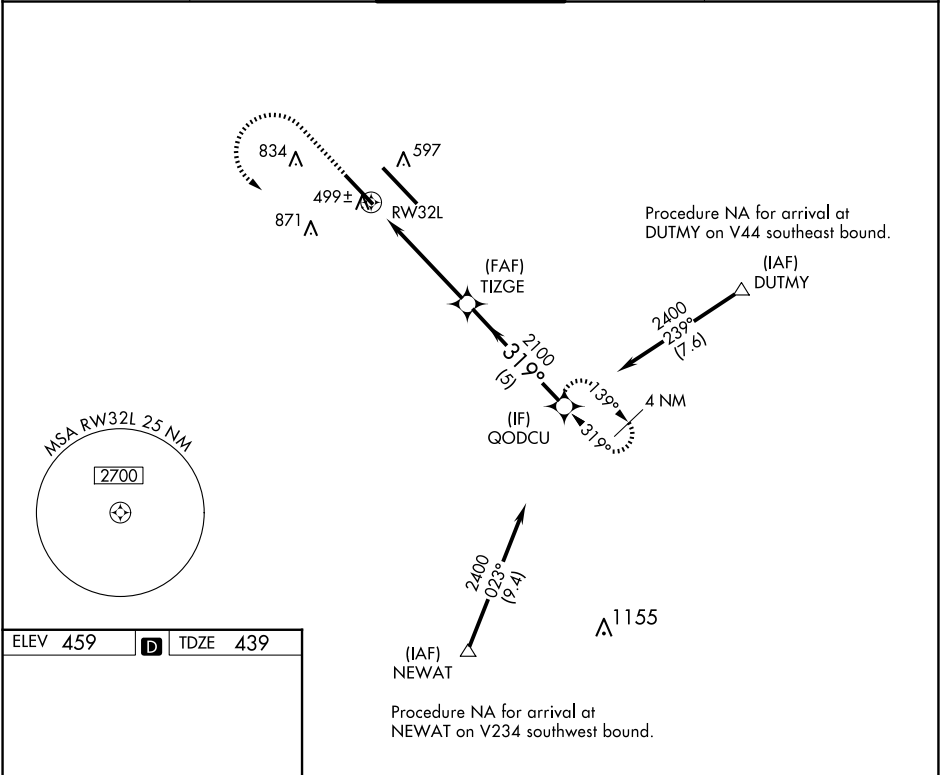

ELEV 459

TDZE 439

REIL Rwy 14L
HIRL Rwy 14R-32L and 14L-32R

1500

2400

QODCU

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 50).

Profile view showing descent from 2400 ft to 2100 ft (3.03° TCH 55) and then to 1500 ft. Distances: 1.4 NM to RW32L, 3.7 NM to TIZGE, 5 NM to QODCU.

CATEGORY	A	B	C	D
LNAV MDA	920/24	481 (500-1⁄2)	920/50	481 (500-1)
CIRCLING	1000-1 541 (600-1)	1120-1 661 (700-1)	1240-2 1⁄4 781 (800-2 1⁄4)	1240-2 1⁄2 781 (800-2 1⁄2)

EC-3, 20 MAR 2025 to 17 APR 2025

EC-3, 20 MAR 2025 to 17 APR 2025