


STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO

TRANSITION ALTITUDE 6500

Kraków APPROACH 133.030
Rzeszów GROUND 121.805
Rzeszów TOWER 126.805

Rzeszów - Jasionka
RNP RWY 27
DIBED 2R, ETITI 2R, GOVRI 2R
LUMEQ 1R, LUXAR 2R, VELAX 2R

Correction: FREQ Kraków APPROACH added.

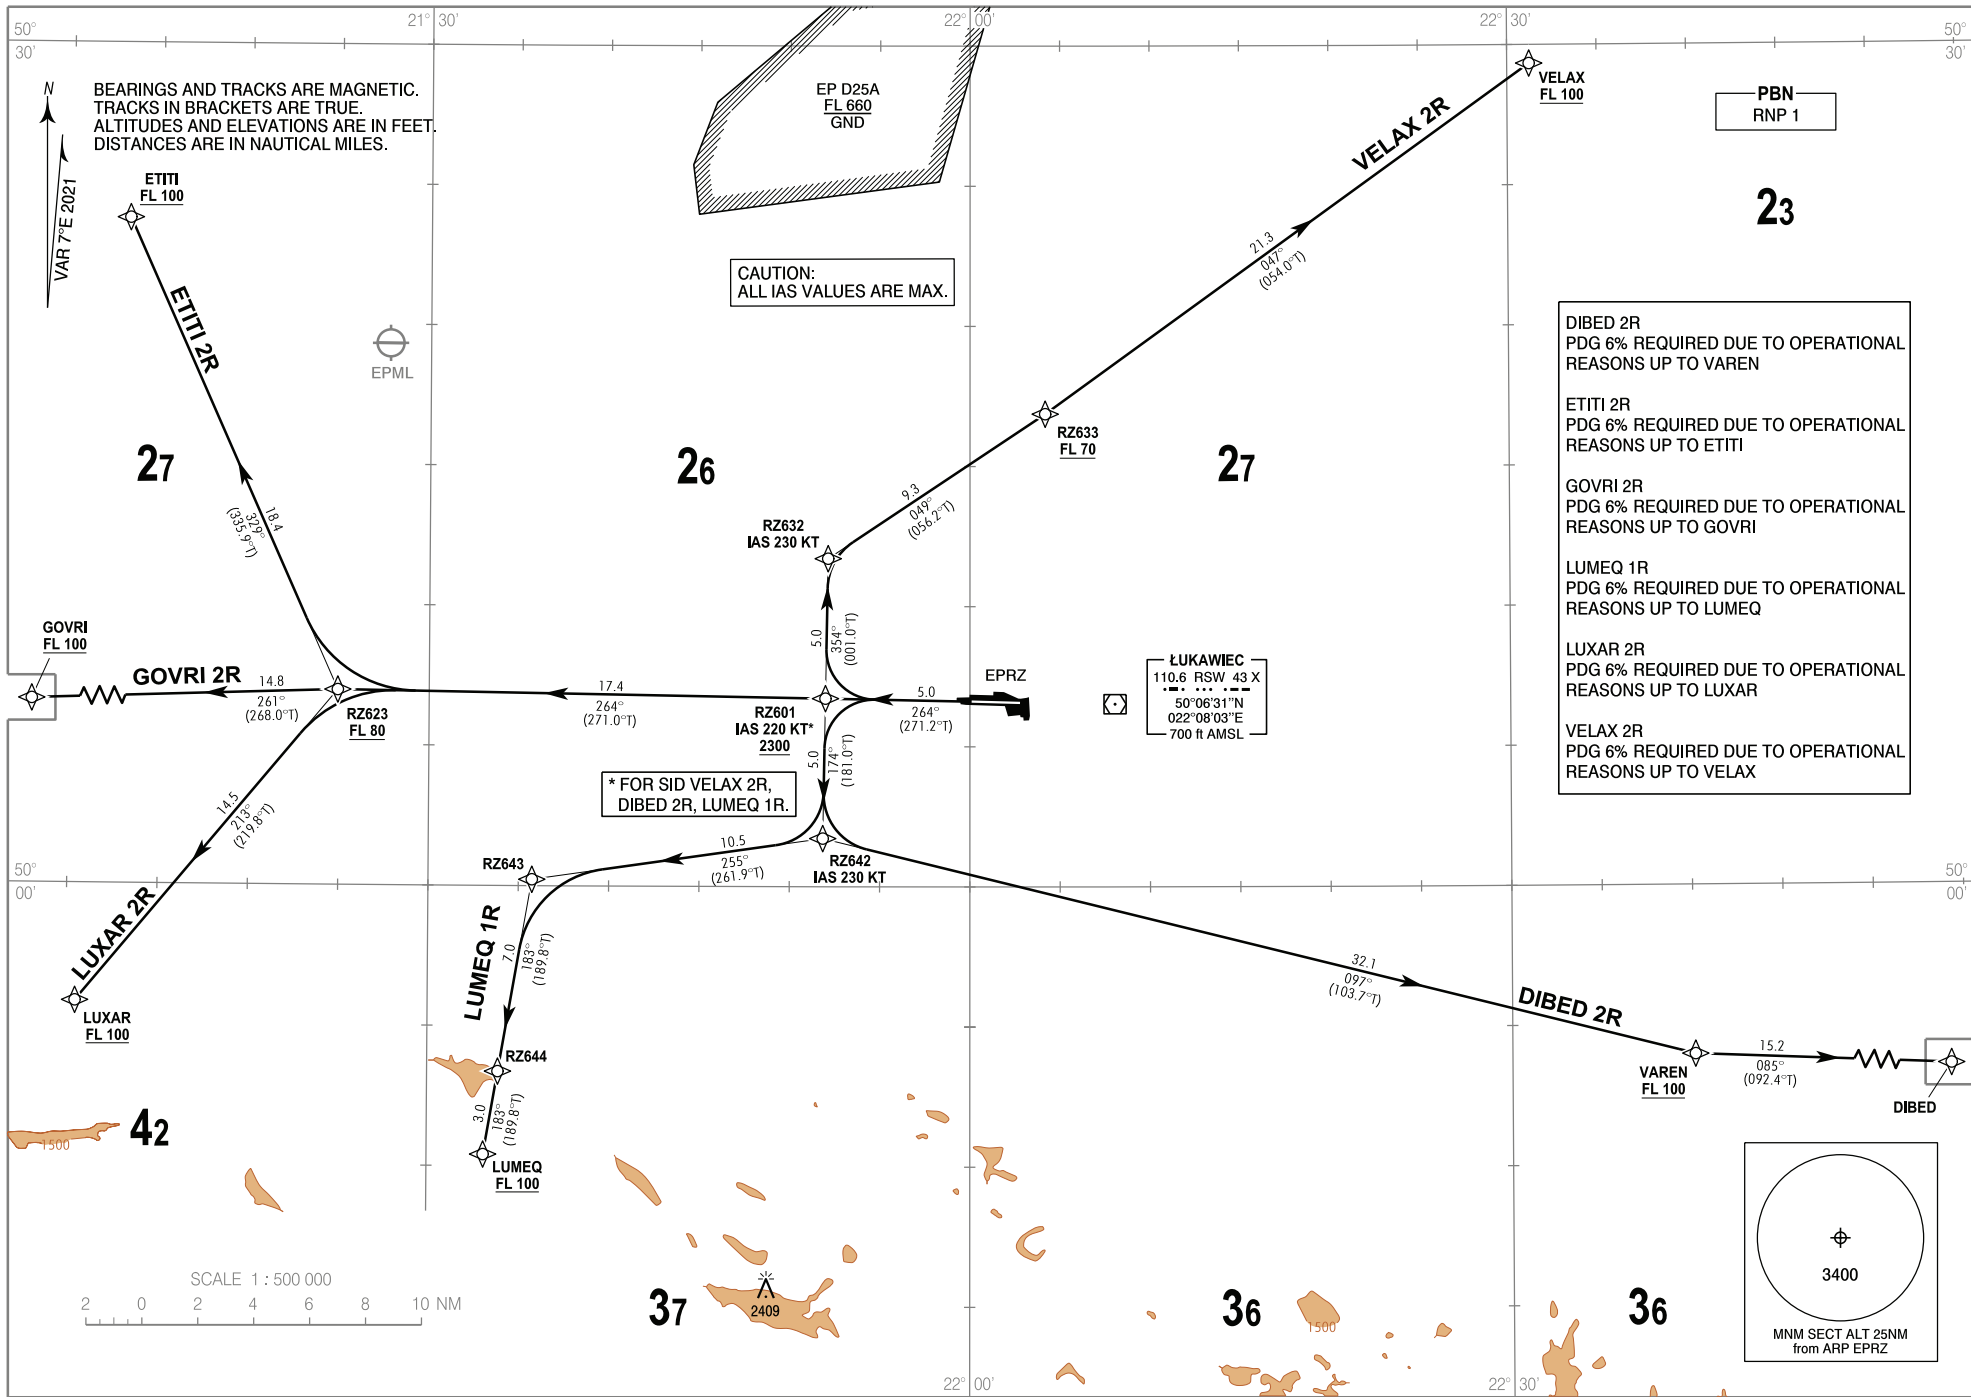

I

STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO

Rzeszów - Jasionka
RNP RWY 27
DIBED 2R ETITI 2R GOVRI 2R LUMEQ 1R LUXAR 2R VELAX 2R

DIBED 2R

PDG 6% REQUIRED DUE TO OPERATIONAL REASONS UNTIL VAREN

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY-OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	RZ601	-	264 (271.2)	5.00	-	+2300 ft	-220	RNP 1
002	TF	RZ642	-	174 (181.0)	5.00	-	-	-230	RNP 1
003	TF	VAREN	-	097 (103.7)	32.11	-	+FL100	-	RNP 1
004	TF	DIBED	-	085 (092.4)	15.15	-	-	-	RNP 1

ETITI 2R

PDG 6% REQUIRED DUE TO OPERATIONAL REASONS UNTIL ETITI

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY-OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	RZ601	-	264 (271.2)	5.00	-	+2300 ft	-	RNP 1
002	TF	RZ623	-	264 (271.0)	17.42	-	+FL80	-	RNP 1
003	TF	ETITI	-	329 (335.9)	18.42	-	+FL100	-	RNP 1

GOVRI 2R

PDG 6% REQUIRED DUE TO OPERATIONAL REASONS UNTIL GOVRI

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY-OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	RZ601	-	264 (271.2)	5.00	-	+2300 ft	-	RNP 1
002	TF	RZ623	-	264 (271.0)	17.42	-	+FL80	-	RNP 1
003	TF	GOVRI	-	261 (268.0)	14.83	-	+FL100	-	RNP 1

LUMEQ 1R

PDG 6% REQUIRED DUE TO OPERATIONAL REASONS UNTIL LUMEQ

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY-OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	RZ601	-	264 (271.2)	5.00	-	+2300 ft	-220	RNP 1
002	TF	RZ642	-	174 (181.0)	5.00	-	-	-230	RNP 1
003	TF	RZ643	-	255 (261.9)	10.49	-	-	-	RNP 1
004	TF	RZ644	-	183 (189.8)	6.96	-	-	-	RNP 1
005	TF	LUMEQ	-	183 (189.8)	3.01	-	+FL100	-	RNP 1

LUXAR 2R

PDG 6% REQUIRED DUE TO OPERATIONAL REASONS UNTIL LUXAR

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY-OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	RZ601	-	264 (271.2)	5.00	-	+2300 ft	-	RNP 1
002	TF	RZ623	-	264 (271.0)	17.42	-	+FL80	-	RNP 1
003	TF	LUXAR	-	213 (219.8)	14.54	-	+FL100	-	RNP 1

VELAX 2R

PDG 6% REQUIRED DUE TO OPERATIONAL REASONS UNTIL VELAX

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY-OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	RZ601	-	264 (271.2)	5.00	-	+2300 ft	-220	RNP 1
002	TF	RZ632	-	354 (001.0)	5.00	-	-	-230	RNP 1
003	TF	RZ633	-	049 (056.2)	9.31	-	+FL70	-	RNP 1
004	TF	VELAX	-	047 (054.0)	21.34	-	+FL100	-	RNP 1

WAYPOINT IDENTIFIER	COORDINATES	
DIBED	49 53 18.0 N	023 03 30.0 E
ETITI	50 23 45.0 N	021 13 11.0 E
GOVRI	50 06 25.3 N	021 01 54.0 E
LUMEQ	49 50 24.6 N	021 33 07.5 E
LUXAR	49 55 48.0 N	021 10 31.0 E
RZ601	50 06 42.7 N	021 51 59.1 E
RZ623	50 06 57.9 N	021 24 55.6 E
RZ632	50 11 42.4 N	021 52 07.3 E
RZ633	50 16 52.1 N	022 04 11.0 E
RZ642	50 01 43.1 N	021 51 50.9 E
RZ643	50 00 13.6 N	021 35 45.0 E
RZ644	49 53 22.4 N	021 33 54.9 E
VAREN	49 53 58.0 N	022 40 06.0 E
VELAX	50 29 20.0 N	022 31 14.0 E