
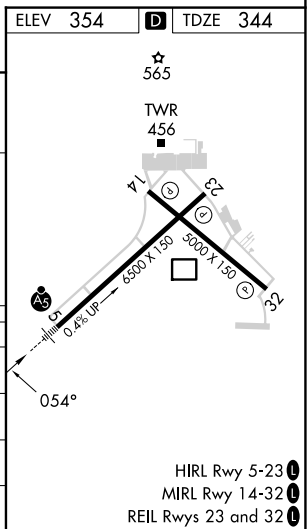
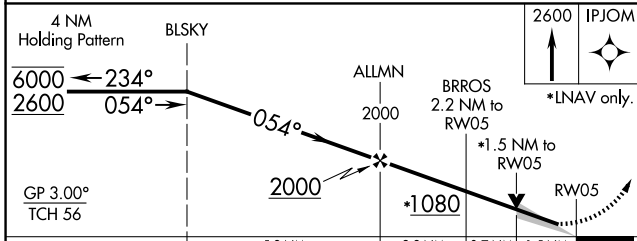


WAAS CH <b>97315</b> <b>W05A</b>	APP CRS <b>054°</b>	Rwy Idg TDZE <b>344</b> Apt Elev <b>354</b>
--	------------------------	---

# RNAV (GPS) RWY 5

MIDDLE GEORGIA RGNL (MCN)

RNP APCH.		MALSRL	MISSED APPROACH: Climb to 2600 direct IPJOM and hold.	
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C.				
ATIS <b>120.775</b>	ATLANTA APP CON ★ <b>124.2 279.6</b>	MACON TOWER ★ <b>128.2 (CTAF) 257.8</b>	GND CON <b>121.65</b>	UNICOM <b>122.95</b>

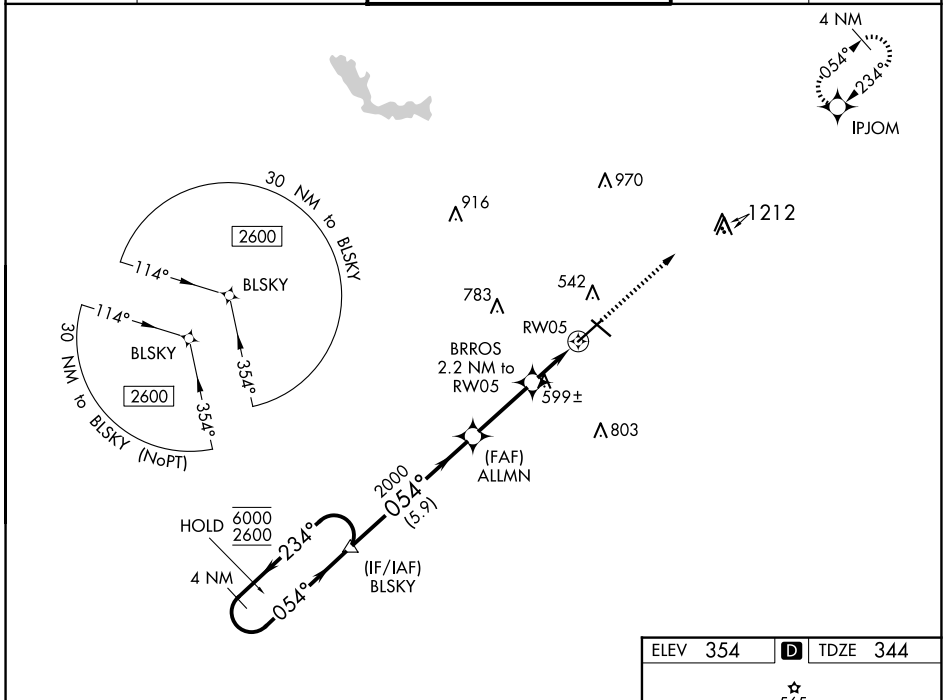

CATEGORY	A	B	C	D
LPV DA	544/24		200 (200-1/2)	
LNAV/VNAV DA	863-1 3/8		519 (600-1 3/8)	
LNAV MDA	860/24	516 (600-1/2)	860/55	516 (600-1)
CIRCLING	900-1	546 (600-1)	920-1 1/2 566 (600-1 1/2)	1120-2 1/2 766 (800-2 1/2)