

RNAV STAR RWY 19 VM 1N NASBU 1V TIBRA 1N REKNO 1N TERTU 3N MYRAR 1N INGAN 2N - ICAO

STANDARD ARRIVAL CHART -
INSTRUMENT (STAR) - ICAO

BIRK - REYKJAVIK


SCALE 1:750.000
AD ELEV 45

TRANSITION
ALTITUDE 7000

APP 119.000	TWR/AFIS 118.000
GND 121.700	ATIS 128.100

RNAV STAR RWY 19
VM 1N, NASBU 1V, TIBRA 1N
REKNO 1N, TERTU 3N, MYRAR 1N, INGAN 2N

CHANGES: RH NDB REPLACED WITH REKNO, STAR NAME RH 3N CHANGED TO REKNO 1N

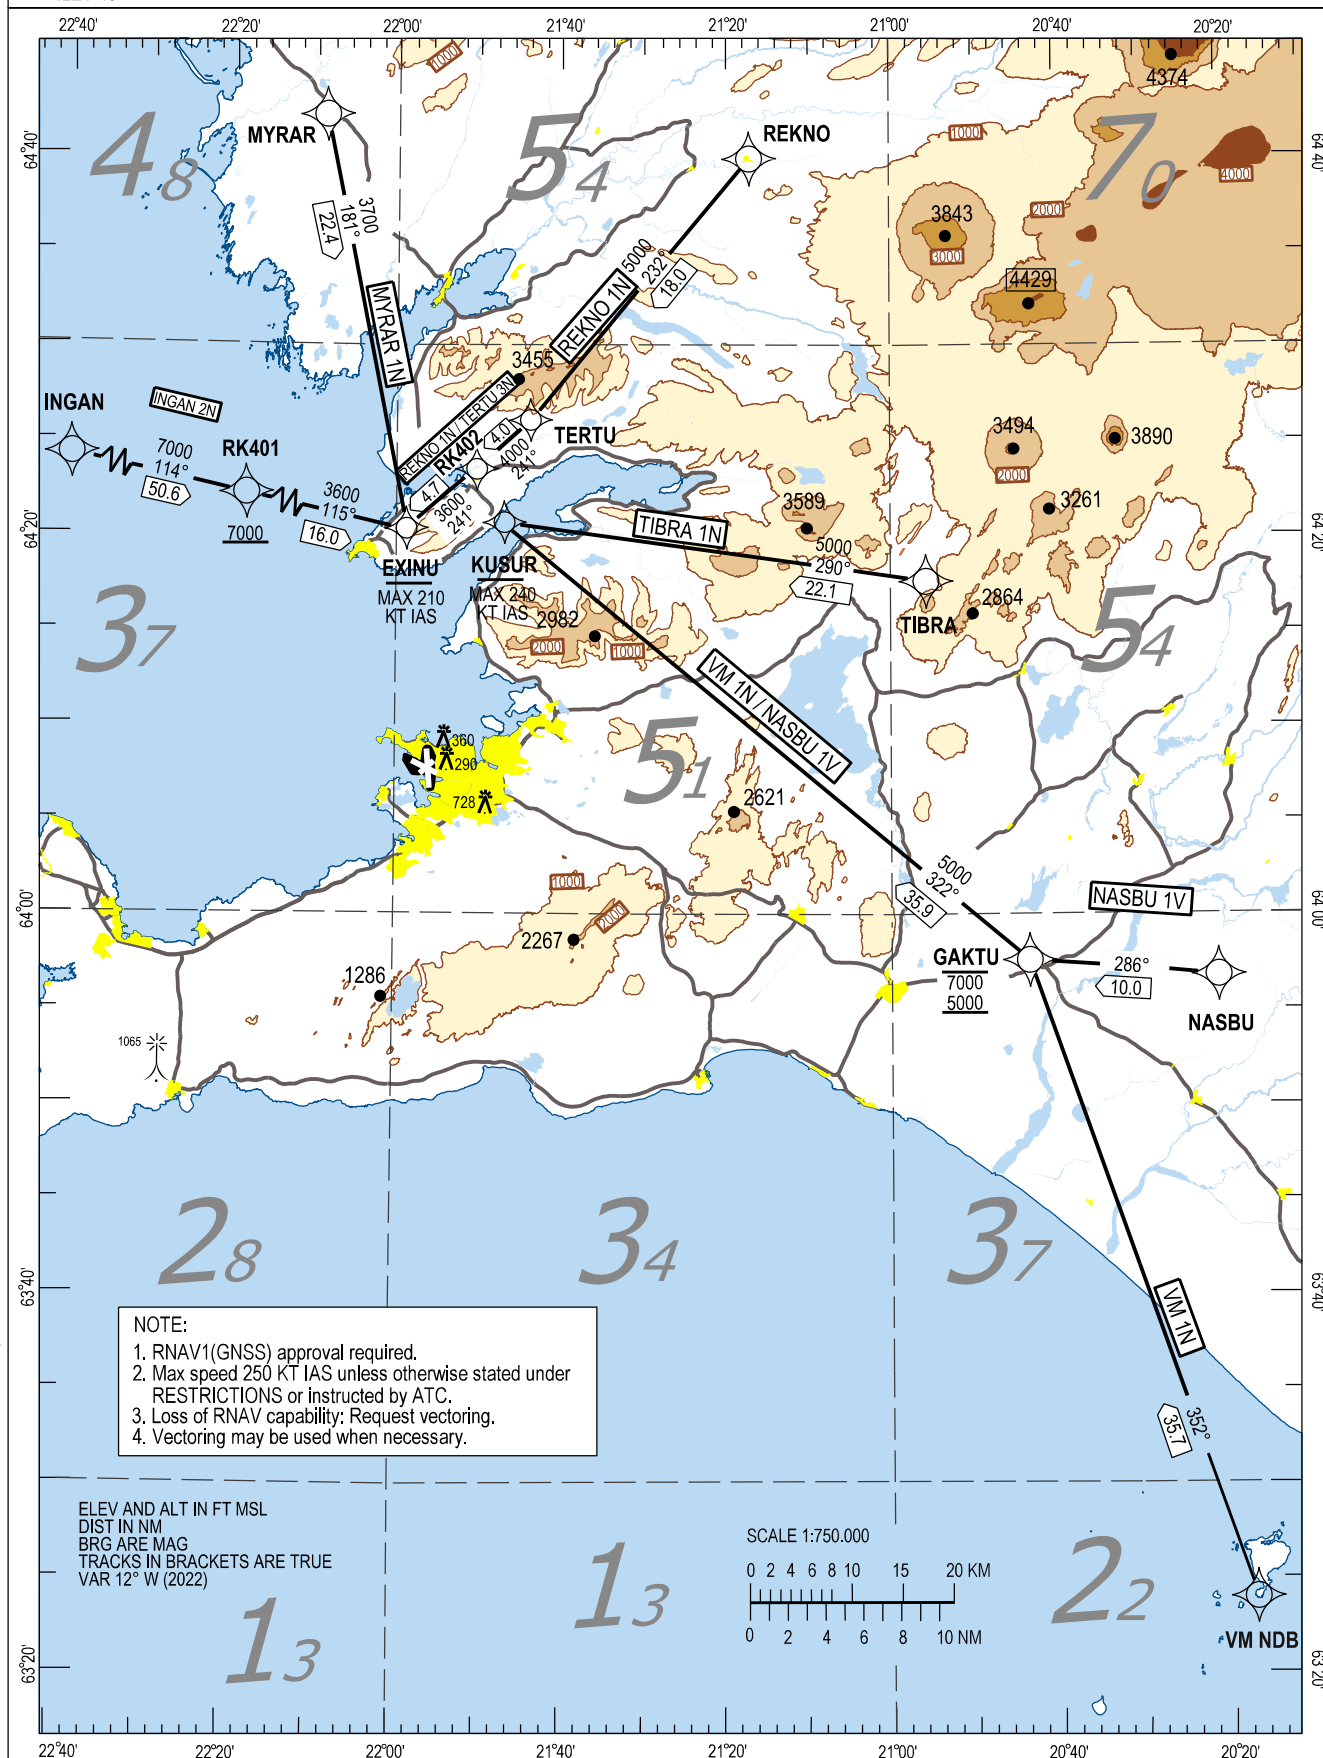

BIRK RNAV STAR RWY 19 - Recommended Coding Tables

VM 1N

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course / Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (ft)	Speed (kt/h)	Navigation Specification
010	IF	VM (NDB)			+ 11.2			A7000+		RNAV 1 (GNSS)
020	TF	GAKTU	-	352 (341.1)	+ 11.7	35.7		A7000- A5000+		RNAV 1 (GNSS)
030	TF	KUSUR	-	322 (310.7)	+12.4	35.9		A5000+	-240	RNAV 1 (GNSS)

NASBU 1V

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course / Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (ft)	Speed (kt/h)	Navigation Specification
010	IF	NASBU			+ 11.5			A6900+		RNAV 1 (GNSS)
020	TF	GAKTU	-	286 (274.8)	+ 11.6	10.0		A7000- A5000+		RNAV 1 (GNSS)
030	TF	KUSUR	-	322 (310.7)	+12.4	35.9		A5000+	-240	RNAV 1 (GNSS)

TIBRA 1N

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course / Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (ft)	Speed (kt/h)	Navigation Specification
010	IF	TIBRA			+ 11.9			A6000+		RNAV 1 (GNSS)
020	TF	KUSUR	-	290 (278.6)	+ 12.4	22.1		A5000+	-240	RNAV 1 (GNSS)

REKNO 1N

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course / Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (ft)	Speed (kt/h)	Navigation Specification
010	IF	REKNO			+ 12.2			A5200+		RNAV 1 (GNSS)
020	TF	TERTU	-	232 (219.8)	+ 12.4	18.0		A5000+		RNAV 1 (GNSS)
030	TF	RK402	-	241 (228.3)	+ 12.4	4.0		A4000+		RNAV 1 (GNSS)
040	TF	EXINU	-	241 (228.3)	+ 12.5	4.7		A3600+	-210	RNAV 1 (GNSS)

TERTU 3N

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course / Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (ft)	Speed (kt/h)	Navigation Specification
010	IF	TERTU			+ 12.4			A5000+		RNAV 1 (GNSS)
020	TF	RK402	-	241 (228.3)	+ 12.4	4.0		A4000+		RNAV 1 (GNSS)
030	TF	EXINU	-	241 (228.3)	+ 12.5	4.7		A3600+	-210	RNAV 1 (GNSS)

MYRAR 1N

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course / Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (ft)	Speed (kt/h)	Navigation Specification
010	IF	MYRAR			+ 12.7			A5000+		RNAV 1 (GNSS)
020	TF	EXINU	-	181 (168.5)	+ 12.5	22.4		A3700+	-210	RNAV 1 (GNSS)

INGAN 2N

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course / Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (ft)	Speed (kt/h)	Navigation Specification
010	IF	INGAN			+ 13.9			A7000+		RNAV 1 (GNSS)
020	TF	RK401	-	114 (100.6)	+ 12.8	50.6		A7000+		RNAV 1 (GNSS)
030	TF	EXINU	-	115 (102.3)	+ 12.5	16.0		A3600+	-210	RNAV 1 (GNSS)