


STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY34R/34L

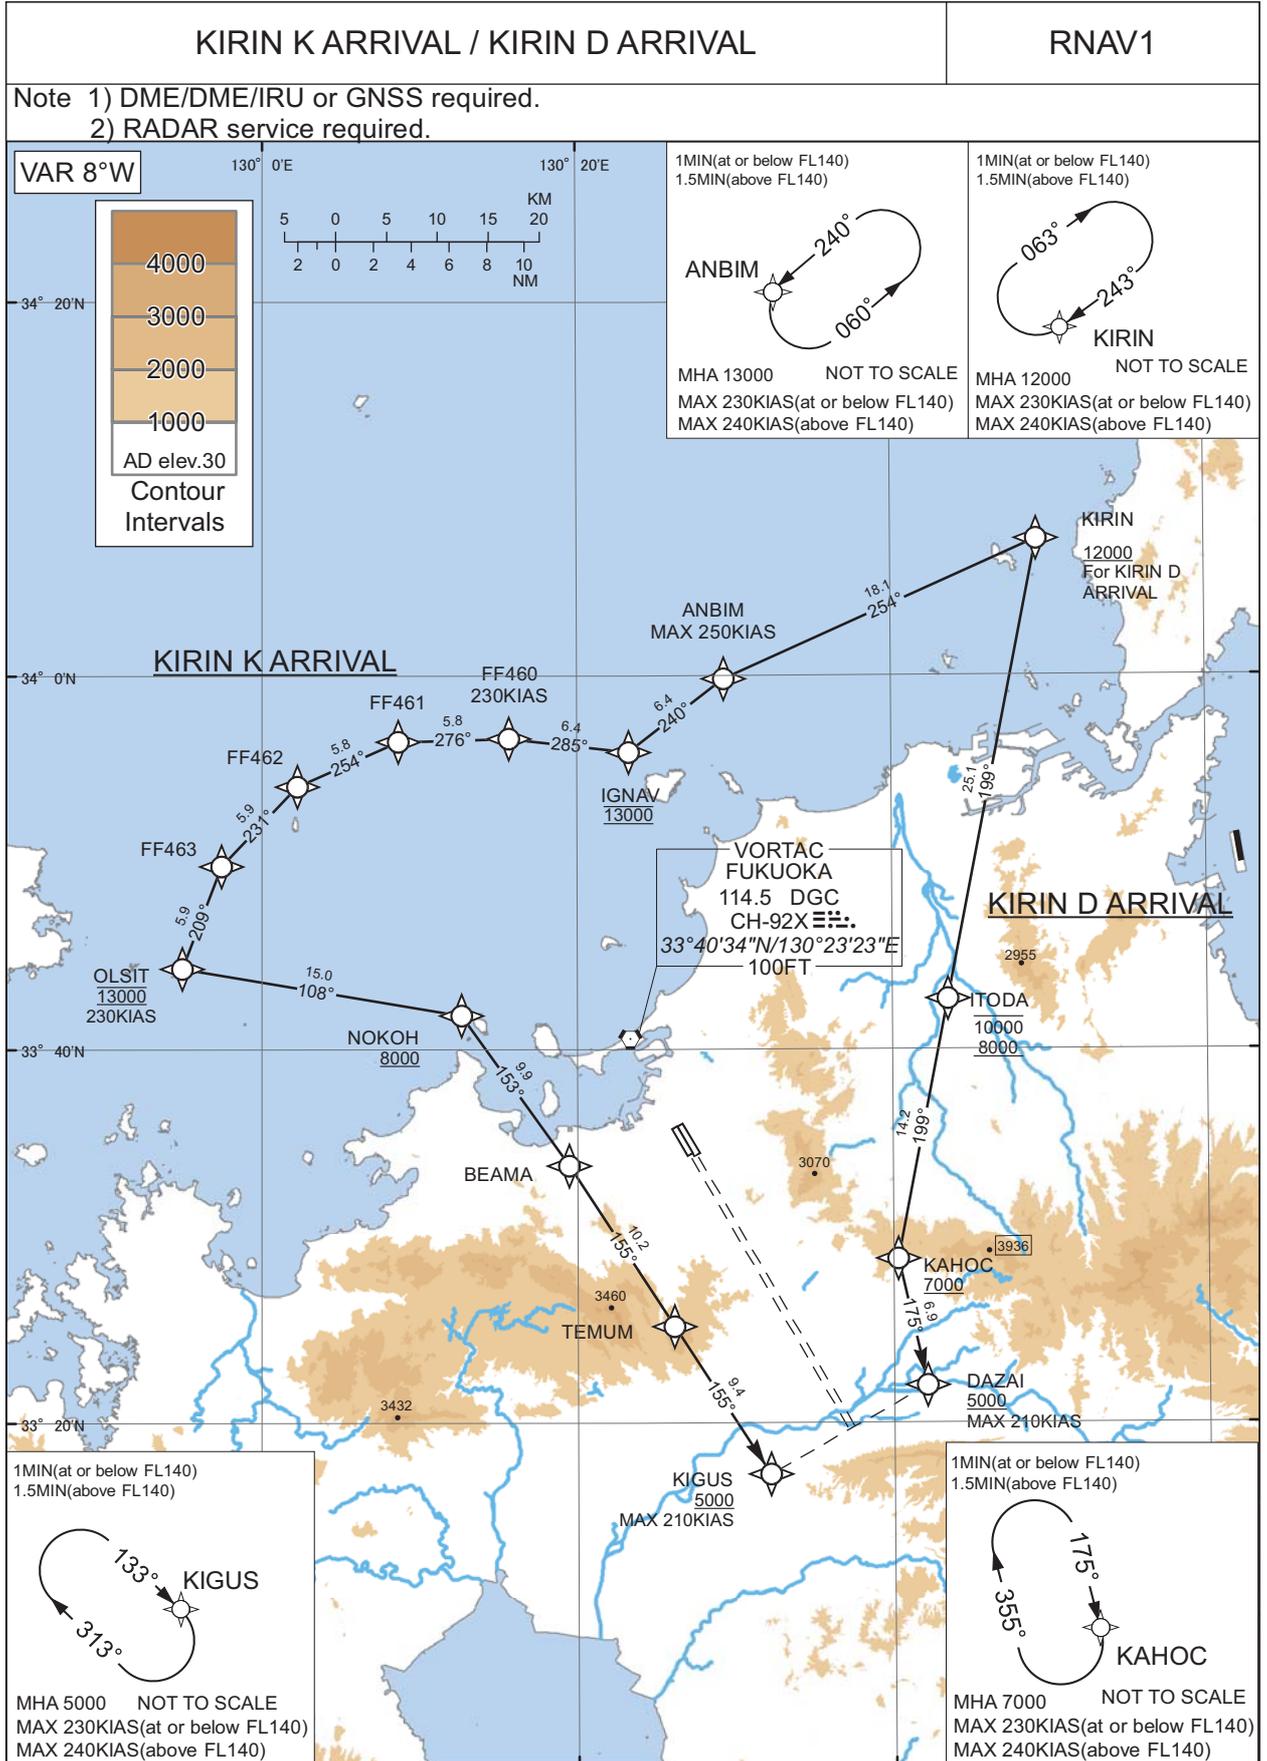

STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY34R/34L

KIRIN K ARRIVAL

From KIRIN, to ANBIM, to IGNAV at 13000FT, to FF460, to FF461, to FF462, to FF463, to OLSIT at 13000FT, to NOKOH at or above 8000FT, to BEAMA, to TEMUM, to KIGUS at or above 5000FT.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KIRIN	-	-	-8.0	-	-	-	-	-	RNAV1
002	TF	ANBIM	-	254 (245.8)	-8.0	18.1	-	-	-250	-	RNAV1
003	TF	IGNAV	-	240 (232.0)	-8.0	6.4	-	13000	-	-	RNAV1
004	TF	FF460	-	285 (276.7)	-8.0	6.4	-	-	230	-	RNAV1
005	TF	FF461	-	276 (268.4)	-8.0	5.8	-	-	-	-	RNAV1
006	TF	FF462	-	254 (245.8)	-8.0	5.8	-	-	-	-	RNAV1
007	TF	FF463	-	231 (223.2)	-8.0	5.9	-	-	-	-	RNAV1
008	TF	OLSIT	-	209 (200.7)	-8.0	5.9	-	13000	230	-	RNAV1
009	TF	NOKOH	-	108 (099.5)	-8.0	15.0	-	+8000	-	-	RNAV1
010	TF	BEAMA	-	153 (144.8)	-8.0	9.9	-	-	-	-	RNAV1
011	TF	TEMUM	-	155 (147.2)	-8.0	10.2	-	-	-	-	RNAV1
012	TF	KIGUS	-	155 (147.3)	-8.0	9.4	-	+5000	-210	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	KIRIN	243 (235.1)	-8.0	1.0 (-14000) 1.5 (+14001)	R	12000	-	-230 (-14000) -240 (+14001)	RNAV1
Hold	ANBIM	240 (232.1)	-8.0	1.0 (-14000) 1.5 (+14001)	L	13000	-	-230 (-14000) -240 (+14001)	RNAV1
Hold	KIGUS	133 (125.2)	-8.0	1.0 (-14000) 1.5 (+14001)	R	5000	-	-230 (-14000) -240 (+14001)	RNAV1

CHANGE : New PROC.

STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY34R/34L

KIRIN D ARRIVAL

From KIRIN at or above 12000FT, to ITODA between 10000FT and 8000FT, to KAHOC at or above 7000FT, to DAZAI at or above 5000FT.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KIRIN	-	-	-8.0	-	-	+12000	-	-	RNAV1
002	TF	ITODA	-	199 (191.0)	-8.0	25.1	-	-10000 +8000	-	-	RNAV1
003	TF	KAHOC	-	199 (191.0)	-8.0	14.2	-	+7000	-	-	RNAV1
004	TF	DAZAI	-	175 (167.3)	-8.0	6.9	-	+5000	-210	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	KIRIN	243 (235.1)	-8.0	1.0 (-14000) 1.5 (+14001)	R	12000	-	-230 (-14000) -240 (+14001)	RNAV1
Hold	KAHOC	175 (167.3)	-8.0	1.0 (-14000) 1.5 (+14001)	R	7000	-	-230 (-14000) -240 (+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates
KIRIN	340717.9N / 1304919.3E
ANBIM	335949.6N / 1302922.5E
IGNAV	335554.0N / 1302319.1E
FF460	335638.5N / 1301541.9E
FF461	335628.8N / 1300839.8E
FF462	335404.9N / 1300214.7E
FF463	334948.8N / 1295725.3E
OLSIT	334419.7N / 1295455.9E
NOKOH	334149.5N / 1301240.1E
BEAMA	333346.7N / 1301928.8E
TEMUM	332509.9N / 1302607.4E
KIGUS	331715.7N / 1303211.9E
ITODA	334242.2N / 1304333.1E
KAHOC	332847.4N / 1304018.8E
DAZAI	332200.9N / 1304208.1E

CHANGE : New PROC.