

|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>49013</b><br><b>W20D</b> | APP CRS<br><b>201°</b> | Rwy Idg<br>TDZE <b>551</b><br>Apt Elev <b>599</b> |
|----------------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) Y RWY 20L

NASHVILLE INTL (BNA)



⚠

For uncompensated Baro-VNAV systems, procedure NA below -11°C (13°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Simultaneous approach authorized with Rwy 20R. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inop MALSR, increase LNAV/VNAV all Cats visibility to 1%. \*\* RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH:  
Climb to 1300 then climbing left turn to 4000 direct CENOP and hold.

|                        |                                         |                                       |                               |                           |       |
|------------------------|-----------------------------------------|---------------------------------------|-------------------------------|---------------------------|-------|
| D-ATIS<br><b>135.1</b> | NASHVILLE APP CON<br><b>118.4 360.7</b> | NASHVILLE TOWER<br><b>118.6 257.8</b> | GND CON<br><b>121.9 348.6</b> | CLNC DEL<br><b>126.05</b> | CPDLC |
|------------------------|-----------------------------------------|---------------------------------------|-------------------------------|---------------------------|-------|

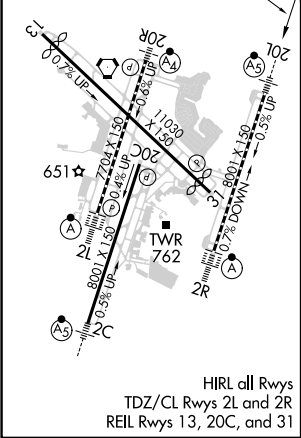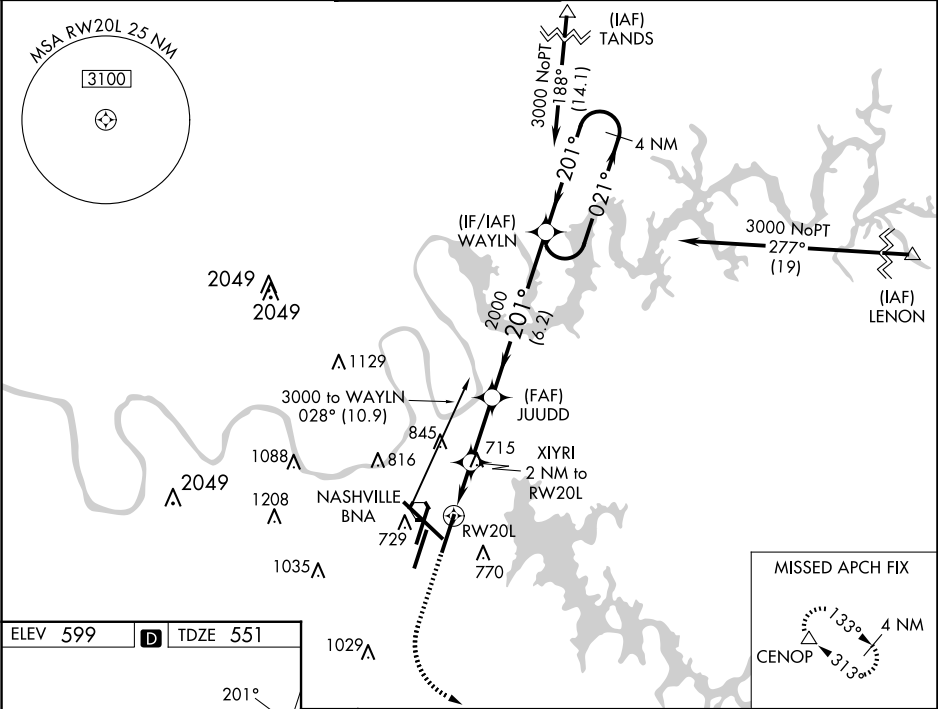

|                             |                       |                       |                         |  |                         |   |
|-----------------------------|-----------------------|-----------------------|-------------------------|--|-------------------------|---|
| 1300<br>↑                   | 4000<br>↖             | CENOP<br>△            |                         |  |                         |   |
| *LNAV only.                 |                       |                       |                         |  |                         |   |
| *1.2 NM to RW20L            |                       |                       |                         |  |                         |   |
| 2 NM to RW20L               |                       |                       |                         |  |                         |   |
| JUDD 2000                   |                       |                       |                         |  |                         |   |
| 201°                        |                       |                       |                         |  |                         |   |
| 021° → 3000                 |                       |                       |                         |  |                         |   |
| ← 201°                      |                       |                       |                         |  |                         |   |
| GP 3.00° TCH 47             |                       |                       |                         |  |                         |   |
| 1.2 NM 0.8 NM 2.4 NM 6.2 NM |                       |                       |                         |  |                         |   |
| CATEGORY                    | A                     |                       | B                       |  | C                       | D |
| LPV DA                      | ** 751/24 200 (200-½) |                       |                         |  |                         |   |
| LNAV/VNAV DA                | 1025/58 474 (500-1¼)  |                       |                         |  |                         |   |
| LNAV MDA                    | 980/24 429 (400-½)    |                       | 980/40 429 (400-¾)      |  |                         |   |
| CIRCLING                    | 1100-1<br>501 (600-1) | 1120-1<br>521 (600-1) | 1200-1¾<br>601 (700-1¾) |  | 1380-2½<br>781 (800-2½) |   |