

AERODROME CHART - ICAO

ARP
44° 06' 29.77"N
015° 20' 48.11"E

AD ELEV 289 ft
GUND 140 ft

ZADAR TOWER 123.700


ZADAR / Zemunik
CROATIA

CHANGE: Magnetic Variation, Magnetic Bearing for RWY 04/22 and RWY 13/31, RWY 13/31 Designator, Designator for MM, GP and IZD ILS-LOC; ADDED: RESA 04, RESA 22, RESA 13, RESA 31, Declared Distances, RWY Surface and Strength, APRON Surface and Strength.

MAIN APRON		
SECTION	SURFACE	STRENGTH
S1	ASPH	PCN 65/F/B/W/T
S2		PCN 93/F/B/W/T
S3		PCN 57/F/B/W/T
S4		PCN 55/F/B/X/T



GENERAL AVIATION APRON	
SURFACE	STRENGTH
ASPH	PCN 15/F/B/Y/T

TWY	WIDTH (m)	SURFACE	STRENGTH
A	15	CONC	PCN 42/R/B/W/T
B	15	CONC	PCN 44/R/B/W/T
C	10	ASPH	PCN 22/F/B/Y/T
D	10	ASPH	PCN 22/F/B/Y/T
E	15	CONC	PCN 20/R/B/W/T
F	15	CONC	PCN 36/R/B/W/T
G	27	ASPH	PCN 65/F/B/W/U
H	15	CONC	PCN 26/R/B/W/T
K	18	CONC	PCN 63/R/A/W/T
		ASPH	PCN 47/F/B/X/T
L	10.5	ASPH	PCN 15/F/B/Y/T

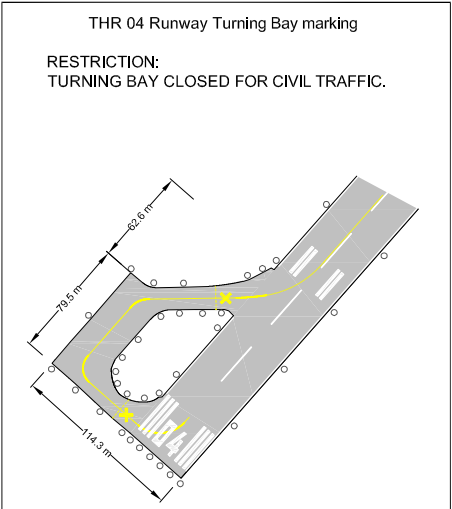

DECLARED DISTANCES				
RWY	TORA (m)	TODA (m)	ASDA (m)	LDA (m)
04	2000	2000	2000	2000
22	2000	2000	2000	2000
13	2500	2500	2500	2500
31	2500	2500	2500	2500

RWY	SURFACE	STRENGTH
THR 04	ASPH	PCN 45/F/B/X/T
THR 22		
THR 13	ASPH	PCN 44/F/B/W/T
THR 31		

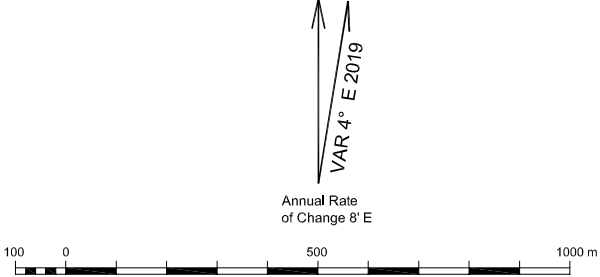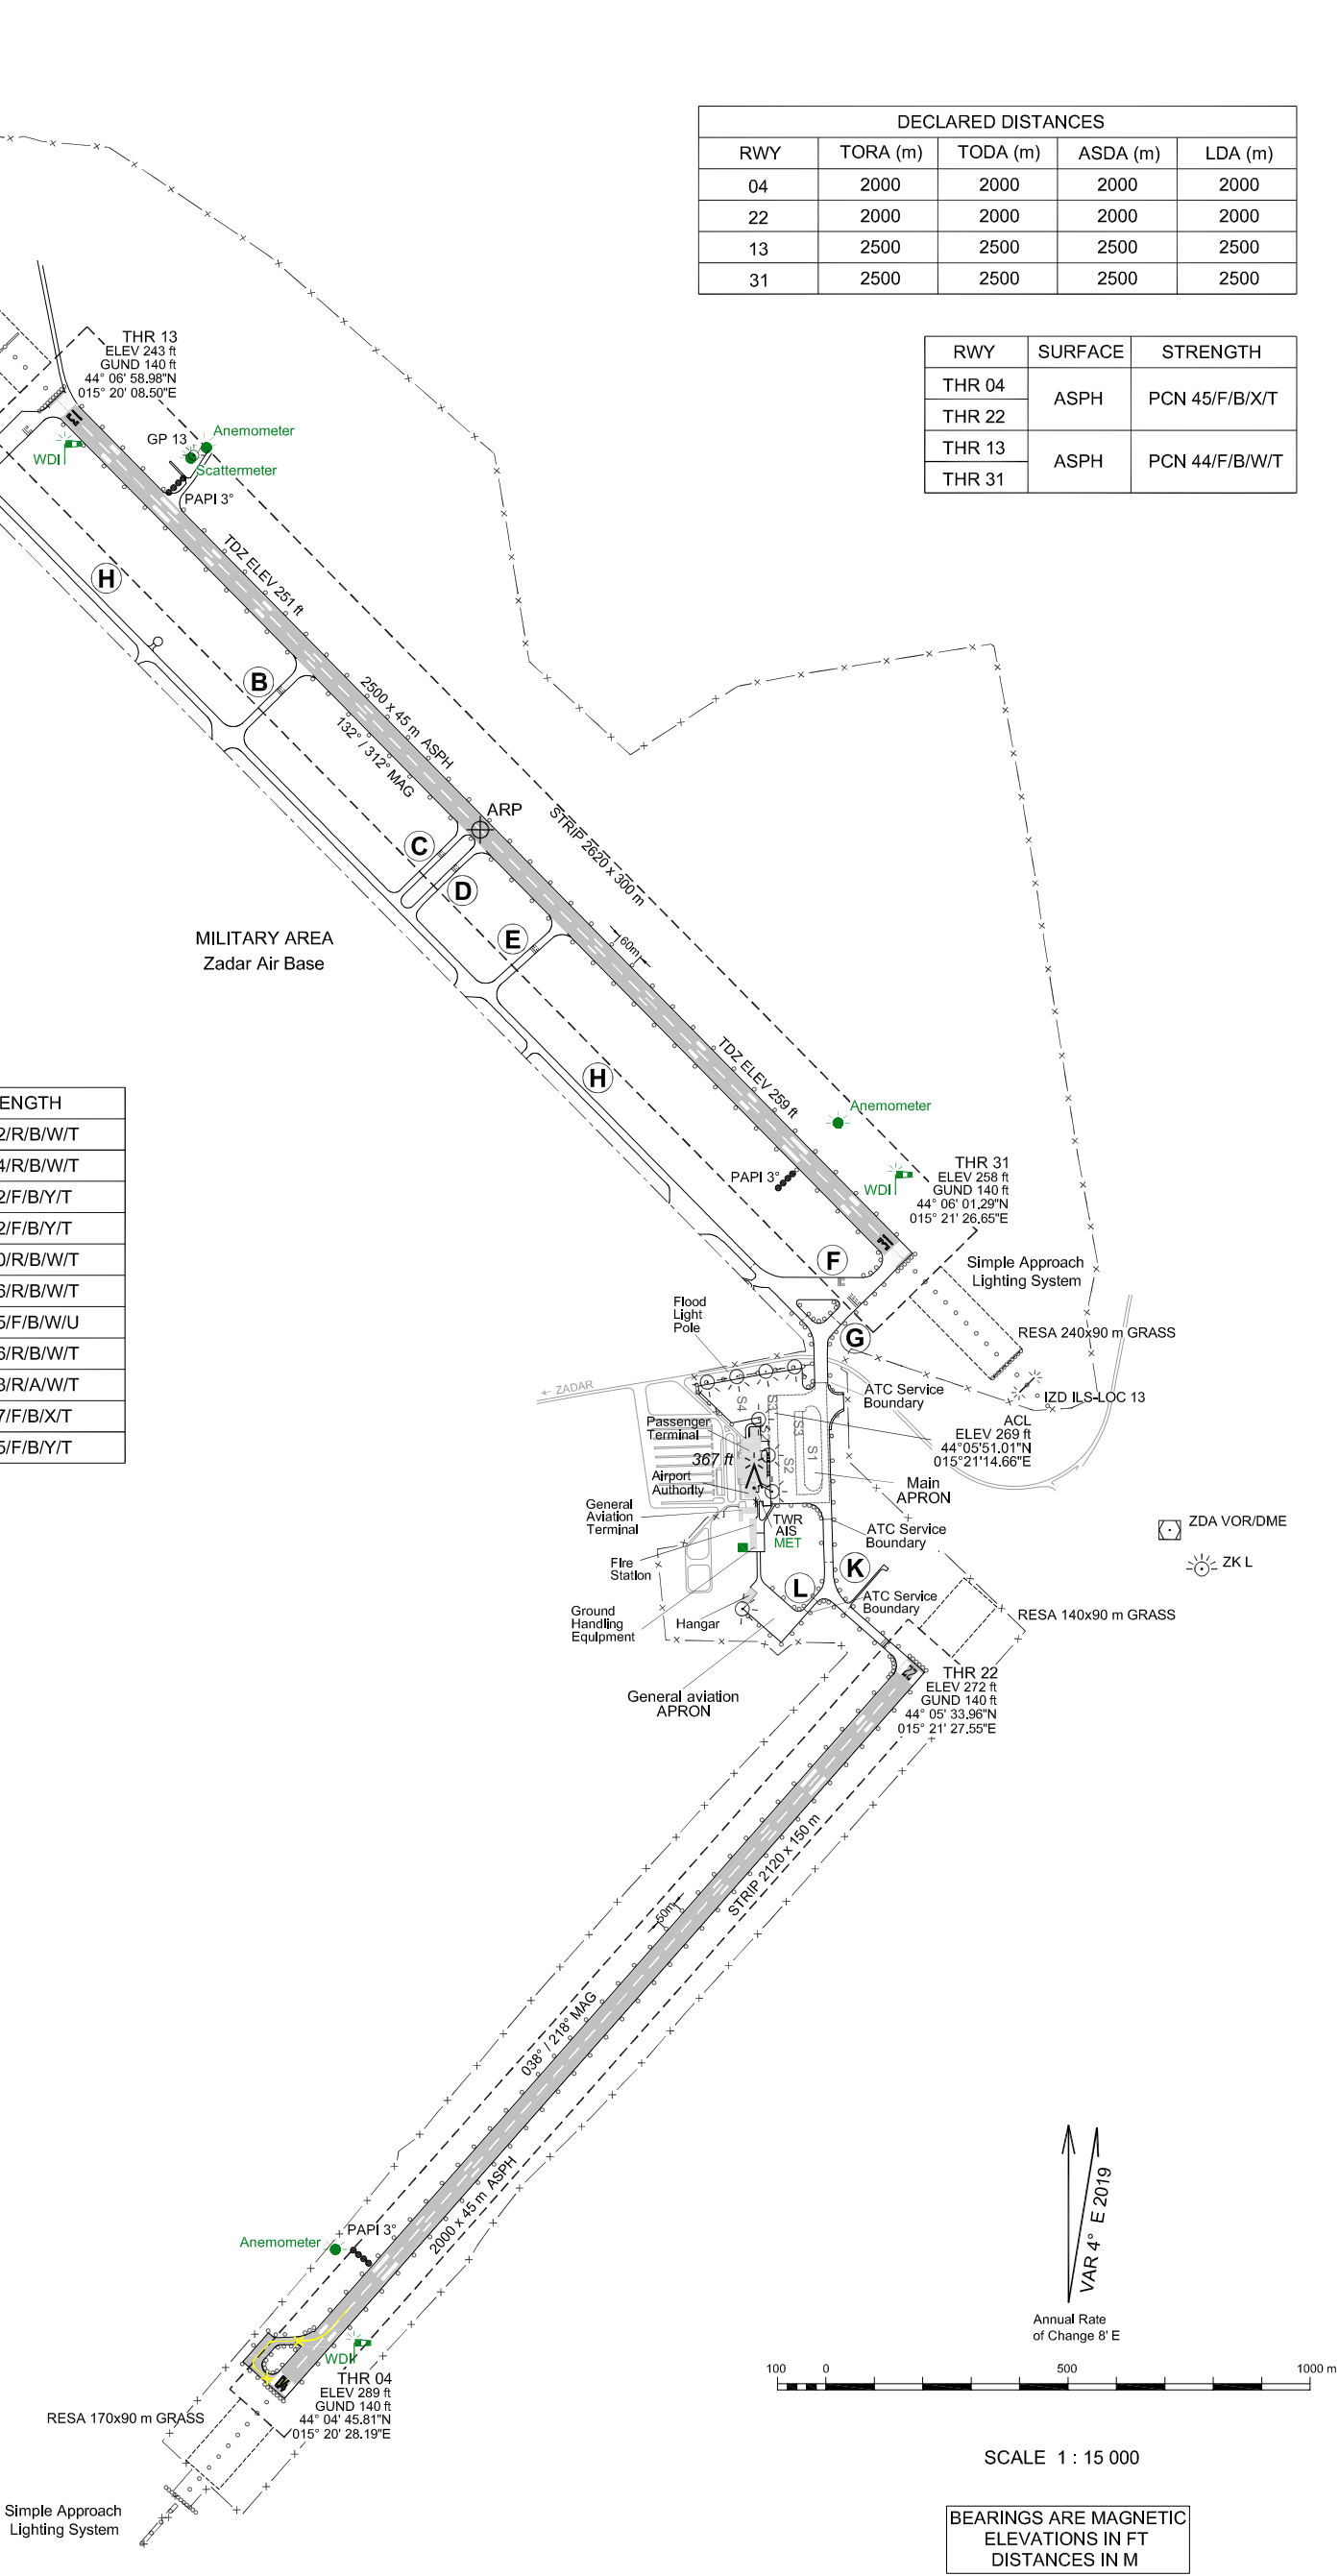

OVA STRANICA JE NAMJERNO OSTAVLJENA PRAZNA
THIS PAGE INTENTIONALLY LEFT BLANK