
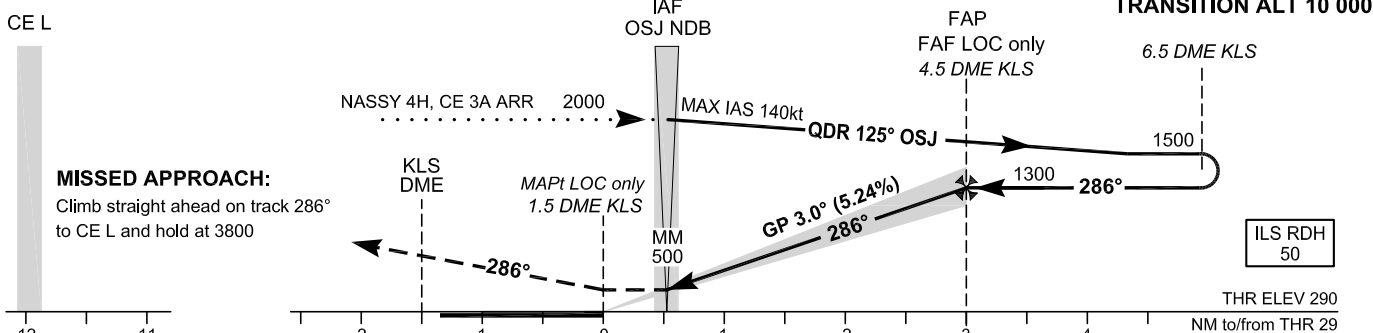


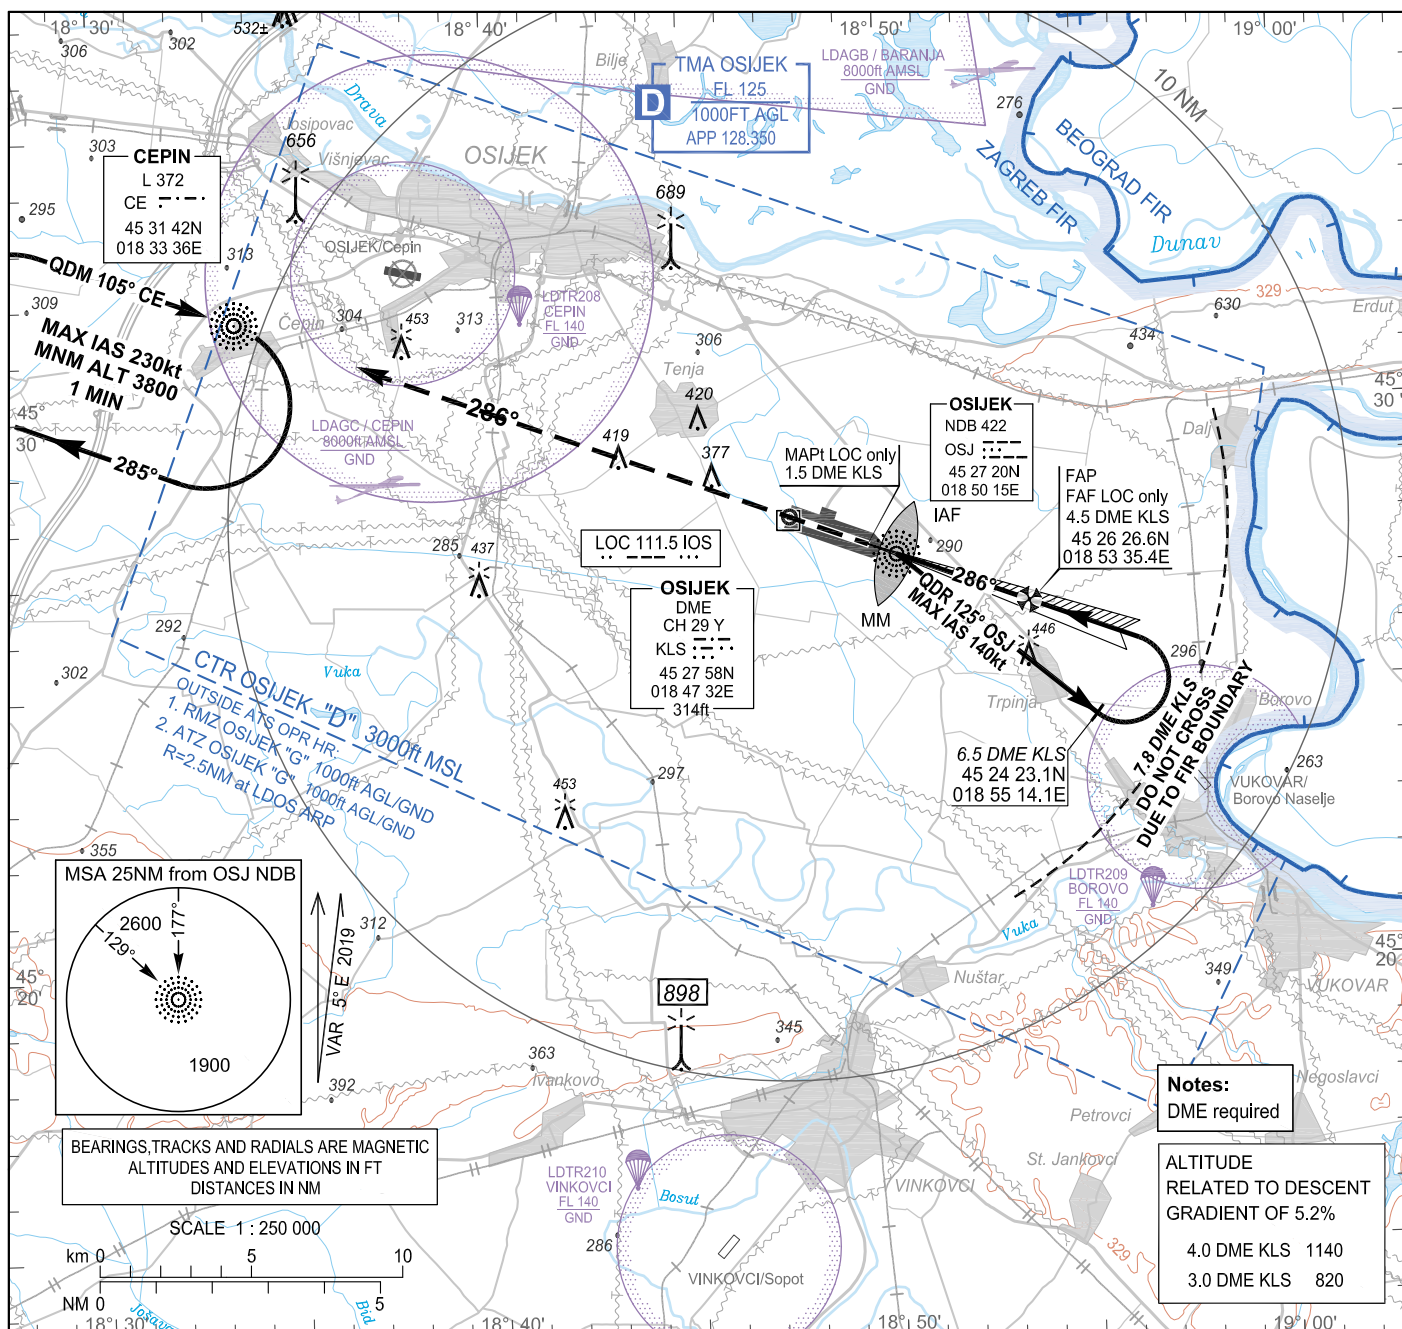

OCA(H)		A	B
Straight-in Approach	ILS CAT I press. altim.	428 (138)	438 (148)
	LOC only	620 (330)	
Circling		690 (400)	790 (500)

FAF LOC only to MAPt distance – 3.0 NM Timing not authorized for defining the MAPt							
GS(kt)	70	80	90	100	110	120	130
min:sec	2:34	2:15	2:00	1:48	1:38	1:30	1:23
Rate of descent (ft/min)	372	425	478	531	584	637	690

OSIJEK / Klisa (LDOS)

ILS x or LOC x RWY 29

ACFT CAT A & B

AERONAUTICAL DATABASE REQUIREMENTS			
Conventional procedure essential fixes/points			
ILS x or LOC x RWY 29 ACFT CAT A&B			
LOC only - final approach descent angle: 3.00°			
Fix identification	Coordinates	True bearing or ARC distance providing track	True bearing or distance providing intersection
IAF (OSJ NDB)	452719.51N 0185015.39E	-	-
FAF LOC only	452626.6N 0185335.4E	290.56° (IOS LOC)	4.53 DME KLS
MAPt LOC only (THR 29)	452730.26N 0184934.67E	290.56° (IOS LOC)	1.51 DME KLS

CHANGE: Parachuting zones added; Editorial.