

LAS VEGAS, NEVADA

HI-TACAN RWY 3R

TACAN LSV	APCH CRS	Rwy Idg	10,051
Chan 12	029°	TDZE	1833
		Arpt Elev	1869

AL-227 (USAF)

NELLIS AFB (KLSV)

RADAR required.

T * When ALS inop, increase vis to 1 3/8 miles.
** Circling NA SE of Rwy 3R-21L.

ALSF-1




MISSED APPROACH: Climb to 9000 on LSV TACAN R-031 to VETTT and hold.

ATIS
270.1

APP CON
124.95 273.

TOWER
132.55 327.0

GND CON
121.8 275.8

CLNC DEL
20.9 289.4

† **CAUTION:** Missed Approach
Minimum Climb Rate to 4500

Knots	60	120	180	240	300	360
V/V(fpm)	283	566	849	1132	1415	1698

Controlling Obstacle 4209'

MISSED APPROACH
requires use of RNAV or
ATC RADAR monitoring.

CAUTION: Large tower (1193 ft) left of course at 8.6 DME. Numerous buildings with high intensity lighting.


NOT FOR CIVIL USE

NELLIS
LSV
Chan 12

SW-4, 20 MAR 2025 to 17 APR 2025

SW-4, 20 MAR 2025 to 17 APR 2025

EMERG SAFE ALT 100 NM 14,000

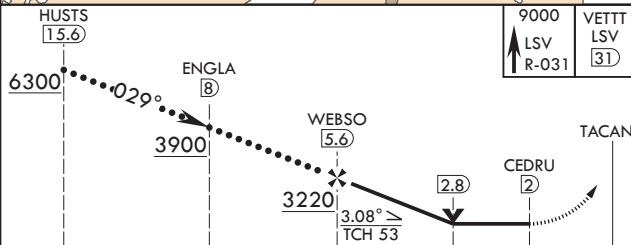


9000	VETTT
LSV	LSV
31	31

ELEV 1869		TDZE 1833
-----------	--	-----------

CATEGORY	C	D	E
S-3R	2940-3	1107	(1100-3)
C CIRCLING**	2940-3	1071 (1100-3)	3220-3 1351 (1400-3)

† BELOW MINIMA REQUIRES MISSED APPROACH CLIMB GRADIENT

S-3R*	2300/50	467	(500-1)
-------	---------	-----	---------

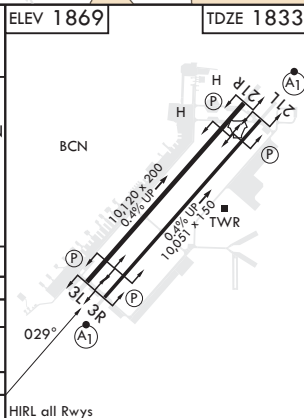

LAS VEGAS, NEVADA

36°14'N - 115°02'W

NELLIS AFB (KLSV)

HI-TACAN RWY 3R

Amdt 10 10AUG23