



INSTRUMENT APPROACH CHART

RJDB / IKI

RNP RWY20

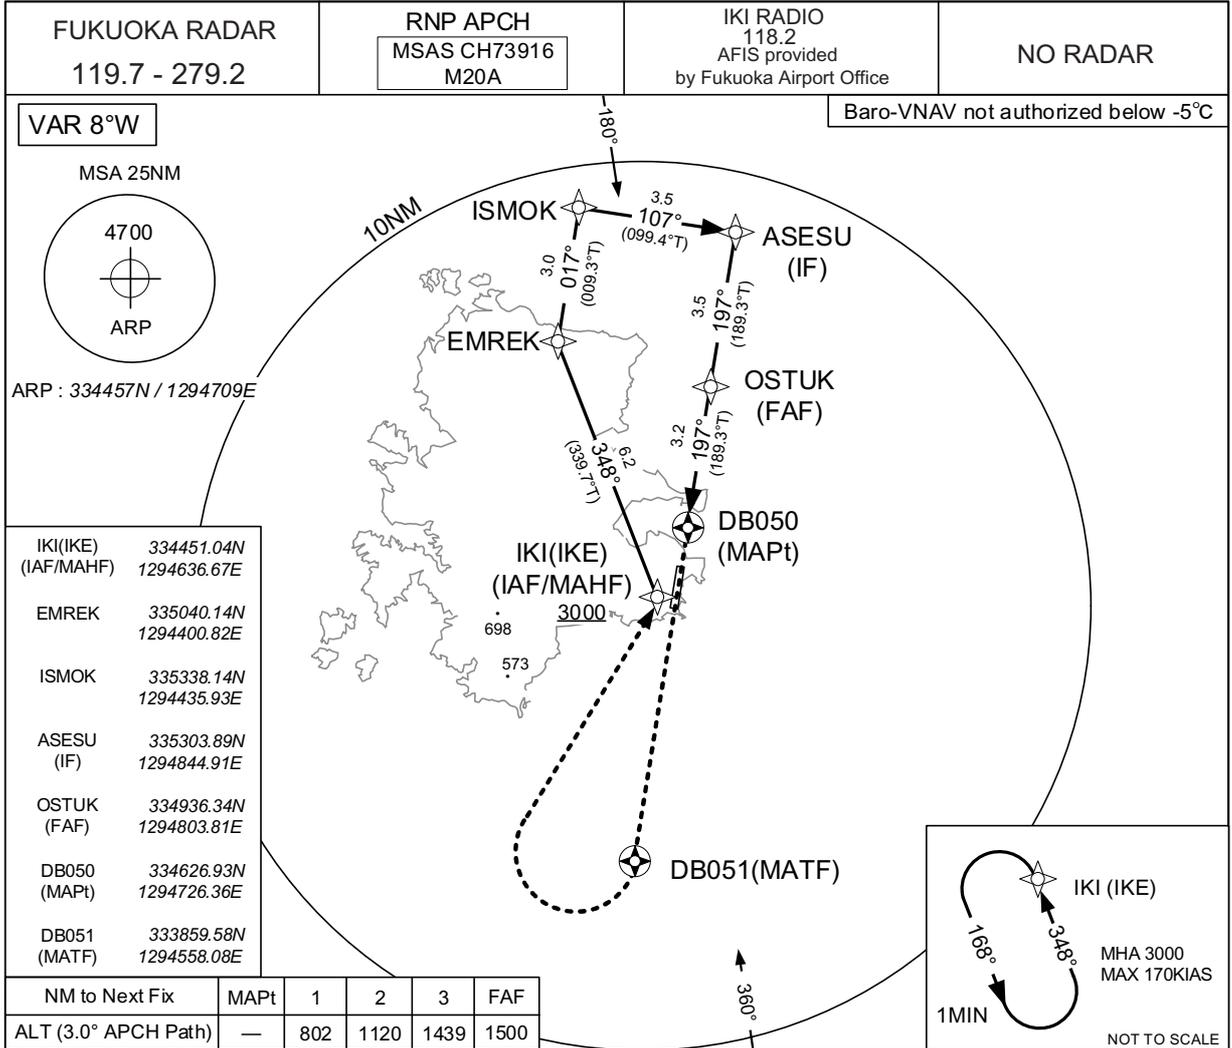

CHANGE : ALT restriction at ISMOK abolished. ALT restriction at ASESU.

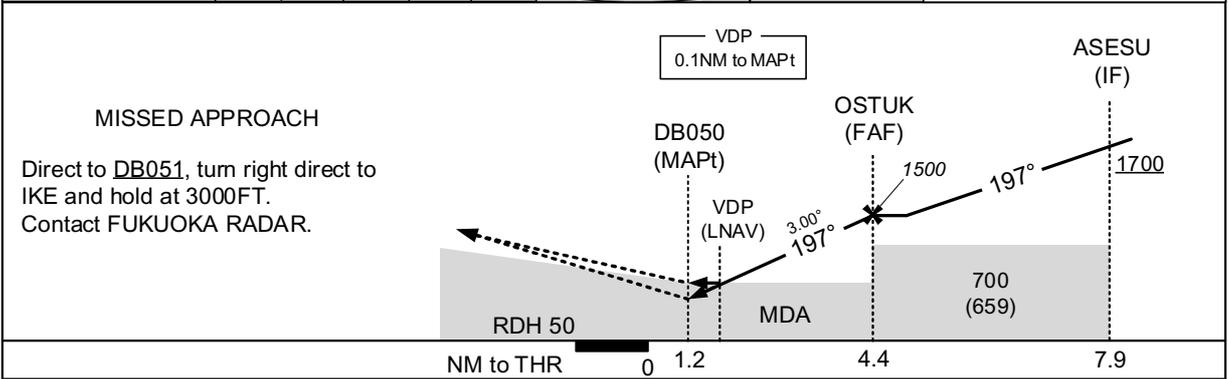

MINIMA		THR elev. 52		AD elev. 41				
CAT	LPV		LNAV/VNAV		LNAV		CIRCLING	
	DA(H)	CMV	DA(H)	CMV	MDA(H)	CMV	MDA(H)	VIS
A	458(406)	1500	500(448)	1500	500(459)	1500	660(619)	1600
B	467(415)							
C	—	—	—	—	—	—	—	—
D	—	—	—	—	—	—	—	—

INSTRUMENT APPROACH CHART

RJDB / IKI

RNP RWY20

FAS DATA BLOCK

Operation type	0	LTP/FTP ellipsoidal height	+00471
SBAS service provider identifier	2	FPAP latitude	334421.4340N
Airport identifier	RJDB	FPAP longitude	1294701.5790E
Runway	20	Threshold crossing height	00015.0
Approach performance designator	0	TCH units selector	1
Route indicator		Glide path angle	03.00
Reference path data selector	0	Course width at threshold	105.00
Reference path ID	M20A	∠ length offset	0496
LTP/FTP latitude	334515.7155N	HAL	40.0
LTP/FTP longitude	1294712.2885E	VAL	50.0
CRC remainder	660F91B2		

Required additional data

LTP/FTP orthometric height	15.6
----------------------------	------

CHANGE : Description of FAS DATA BLOCK ITEM(CRC remainder).