


INSTRUMENT
APPROACH
CHART - ICAO

RADAR
TOWER

120.400
118.100

NIZHNEVARTOVSK, RUSSIA
NIZHNEVARTOVSK
RNP RWY 21

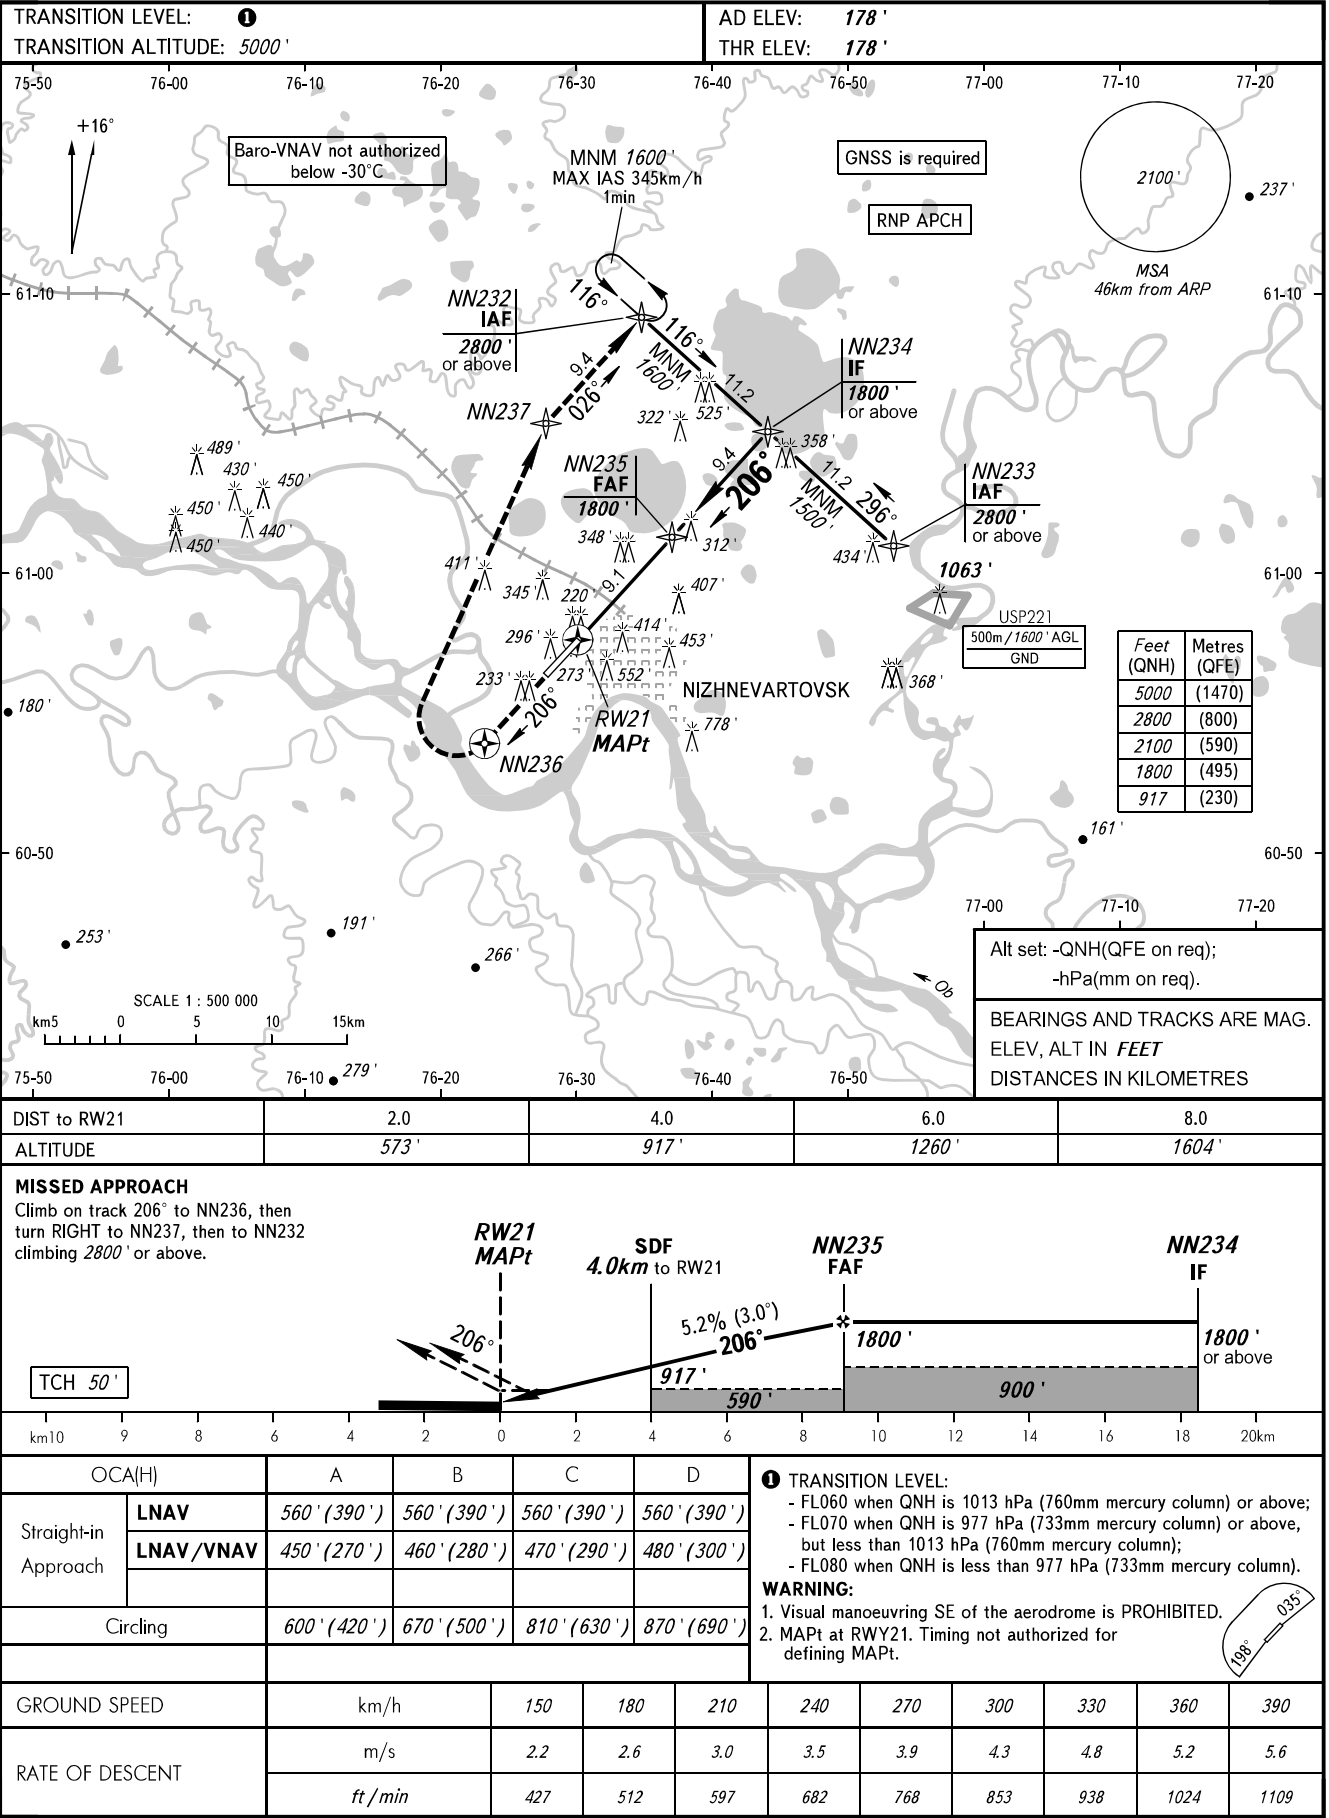

Feet (QNH)

Metres (QFE)

5000	(1470)
2800	(800)
2100	(590)
1800	(495)
917	(230)

Alt set: -QNH(QFE on req);
-hPa(mm on req).

BEARINGS AND TRACKS ARE MAG.
ELEV, ALT IN **FEET**
DISTANCES IN KILOMETRES

MISSED APPROACH

Climb on track 206° to NN236, then
turn RIGHT to NN237, then to NN232
climbing 2800' or above.

TCH 50'

RW21
MAPt

SDF
4.0km to RW21

NN235
FAF

NN234
IF

206°

5.2% (3.0°)

206°

1800'

1800' or above

590'

900'

km

10

9

8

6

4

2

0

2

4

6

8

10

12

14

16

18

20

OCA(H)	A	B	C	D
Straight-in Approach	LNAV	560' (390')	560' (390')	560' (390')
	LNAV/VNAV	450' (270')	460' (280')	470' (290')
Circling		600' (420')	670' (500')	810' (630')

① TRANSITION LEVEL:

- FL060 when QNH is 1013 hPa (760mm mercury column) or above;
- FL070 when QNH is 977 hPa (733mm mercury column) or above,
but less than 1013 hPa (760mm mercury column);
- FL080 when QNH is less than 977 hPa (733mm mercury column).

WARNING:

1. Visual manoeuvring SE of the aerodrome is PROHIBITED.
2. MAPt at RWY21. Timing not authorized for
defining MAPt.

GROUND SPEED	km/h	150	180	210	240	270	300	330	360	390
RATE OF DESCENT	m/s	2.2	2.6	3.0	3.5	3.9	4.3	4.8	5.2	5.6
	ft/min	427	512	597	682	768	853	938	1024	1109

CHANGE: TCH