

STANDARD DEPARTURE CHART - INSTRUMENT

VAR 2.7° E TWR 118.1(125.0)

ZWWW URUMQI/Diwopu
RNAV RWY 25(VARMI/EPDAG/NIXER)

BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS.
DME DISTANCES IN
NAUTICAL MILES.
DISTANCES IN KM.

APP01 120.25(119.9)
APP02 126.05(119.9)
APP03 123.8(119.9)
APP04 127.9(119.9)

TL 3600
TA 3000
3300(QNH ≥ 1031hPa)
2700(QNH ≥ 979hPa)




NOT TO SCALE

RNAV1
GNSS, RADAR REQUIRED

by ATC

Notes:

1. Under radar control service, actual flight ALT instructed by ATC.
2. When the restriction area (west and north of G-H-J-K) active, aircraft flying into the area is forbidden.
3. Restriction time followed by ATC.
4. G: N43 52.5 E087 13.1, H: N43 52.2 E087 18.9, J: N43 53.5 E087 20.8, K: N44 00.3 E087 21.5.

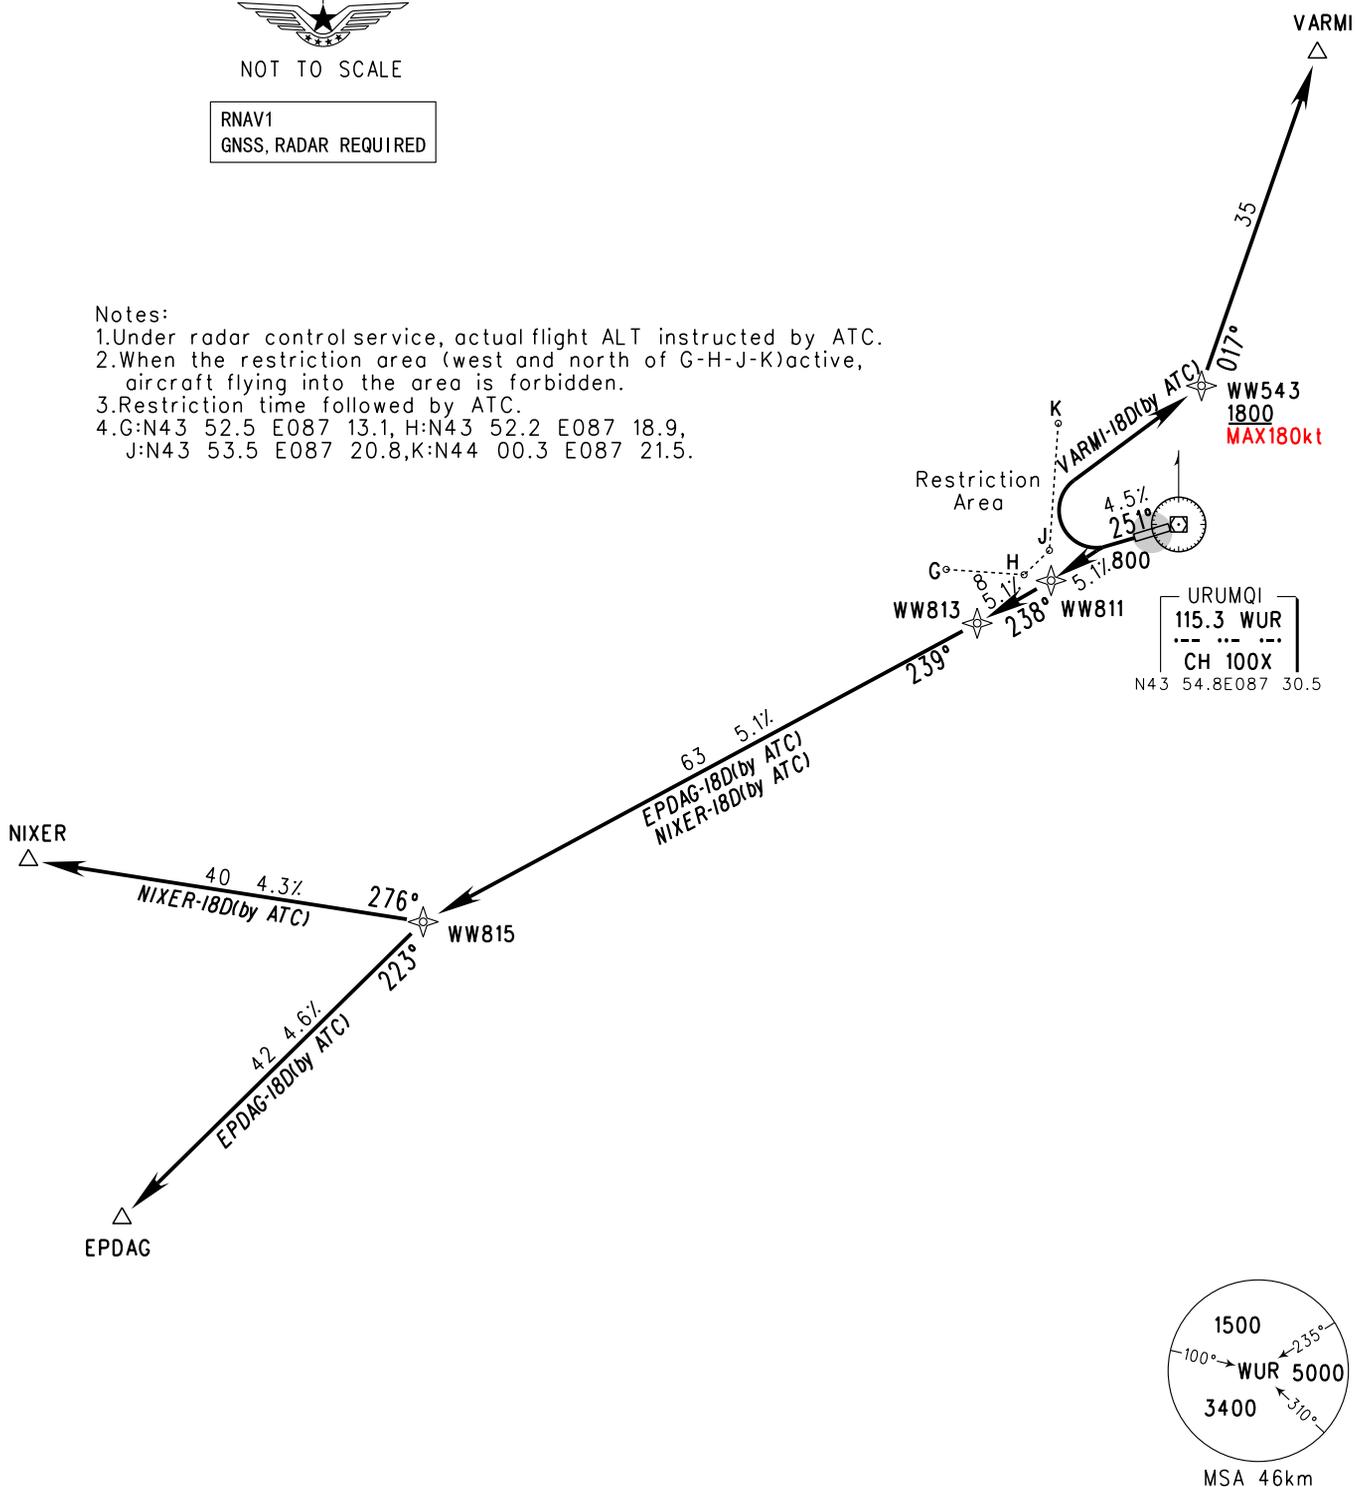

Changes: Speed limit.