


STANDARD DEPARTURE CHART -INSTRUMENT

RJGG / CHUBU CENTRAIR

RNAV SID

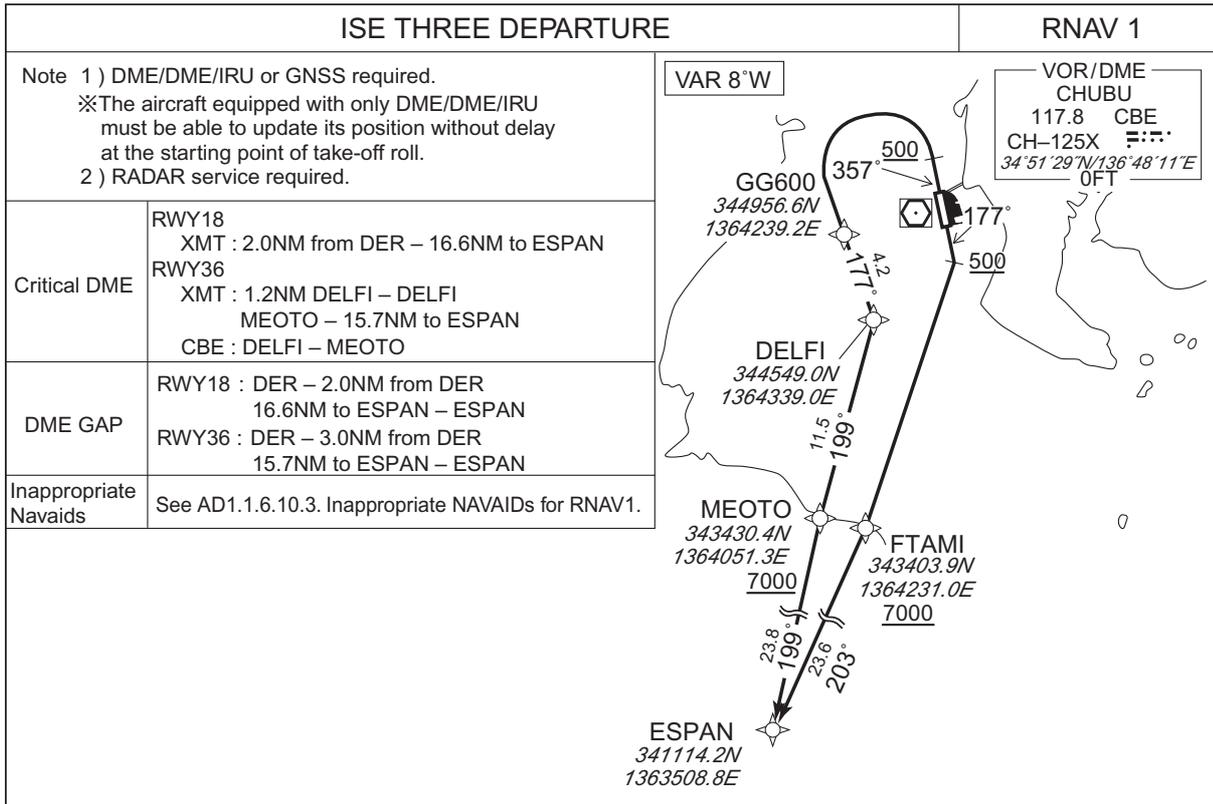

RWY18 : Climb on HDG177° at or above 500FT, turn right direct to FTAMI at or above 7000FT, to ESPAN.  
 RWY36 : Climb on HDG357° at or above 500FT, turn left direct to GG600, to DELFI, to MEOTO at or above 7000FT, to ESPAN.

CHANGE : Description of VAR and PROC name.

RWY18

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	177 (169.0)	-7.8	—	—	+500	—	—	RNAV1
002	DF	FTAMI	—	—	-7.8	—	R	+7000	—	—	RNAV1
003	TF	ESPAN	—	203 (195.0)	-7.8	23.6	—	—	—	—	RNAV1

RWY36


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	357 (349.0)	-7.8	—	—	+500	—	—	RNAV1
002	DF	GG600	—	—	-7.8	—	L	—	—	—	RNAV1
003	TF	DELFI	—	177 (168.8)	-7.8	4.2	—	—	—	—	RNAV1
004	TF	MEOTO	—	199 (191.5)	-7.8	11.5	—	+7000	—	—	RNAV1
005	TF	ESPAN	—	199 (191.5)	-7.8	23.8	—	—	—	—	RNAV1

STANDARD DEPARTURE CHART -INSTRUMENT

RJGG / CHUBU CENTRAIR RNAV TRANSITION

KOZA TRANSITION	RNAV 1
Note 1) DME/DME/IRU or GNSS required. 2) RADAR service required.	Critical DME      KEC : 13NM to KEC – 6NM to KEC
	DME GAP            3.0NM to KEC – KEC
	Inappropriate Nav aids      See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1.

VAR 8°W

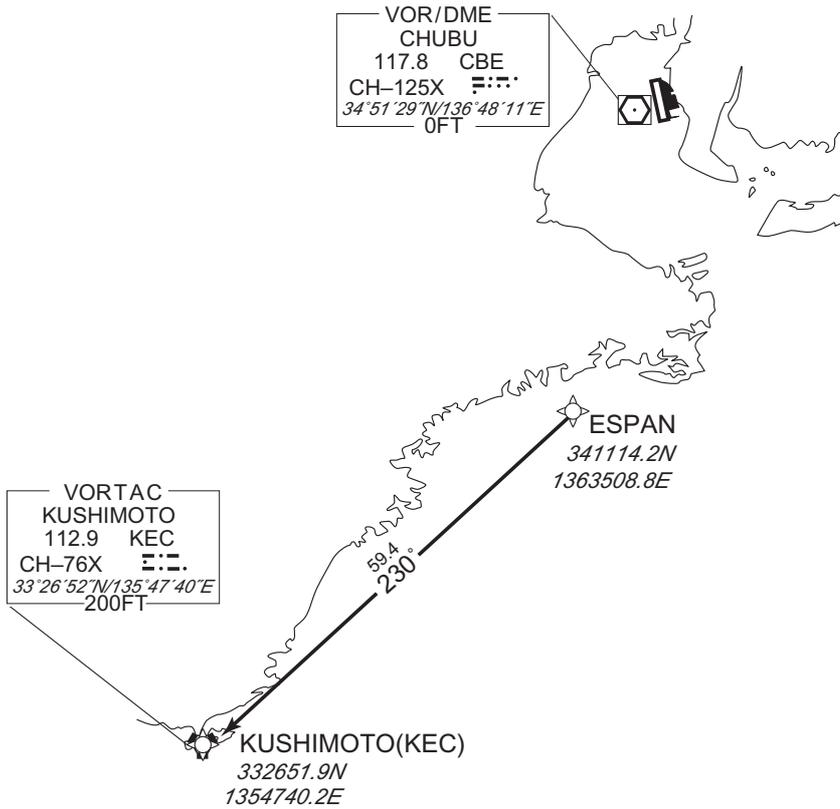

CHANGE : Description of VAR and PROC name.

From ESPAN, to KEC.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M('T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ESPAN	—	—	-7.8	—	—	—	—	—	RNAV1
002	TF	KEC	—	230 (221.9)	-7.8	59.4	—	—	—	—	RNAV1