

FUNNL THREE DEPARTURE (RNAV)

SC-1, 20 MAR 2025 to 17 APR 2025

**TOP ALTITUDE:
Assigned by ATC**



NOTE: RADAR required.

NOTE: DME/DME/IRU or GPS required.


NOTE: RNAV 1.

TAKEOFF MINIMUMS:

Rwys 13, 17L/R, 18, 31, 35L/R, 36:

Standard with minimum climb of 500' per NM to 1800.

D-ATIS
125.85
CINC DEL
124.35
GND CON
121.9 348.6
ROGERS TOWER
119.35 269.45
OKE CITY DEP CON
124.2 336.4



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 13: Climb heading 131° to 1800, then right turn heading 176° or as assigned by ATC, expect RADAR vectors to VOWED, thence


TAKEOFF RWYS 17L/R, 18: Climb heading 176° to 1800, then heading 176° or as assigned by ATC, expect RADAR vectors to VOWED, thence

TAKEOFF RWY 31: Climb heading 311° to 1800, then right turn heading 011° or as assigned by ATC, expect RADAR vectors to VOWED, thence

TAKEOFF RWYS 35L/R, 36: Climb heading 356° to 1800, then right turn heading 011° or as assigned by ATC, expect RADAR vectors to VOWED, thence

. . . . on track 080° to FUNNL, then on (transition). Maintain 5000 or as assigned by ATC. Expect filed altitude 10 minutes after departure.

PHARA TRANSITION (FUNNL3.PHARA):

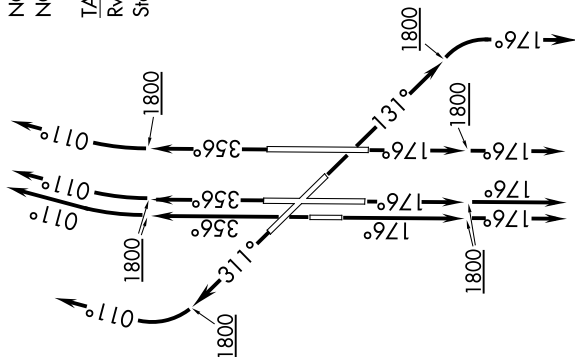

NOTE: Chart not to scale.

FUNNL THREE DEPARTURE (RNAV)

SC-1, 20 MAR 2025 to 17 APR 2025