INSTRUMENT APPROACH CHART

RJFF / FUKUOKA — TACAN RWY16L

FUKUOKA APP	FUKUOKA VORTAC	FUKUOKA TOWER	RADAR AVBL
119.65 - 121.125 - 127.9 261.2 - 270.8	114.5 DGC CH–92X 33˚40´34˚N / 130˚23´23˚E	118.4 - 118.25 - 126.2 236.8	ATIS 127.2

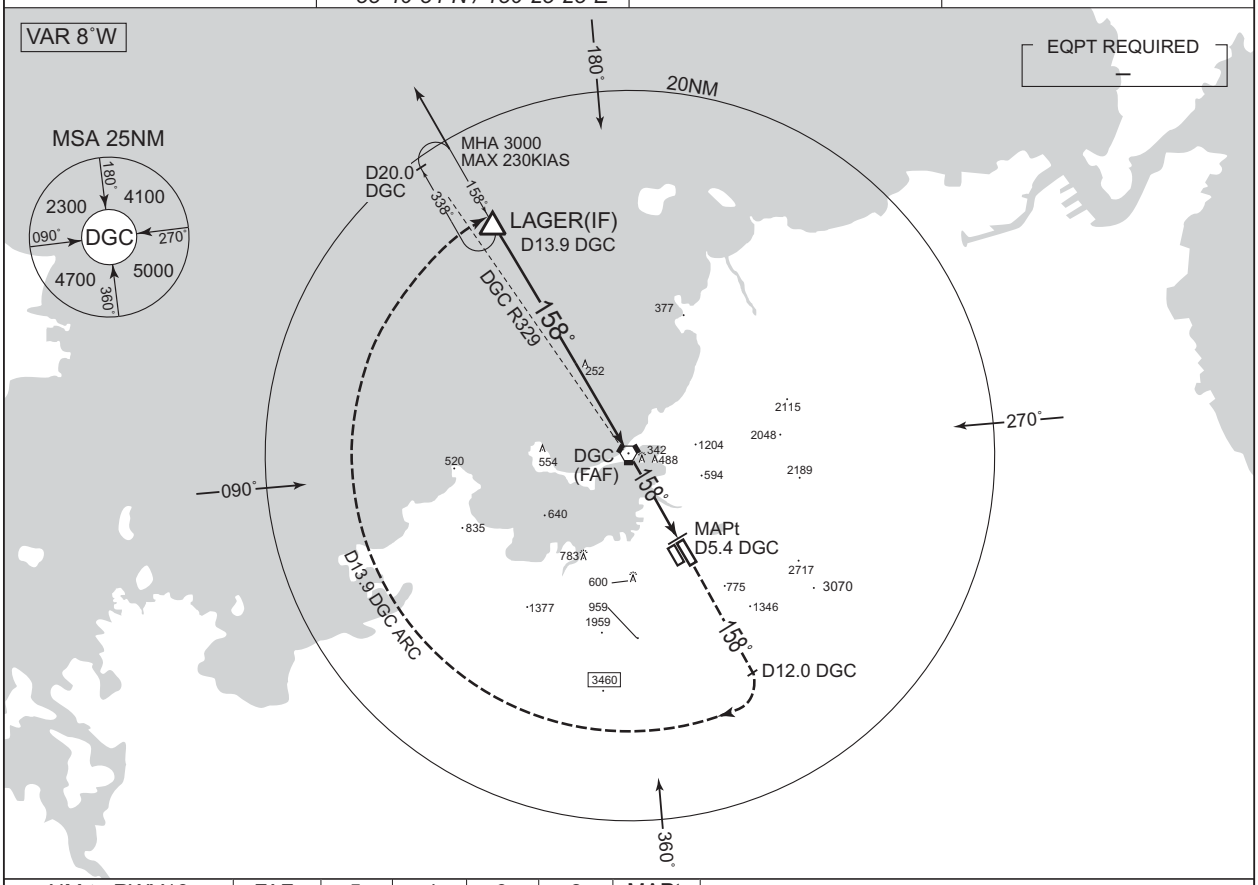

NM to RWY16	FAF	5	4	3	2	MAPt
ALT(3.0˚ APCH Path)	1750	1656	1338	1019	701	–

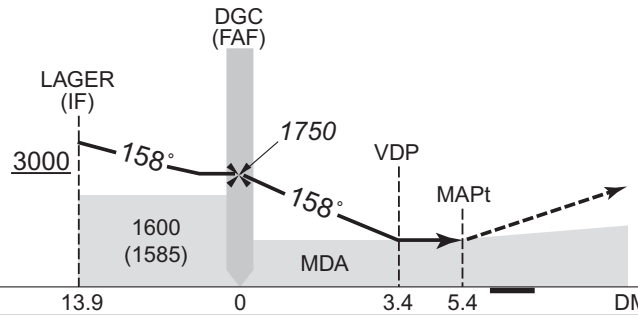

MISSED APPROACH
Climb to 5000FT via DGC R158 to DGC 12.0DME, turn right, via DGC 13.9DME clockwise ARC to LAGER and hold.
Contact FUKUOKA APP.

Timing not authorized for defining the MAPt.

13.9	0	3.4	5.4		DME to/from DGC
19.4	5.5	2.0	0.1	0	NM to THR

Missed APCH climb gradient MNM 5.0%

MINIMA THR elev. 15 AD elev. 30

CAT	MDA(H)	RVR/CMV	CIRCLING MDA(H)	CIRCLING VIS
A	680 (665)	1200	830 (800)	1600
B		1400		
C			1020 (990)	2400
D		1800	1030 (1000)	3200

Circling to WEST side of RWY only.
MINIMA with Missed APCH climb gradient of 2.5% are not established.

CHANGE : PROC renamed. FREQ for FUKUOKA TOWER.