

(GIPLE7.GIPLE) 24137

GIPLE SEVEN DEPARTURE (RNAV)


RNAV 1 - DME/DME/IRU or GPS.
RADAR required for non-GPS equipped aircraft.

TOP ALTITUDE:
(JETS/PROPS)
5000 4000

D-ATIS DEP 135.3
CINCINNATI TOWER
118.3 (RWYS 18C/36C, 9/27)
118.975 360.85 (RWY 18L/36R)
133.325 (RWY 18R/36L)
GND CON
121.7
CLNC DEL
127.175
CPDLC
CINCINNATI DEP CON
126.65 254.25 (001°-180°)
128.7 254.25 (181°-360°)

TAKEOFF MINIMUMS:

Rwys 9, 18L/C/R, 27, 36L/C/R: Standard.

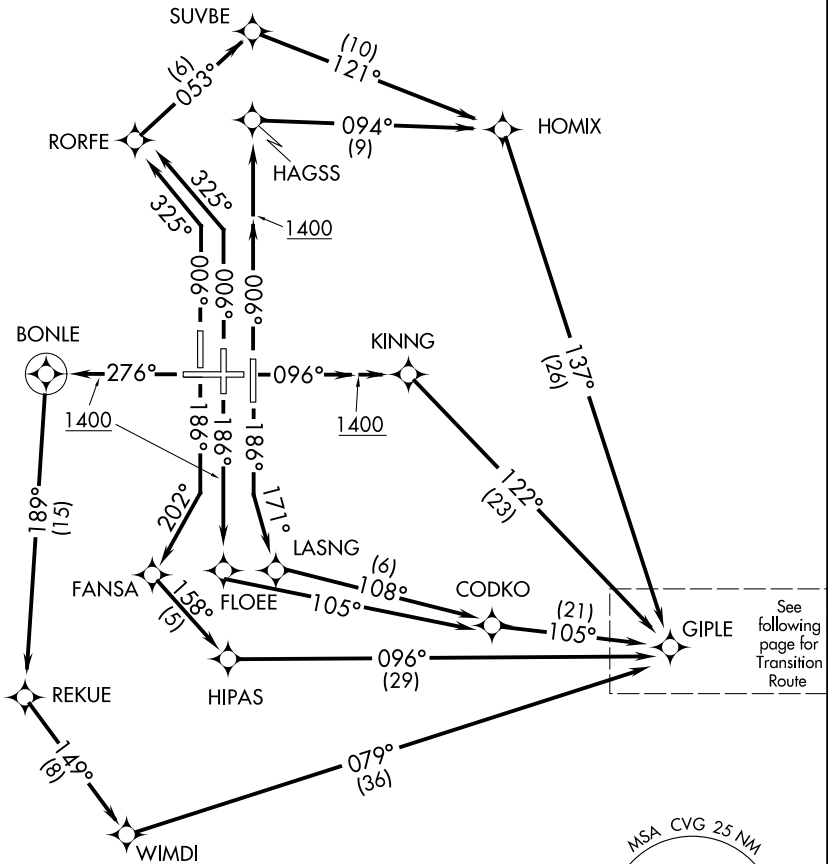

NOTE: Transponder code will be issued via PDC or Cincinnati CLNC DEL.
NOTE: Increase speed to 250K until reaching/leaving 10000'. If unable, advise ATC.

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)

GIPLE SEVEN DEPARTURE (RNAV) Departure Routes