


STANDARD ARRIVAL CHART - INSTRUMENT (STAR) - ICAO

TRANSITION ALTITUDE 13000 FT
SPEED RESTRICTION MAX 250 KIAS BELOW 10000 FT AMSL

APP 124.0 123.8
ATIS 128.2 ARR 128.7 DEP 118.2(W) 118.3(W)
TWR 118.5(E) 124.3(E)
UHF 345.6

JEDDAH/King Abdulaziz Intl (OEJN)
RNAV RWY 16C
VEMEM 2T MISAM 2T MUVOL 2T NOMDA 2T

RNAV 1 GNSS REQUIRED




COM FAILURE
SET TRANSPONDER CODE 7600
FOLLOW COM FAILURE PROCEDURE ON OEJN 2.22.8

ELEV, ALT IN FEET
DIST IN NM
BRG ARE MAG
VAR 4° E (2025)

NOTE:
From RIGOG (IAF) to EMOXO (IF) subject to ATC clearance.

- 1 & 2 MISAM 2T ALT AT 11000 FT, AT 230 KIAS
VEMEM 2T ALT AT OR ABOVE 13000 FT, AT 250 KIAS
- 3 MISAM 2T, VEMEM 2T, AND MUVOL 2T AT 3000 FT
NOMDA 2T AT 6000 FT
- 4 MISAM 2T, VEMEM 2T, AND MUVOL 2T AT 3000 FT
NOMDA 2T AT OR ABOVE 3000 FT

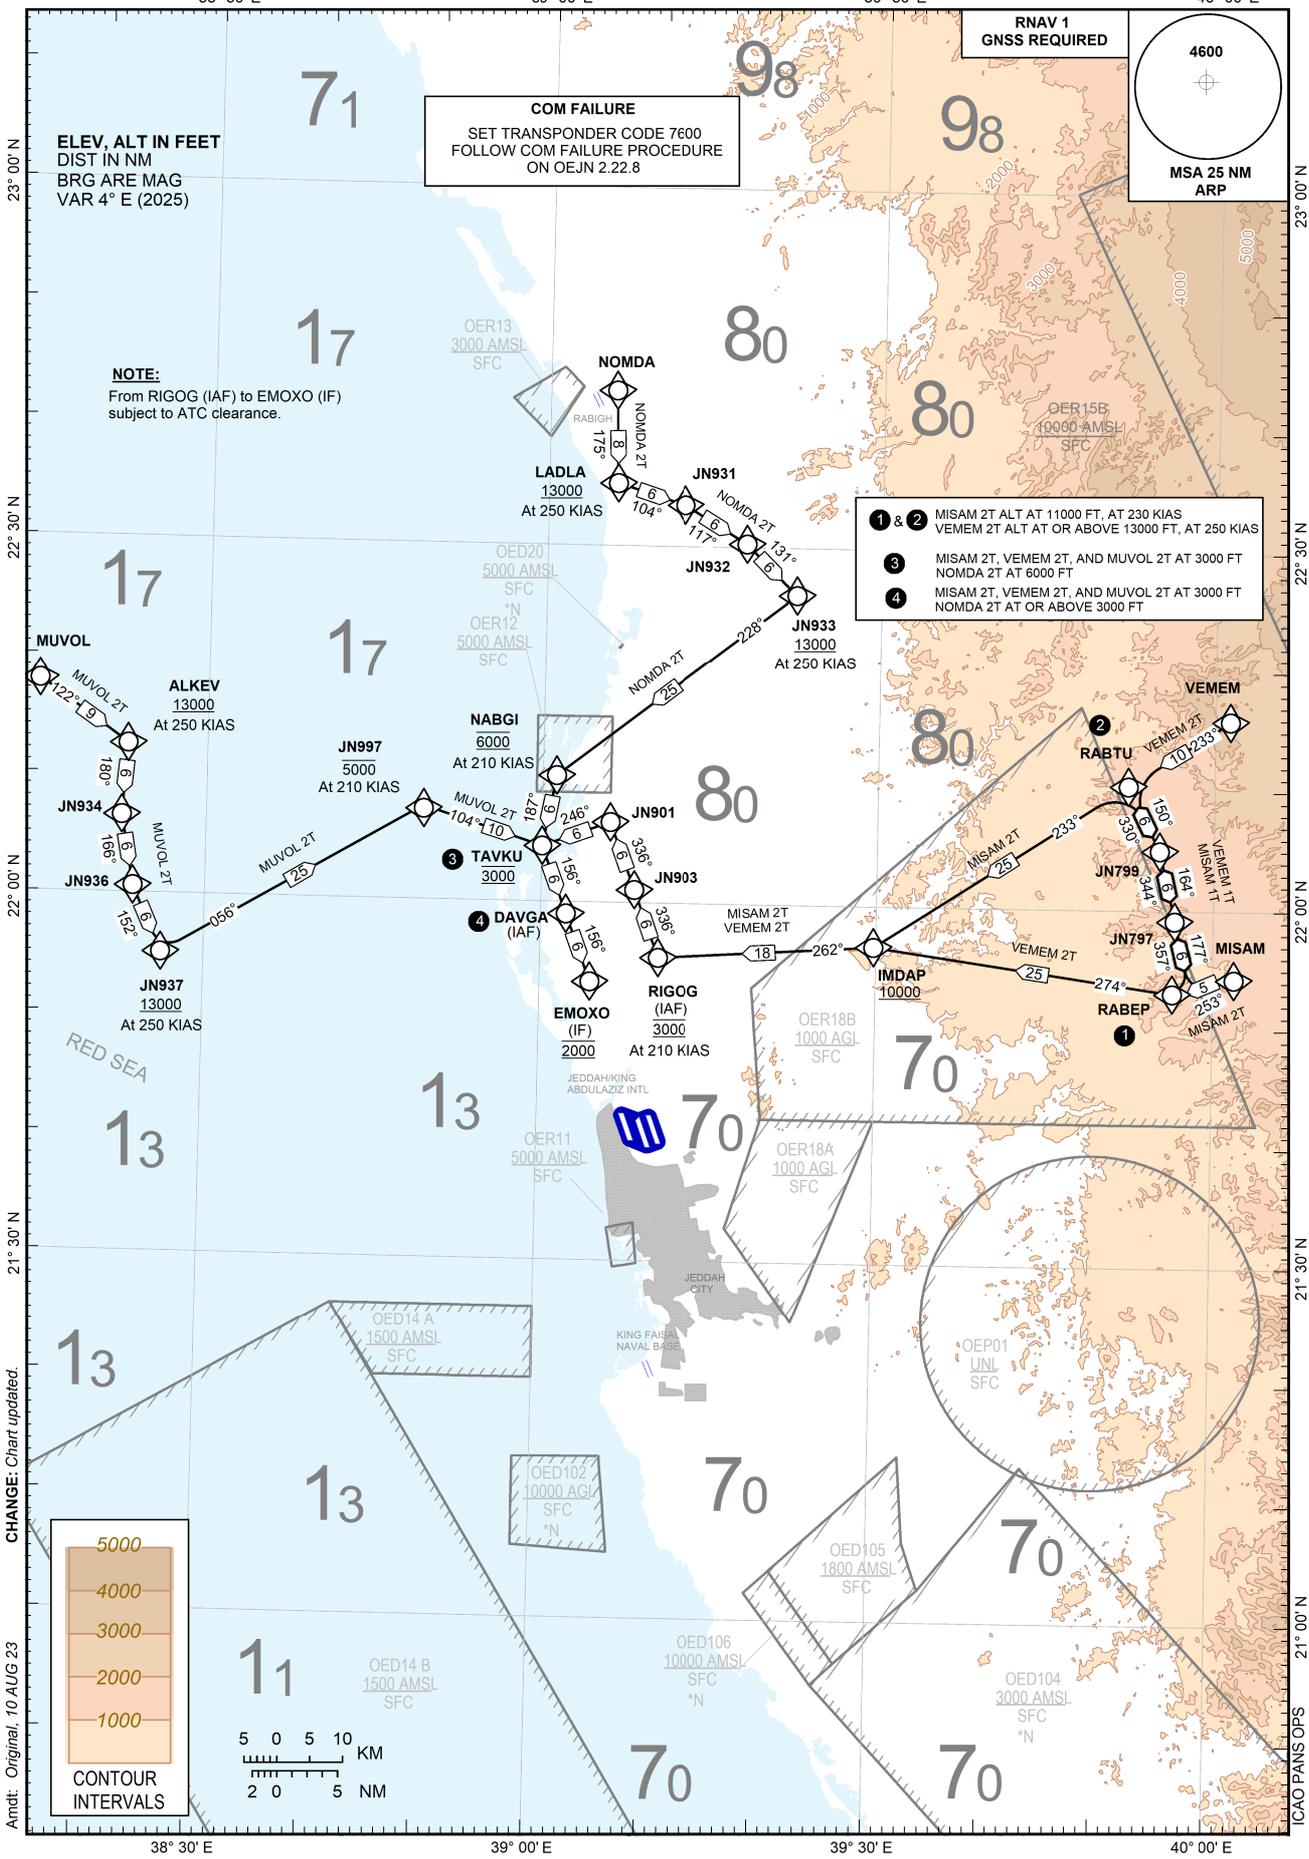

CHANGE: Chart updated.
Amdt: Original, 10 AUG 23

