

GUND (Geoid Undulation) =
The height of the Geoid (MSL) above the
Reference Ellipsoid (WGS 84) at the stated position.



BEARINGS ARE MAGNETIC
ELEVATIONS AND HEIGHTS ARE IN FEET

ELEVATIONS IN FEET AMSL	159
HEIGHTS IN FEET ABOVE AD	(104)

VAR 0.0°E - 2022

N

Annual Rate
of Change 0.21°E

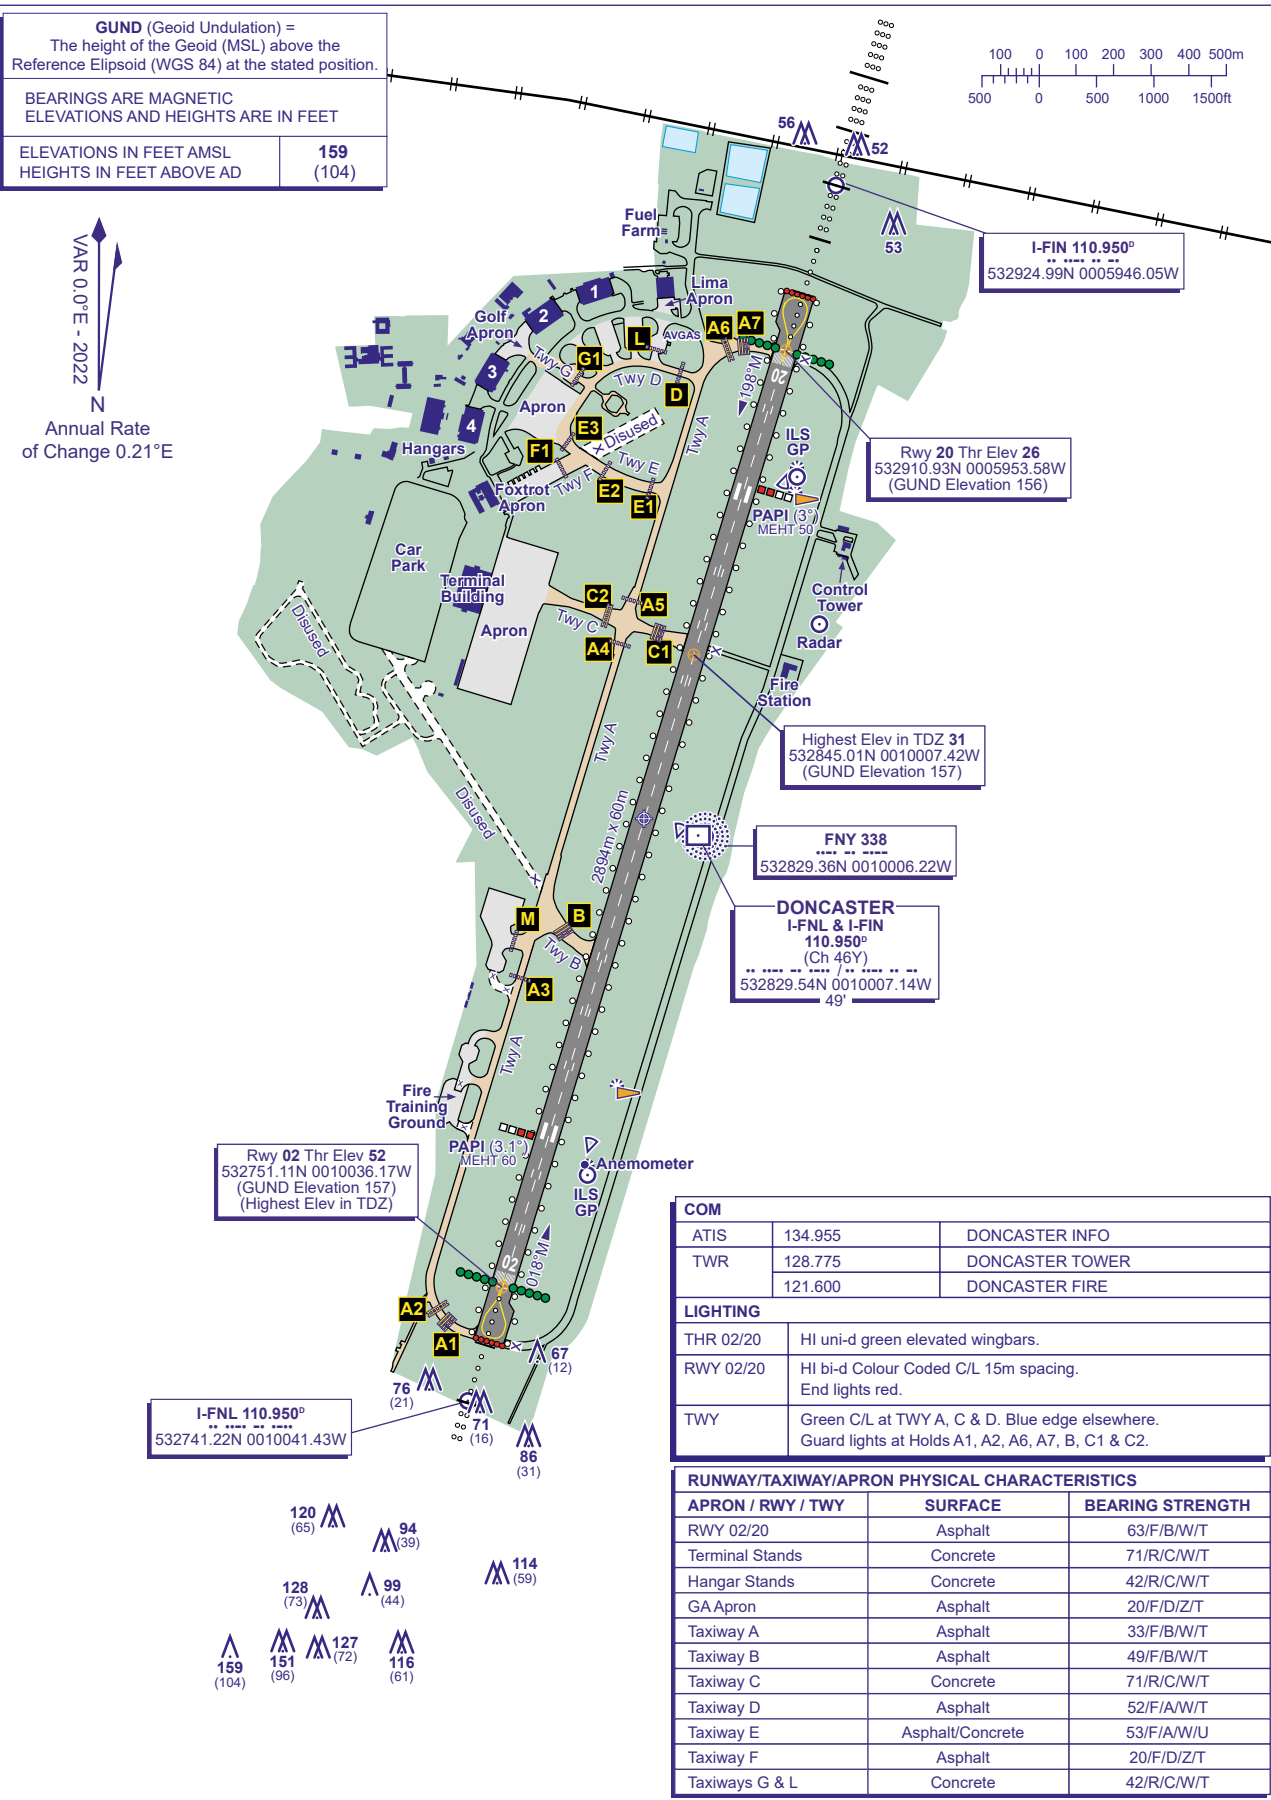

COM		
ATIS	134.955	DONCASTER INFO
TWR	128.775	DONCASTER TOWER
	121.600	DONCASTER FIRE

LIGHTING	
THR 02/20	HI uni-d green elevated wingbars.
RWY 02/20	HI bi-d Colour Coded C/L 15m spacing. End lights red.
TWY	Green C/L at TWY A, C & D. Blue edge elsewhere. Guard lights at Holds A1, A2, A6, A7, B, C1 & C2.

RUNWAY/TAXIWAY/APRON PHYSICAL CHARACTERISTICS		
APRON / RWY / TWY	SURFACE	BEARING STRENGTH
RWY 02/20	Asphalt	63/F/B/W/T
Terminal Stands	Concrete	71/R/C/W/T
Hangar Stands	Concrete	42/R/C/W/T
GA Apron	Asphalt	20/F/D/Z/T
Taxiway A	Asphalt	33/F/B/W/T
Taxiway B	Asphalt	49/F/B/W/T
Taxiway C	Concrete	71/R/C/W/T
Taxiway D	Asphalt	52/F/A/W/T
Taxiway E	Asphalt/Concrete	53/F/A/W/U
Taxiway F	Asphalt	20/F/D/Z/T
Taxiways G & L	Concrete	42/R/C/W/T

CHANGE (13/22): RWY 20 THR COORDINATES. OBSTACLES REVISED.