


STANDARD ARRIVAL CHART  
INSTRUMENT (STAR) - ICAO

TRANSITION ALT  
5000

RNAV (GNSS) STAR RWY 30  
PORI AERODROME  
PORI, FINLAND

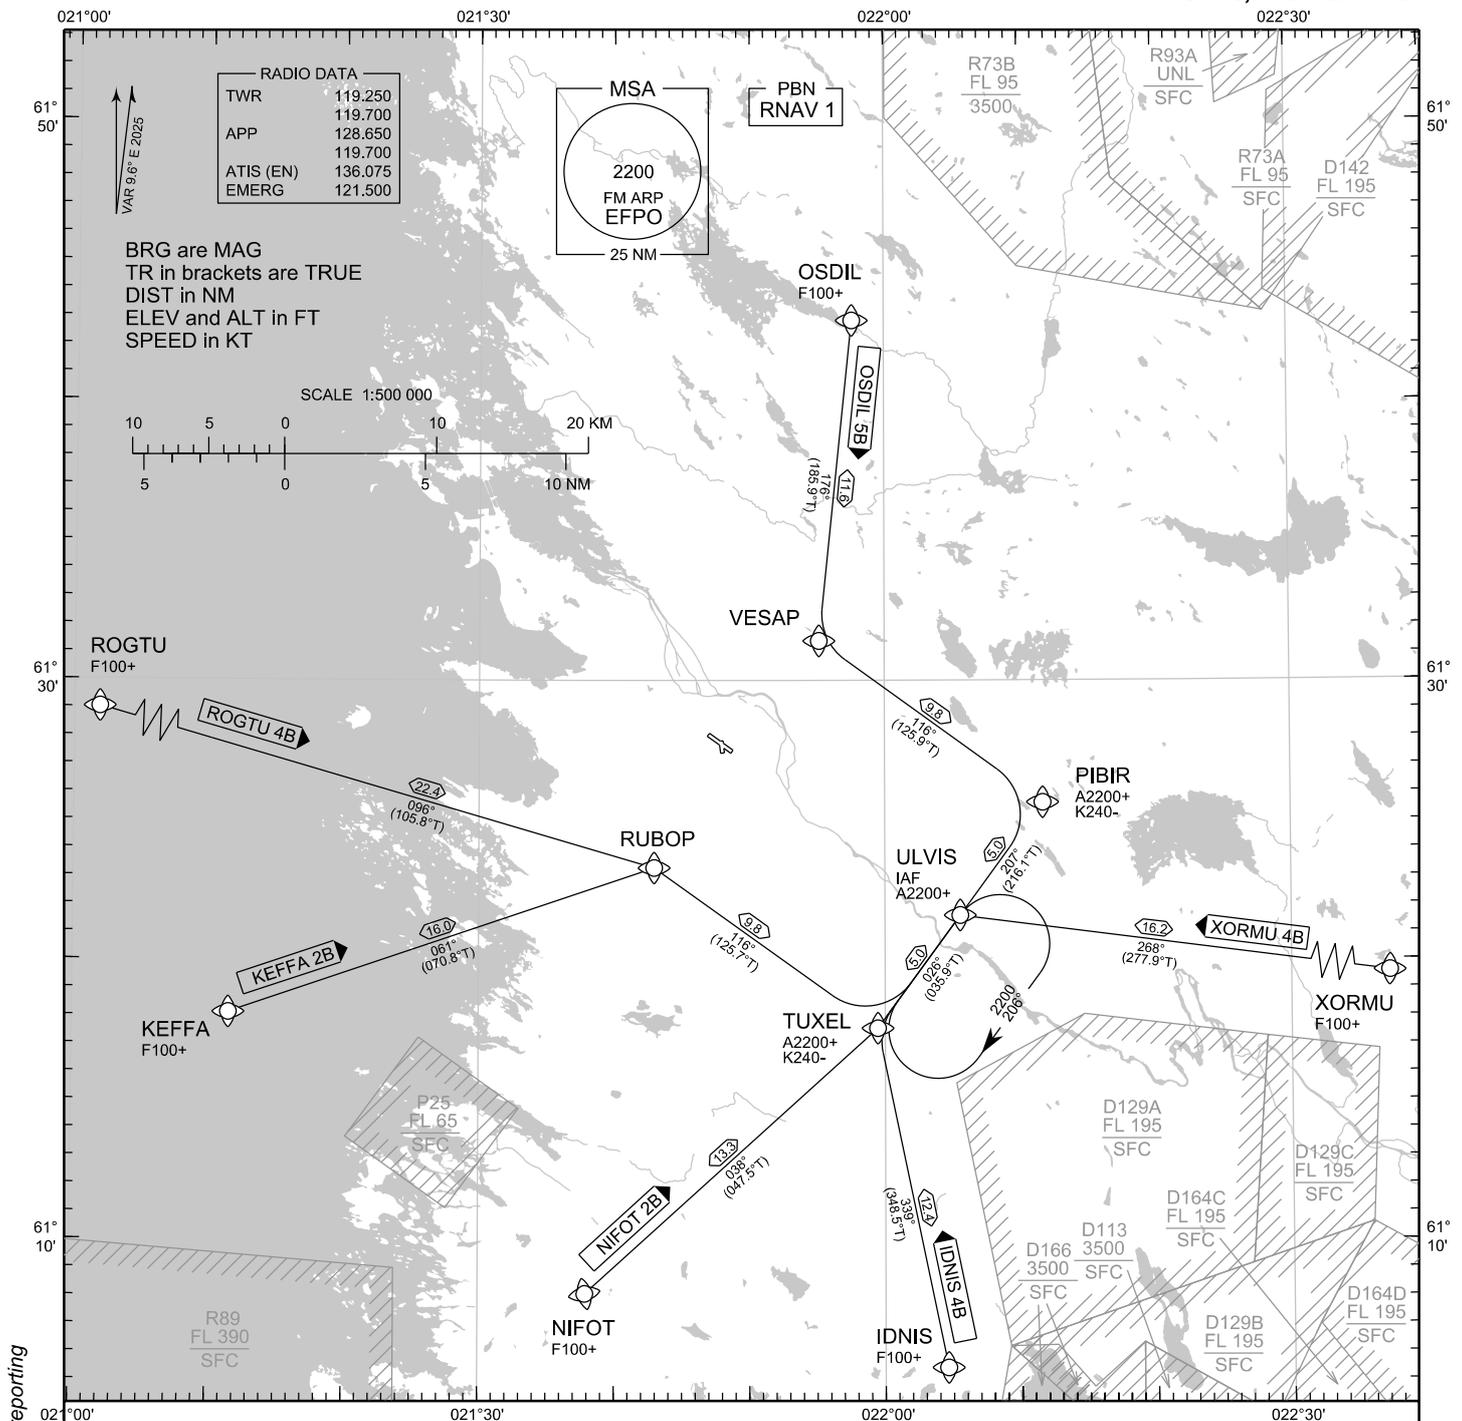

CHG: MAG VAR, ULVIS ATC reporting

RNAV STAR RWY 30

IDNIS 4B KEFFA 2B NIFOT 2B OSDIL 5B ROGTU 4B XORMU 4B

- DME/DME OPS: NOT SUPPORTED AREA MNM ALT: SEE AMA INDEX, AIP ENR 6.1 - 3
- ROUTES: RNAV PROC CODING ON THE VERSO OF THE CHART  
ATC WILL GIVE DESCENT CLEARANCES
- WPT CONSTRAINTS: ALT / FL / SPEED CONSTRAINTS MUST ALWAYS BE FOLLOWED AS PUBLISHED UNLESS EXPLICITLY CANCELLED BY ATC
- CD OPS: BY ATC CLR IF TFC PERMITS. PLAN CD PATH ACCORDING TO STAR
- NOISE ABATEMENT: AVOID OVERFLYING THE CITY OF PORI BELOW 2000
- RCF: SELECT TRANSPONDER CODE 7600
- RNAV STAR HAS BEEN GIVEN AND ACKNOWLEDGED: FOLLOW THE STAR TO THE RESPECTIVE RWY AND EXECUTE IAP AND LAND
- DURING RADAR VECTORED BEFORE IAF: IN ACCORDANCE WITH THE RULES OF THE AIR

EFPO RNAV STAR RWY 30										
RTE NAV SPEC	SEQ NR	P/T	WPT		MAG	GEO TR	DIST NM	Constraints		
			ID	Flyover				LVL	LVL	Speed
IDNIS 4B RNAV 1	010	IF	IDNIS	-	-	-	-	F100+		
	020	TF	TUXEL	-	339°	348.5°T	12.4	A2200+		K240-
	030	TF	ULVIS	-	026°	035.9°T	5.0	A2200+		

KEFFA 2B RNAV 1	010	IF	KEFFA	-	-	-	-	F100+		
	020	TF	RUBOP	-	061°	070.8°T	16.0			
	030	TF	TUXEL	-	116°	125.7°T	9.8	A2200+		K240-
	040	TF	ULVIS	-	026°	035.9°T	5.0	A2200+		

NIFOT 2B RNAV 1	010	IF	NIFOT	-	-	-	-	F100+		
	020	TF	TUXEL	-	038°	047.5°T	13.3	A2200+		K240-
	030	TF	ULVIS	-	026°	035.9°T	5.0	A2200+		

OSDIL 5B RNAV 1	010	IF	OSDIL	-	-	-	-	F100+		
	020	TF	VESAP	-	176°	185.9°T	11.6			
	030	TF	PIBIR	-	116°	125.9°T	9.8	A2200+		K240-
	040	TF	ULVIS	-	207°	216.1°T	5.0	A2200+		

ROGTU 4B RNAV 1	010	IF	ROGTU	-	-	-	-	F100+		
	020	TF	RUBOP	-	096°	105.8°T	22.4			
	030	TF	TUXEL	-	116°	125.7°T	9.8	A2200+		K240-
	040	TF	ULVIS	-	026°	035.9°T	5.0	A2200+		

XORMU 4B RNAV 1	010	IF	XORMU	-	-	-	-	F100+		
	020	TF	ULVIS	-	268°	277.9°T	16.2	A2200+		

RNAV Holdings									
ID	INBD TR	INBD MAG	Turn Direction	Speed	MNM HLDG LVL	TIME	DIST NM		
ULVIS	035.9°T	026°	Right	K230-	A2200	1 MIN	-		

WPT COORD
SEE PAGE EFPO AD 2.15 - 1