

STANDARD DEPARTURE CHART -INSTRUMENT

RODN / KADENA

ATIS ★ 124.2 280.5  
 CLNC DEL  
 123.3 235.0  
 GND CON  
 118.5 275.8  
 TOWER  
 134.1 315.8  
 NAHA DEP CON  
 119.1 335.8 (NW)  
 126.5 258.3 (SE)


TUCOF THREE DEPARTURE

Rwy	Knots	60	120	180	240	300	360
23L	V/V(fpm)	491	982	1473	1964	2455	2946
23R	V/V(fpm)	499	998	1497	1996	2495	2994

ATC Climb Rate to 2700 at 6.4 DME

•666

KADENA  
 112.0 KAD  
 Chan 57

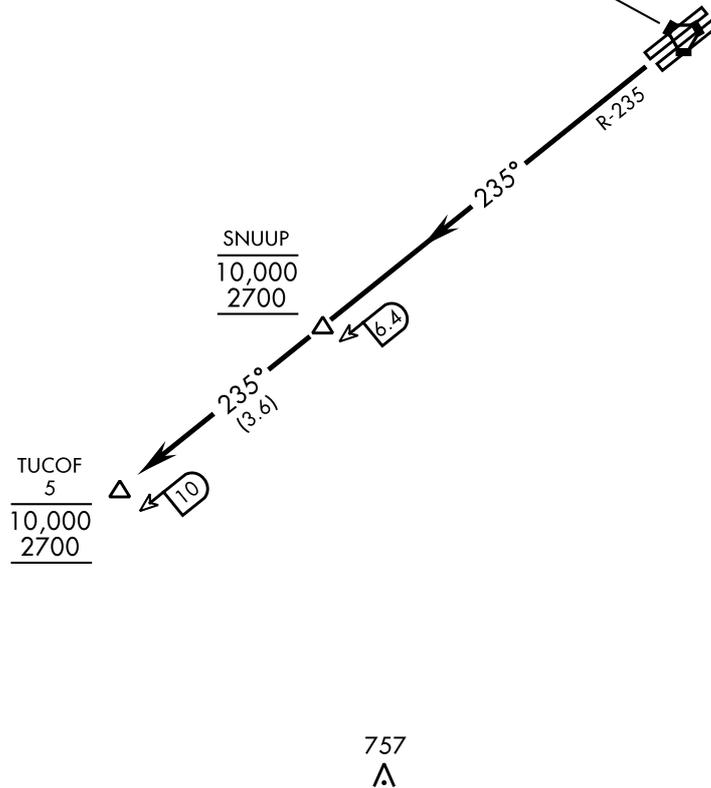

CHANGE : Update.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF Rwy 23L/23R: Climb on KAD R-235 to 10,000, cross SNUUP at or above 2700 and TUCOF at or below 10,000 or altitude specified by ATC.

NOTE: REPRINTING DOD FLIP