

INSTRUMENT APPROACH CHART

RODN / KADENA


APCH CRS 055°	Rwy ldg TDZE Arprt Elev	12,101 106 143
-------------------------	-------------------------------	---

RNAV (GPS) RWY05R


RNP APCH - GPS	MISSED APPROACH: Climb to 6000 direct BYYRD and hold. Continue climb-in-hold to 6000.
RADAR required	
* Circling not authorized NW of RWY 05L-23R.	

ATIS* 124.2 280.5	NAHA APP CON/DEP CON 119.1 335.8 (NW) 126.5 258.3 (SE)	TOWER 134.1 315.8	GND CON 118.5 275.8	CLNC DEL 123.3 235.0	ASR
-----------------------------	--	-----------------------------	-------------------------------	--------------------------------	-----


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 7° C or above 54° C.

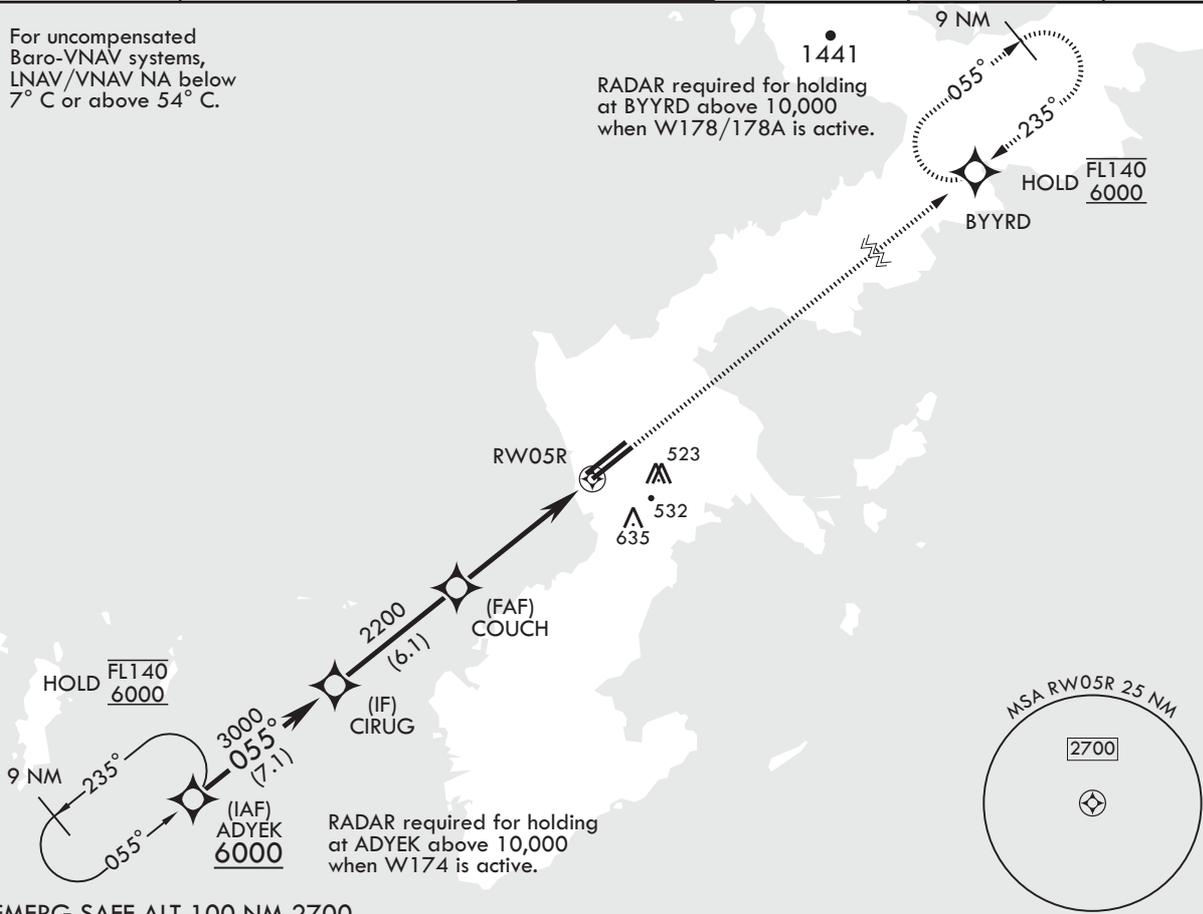

EMERG SAFE ALT 100 NM 2700

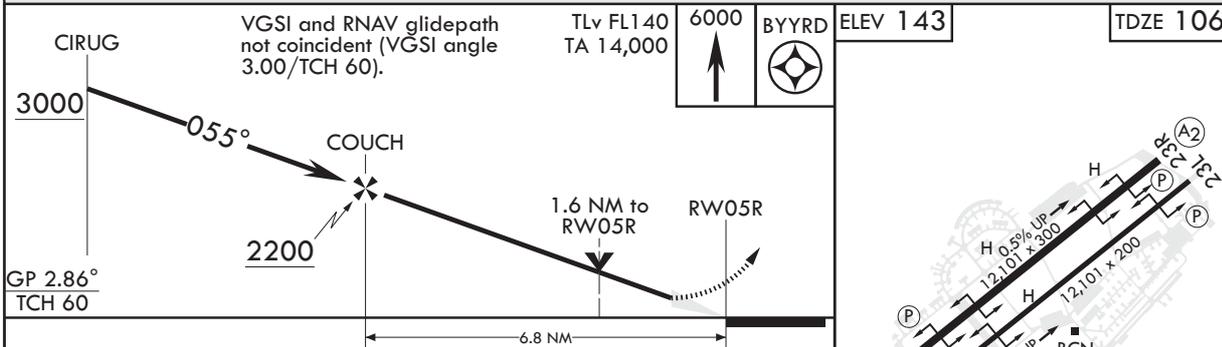

CATEGORY	A	B	C	D	E
LNAV/VNAV DA	479/55 373 (400-1)	490/60 384 (400-1½)	498/60 392 (400-1½)	509/60	403 (400-1½)
LNAV MDA	640/55	534 (500-1)	640-1½	534	(500-1½)
CIRCLING*	780-1 637 (700-1)	920-1 777 (800-1)	940-2¼ 797 (800-2¼)	940-2½ 797 (800-2½)	1000-3 857 (900-3)

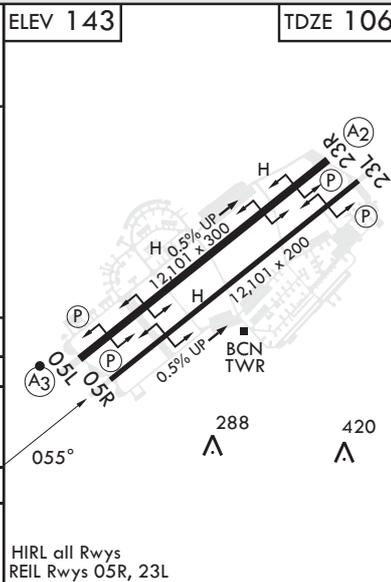

CHANGE : Update.

NOTE: REPRINTING DOD FLIP