


INSTRUMENT APPROACH CHART

RJSS / SENDAI

RNP RWY27(AR)

SENDAI APP 120.4 - 261.2	RNP AR RF required.	SENDAI TOWER 118.7 - 126.2	1200 - 1300(UTC) SENDAI RADIO 118.7 AFIS provided by New Chitose Airport Office	RADAR AVBL ATIS 126.45
-----------------------------	------------------------	-------------------------------	--	---------------------------


For uncompensated Baro-VNAV systems, procedure not authorized below -10°C / above 45°C

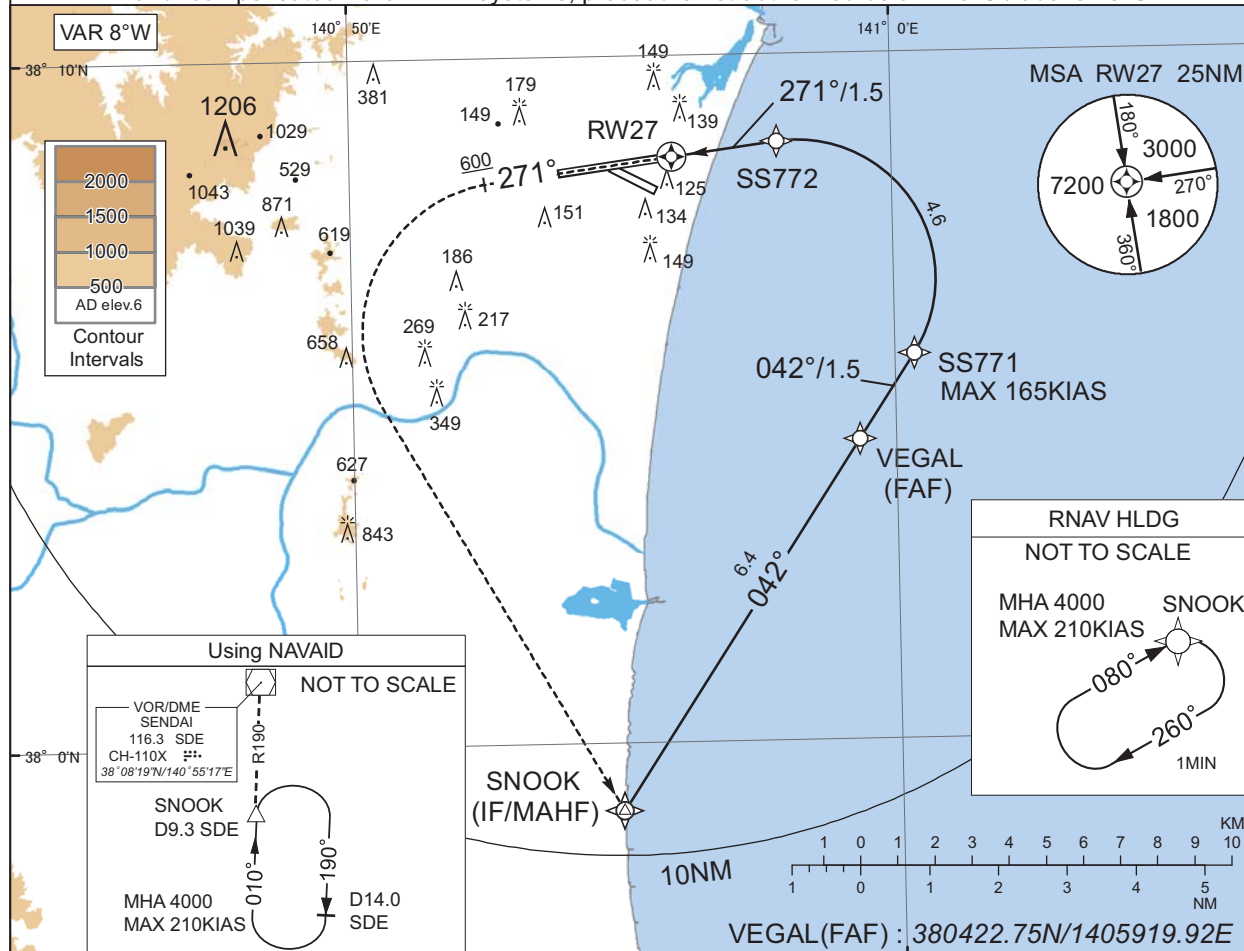

MISSED APPROACH

From RW27 on track 271°,
at or above 600FT turn left,
direct to SNOOK and hold at
4000FT.

Contact SENDAI APP.

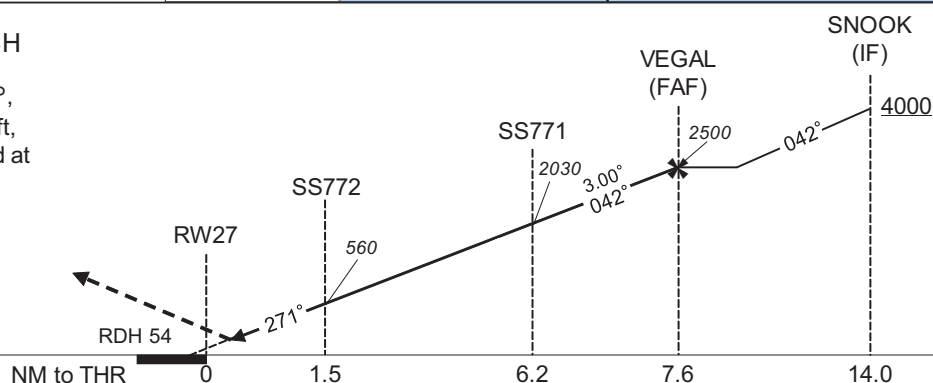

MINIMA	THR elev. 15	AD elev. 6
CAT	RNP 0.30	
	DA(H)	RVR/CMV
A	-	-
B	-	-
C	315(300)	1000
D		1400

Authorization Required

* Missed APCH climb gradient MNM 4.0%

CHANGE : Description of VAR.

INSTRUMENT APPROACH CHART

RJSS / SENDAI

RNP RWY27(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	SNOOK	-	-	-8.3	-	-	+4000	-	-	-
002	TF	VEGAL	-	042 (033.3)	-8.3	6.4	-	2500	-	-	1.0
003	TF	SS771	-	042 (033.4)	-8.3	1.5	-	2030	-165	-3.00	0.3
004	RF Center: SSRF1 r=2.02NM	SS772	-	-	-8.3	4.6	L	560	-	-3.00	0.3
005	TF	RW27	Y	271 (262.6)	-8.3	1.5	-	69	-	-3.00/54	0.3
006	FA	-	-	271 (262.6)	-8.3	-	-	+600	-	-	1.0
007	DF	SNOOK	-	-	-8.3	-	L	4000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	SNOOK	080 (071.9)	-8.3	1.0 (-14000)	R	4000	FL140	-210 (-14000)	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
SNOOK	375901.53N / 1405451.66E	SSRF1	380643.74N / 1405813.69E
VEGAL	380422.75N / 1405919.92E		
SS771	380536.78N / 1410021.86E		
SS772	380844.14N / 1405753.87E		
RW27	380832.18N / 1405557.56E		