



INSTRUMENT APPROACH CHART

ROMY / MIYAKO

RNP Y RWY04(AR)

| | | | |
|--------------------------------|------------------------|-------------------------------|------------|
| SAKISHIMA APP 125.0 - 121.2 | RNP AR RF required. | MIYAKO TOWER 118.2 - 126.2 | RADAR AVBL |
|--------------------------------|------------------------|-------------------------------|------------|

For uncompensated Baro-VNAV systems, procedure not authorized below 0°C / above 45°C

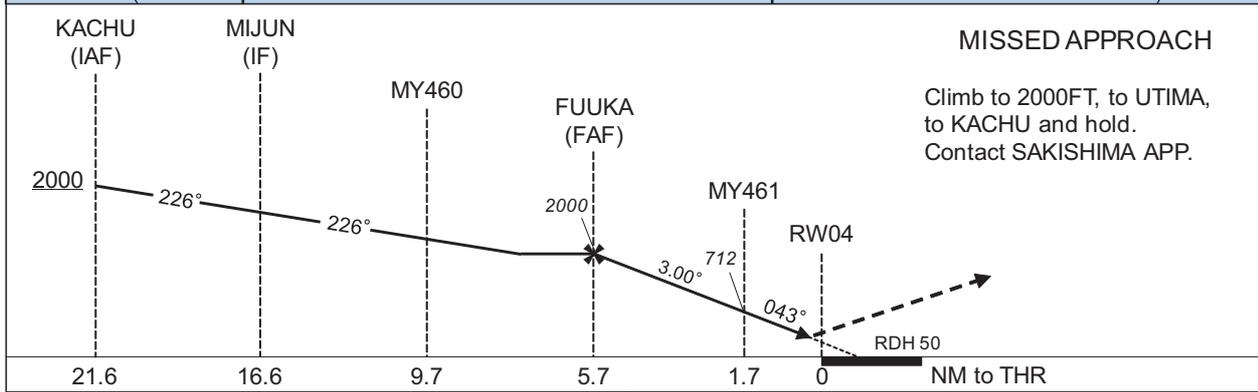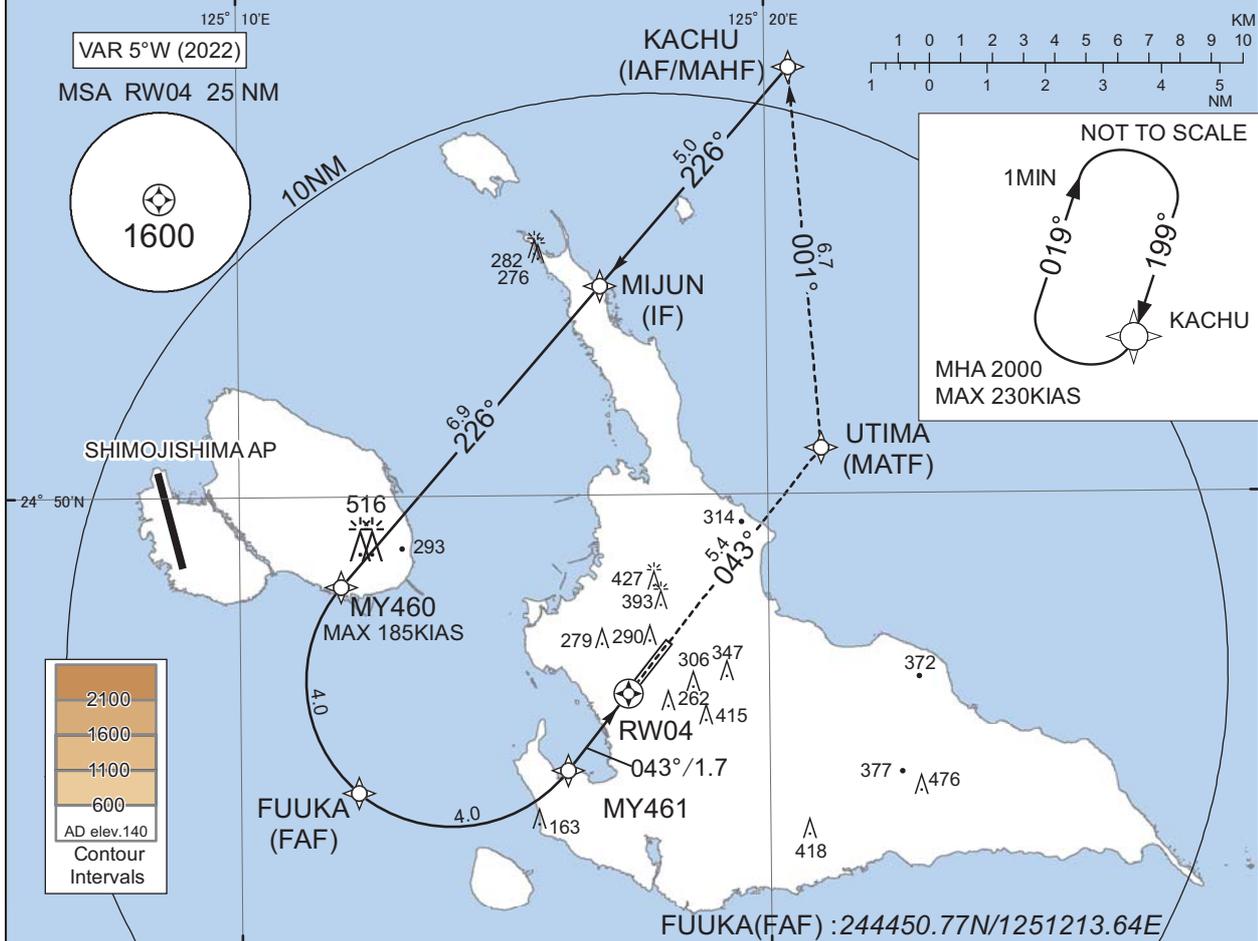

| MINIMA | THR elev. 124 | | AD elev. 140 | |
|--------|---------------|------|--------------|------|
| | RNP 0.29 | | RNP 0.30 | |
| CAT | DA(H) | CMV | DA(H) | CMV |
| A | - | - | - | - |
| B | - | - | - | - |
| C | 424(300) | 1400 | 430(306) | 1400 |
| D | 424(300) | 1600 | 440(316) | 1600 |

Authorization Required

CHANGE : PROC renamed. Requirement for RNP.

INSTRUMENT APPROACH CHART

ROMY / MIYAKO

RNP Y RWY04(AR)

Coding Table

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | VPA/ RDH (°/FT) | RNP Value |
|---------------|------------------------------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|-----------------|--------------|
| 001 | IF | KACHU | - | - | -5.2 | - | - | +2000 | - | - | - |
| 002 | TF | MIJUN | - | 226 (220.8) | -5.2 | 5.0 | - | - | - | - | 1.0 |
| 003 | TF | MY460 | - | 226 (220.7) | -5.2 | 6.9 | - | +2000 | -185 | - | 1.0 |
| 004 | RF Center: MYRF1 r=2.52NM | FUUKA | - | - | -5.2 | 4.0 | L | 2000 | - | - | 1.0 |
| 005 | RF Center: MYRF1 r=2.52NM | MY461 | - | - | -5.2 | 4.0 | L | 712 | - | -3.00 | 0.29 0.30 |
| 006 | TF | RW04 | Y | 043 (038.1) | -5.2 | 1.7 | - | 174 | - | -3.00/50 | 0.29 0.30 |
| 007 | TF | UTIMA | - | 043 (038.2) | -5.2 | 5.4 | - | - | - | - | 1.0 |
| 008 | TF | KACHU | - | 001 (355.6) | -5.2 | 6.7 | - | 2000 | - | - | 1.0 |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS) | RNP Value |
|------|---------------------|-----------------------|--------------------|---------------------|----------------|-----------------------|-----------------------|------------------|-----------|
| Hold | KACHU | 199 (193.5) | -5.2 | 1.0 (-14000) | R | 2000 | FL140 | -230 (-14000) | 1.0 |

Waypoint Coordinates

| Waypoint Identifier | Coordinates | RF Arc Center Identifier | Coordinates |
|---------------------|--------------------------|--------------------------|--------------------------|
| KACHU | 245726.14N / 1252027.95E | MYRF1 | 244646.77N / 1251400.81E |
| MIJUN | 245338.80N / 1251651.84E | | |
| MY460 | 244826.09N / 1251155.10E | | |
| FUUKA | 244450.77N / 1251213.64E | | |
| MY461 | 244512.72N / 1251611.26E | | |
| RW04 | 244632.65N / 1251720.41E | | |
| UTIMA | 245048.13N / 1252101.67E | | |

CHANGE : PROC renamed.