

LOC/DME I-APA 111.3 Chan 50	APP CRS 350°	Rwy Idg 10001 TDZE 5885 Apt Elev 5885	35R 35L 7001 5869 5885
--	------------------------	---	--

ILS or LOC RWY 35R


CENTENNIAL (APA)

DME required for LOC only. RADAR required for procedure entry.


▼ Rwy 35L helicopter visibility reduction below 1 SM NA. For inop ALS, increase S-LOC 35R Cat C/D visibility to 1½ SM. Sidestep and Circling Rwy 35L NA at night.

⚠ MISSED APPROACH: Climb to 7400 then climbing right turn to 9200 on heading 160° and FQF VORTAC R-197 to HOHUM INT/FQF 22.5 DME and hold.

ATIS 120.3	DENVER APP CON 132.75 269.3	CENTENNIAL TOWER 118.9	GND CON 121.8	CLNC DEL 128.6
----------------------	---------------------------------------	----------------------------------	-------------------------	--------------------------

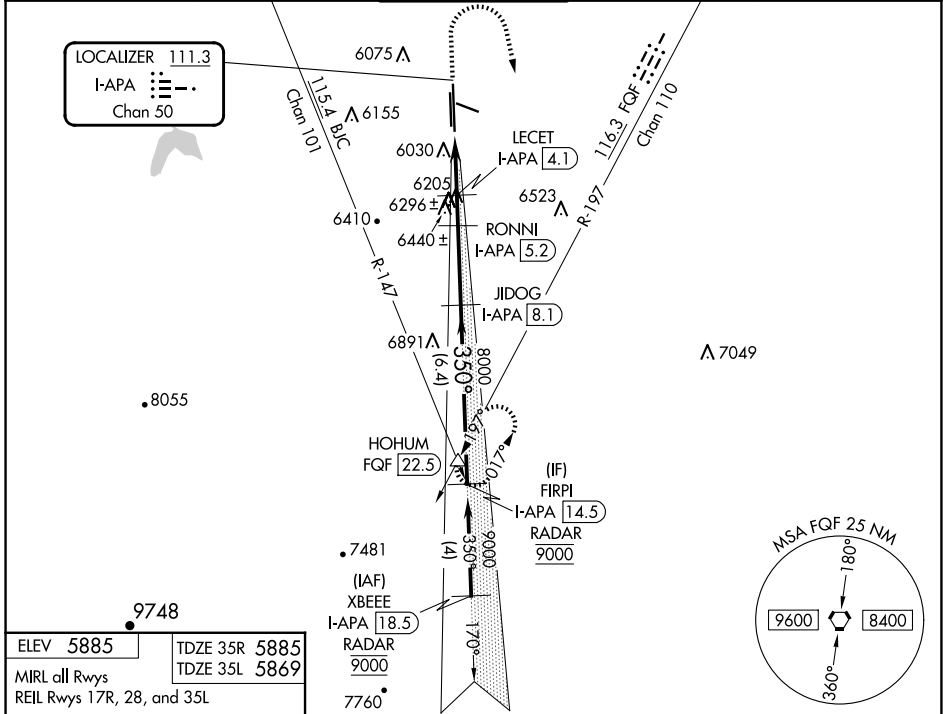

ELEV 5885	TDZE 35R 5885
MIRL all Rwys	TDZE 35L 5869
REIL Rwys 17R, 28, and 35L	

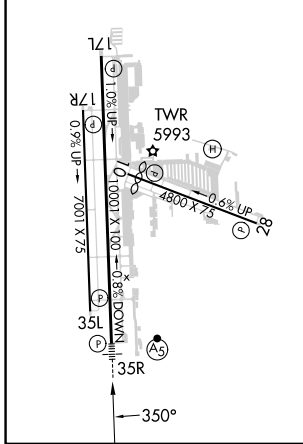

	7400	9200	FQF R-197	HOHUM	JIDOG I-APA 8.1	FIRPI I-APA 14.5
			hdg 160°	△		
				RONNI I-APA 5.2	8000	9000
				LE CET I-APA 4.1		
				I-APA 1.8		
				I-APA 3.5		
				6700	7060	8000
						GS 3.10° TCH 51
CATEGORY	A	B	C	D		
S-ILS 35R	6085-½		200 (200-½)			
S-LOC 35R	6460-½	575 (600-½)	6460-1¼	575 (600-1¼)		
SIDESTEP 35L	6460-1	591 (600-1)	6460-1½	591 (600-2)	6460-2	591 (600-2)
☑ CIRCLING	6460-1	6540-1	6740-2½	6760-2¾	6460-2	591 (600-2)
	575 (600-1)	655 (700-1)	855 (900-2½)	875 (900-2¾)		

SW-1, 20 MAR 2025 to 17 APR 2025

SW-1, 20 MAR 2025 to 17 APR 2025