

STANDARD DEPARTURE CHART - INSTRUMENT


D-ATIS 127.45(DEP)
TWR 130.35(118.05)(E)
VAR2°W 118.45(130.35)(W)

ZGSZ SHENZHEN/Baoan
RWY 34


BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS.
DME DISTANCES IN
NAUTICAL MILES.
DISTANCES IN KM.

Zhuhai APP01 120.35(125.525)
APP02 119.55(119.775)
APP03 123.85(119.775)
APP04 119.025(125.525)
APP05 127.95(119.775)

TL 3600(QNH < 980hPa)
3300(QNH ≥ 980hPa)
TA 2700

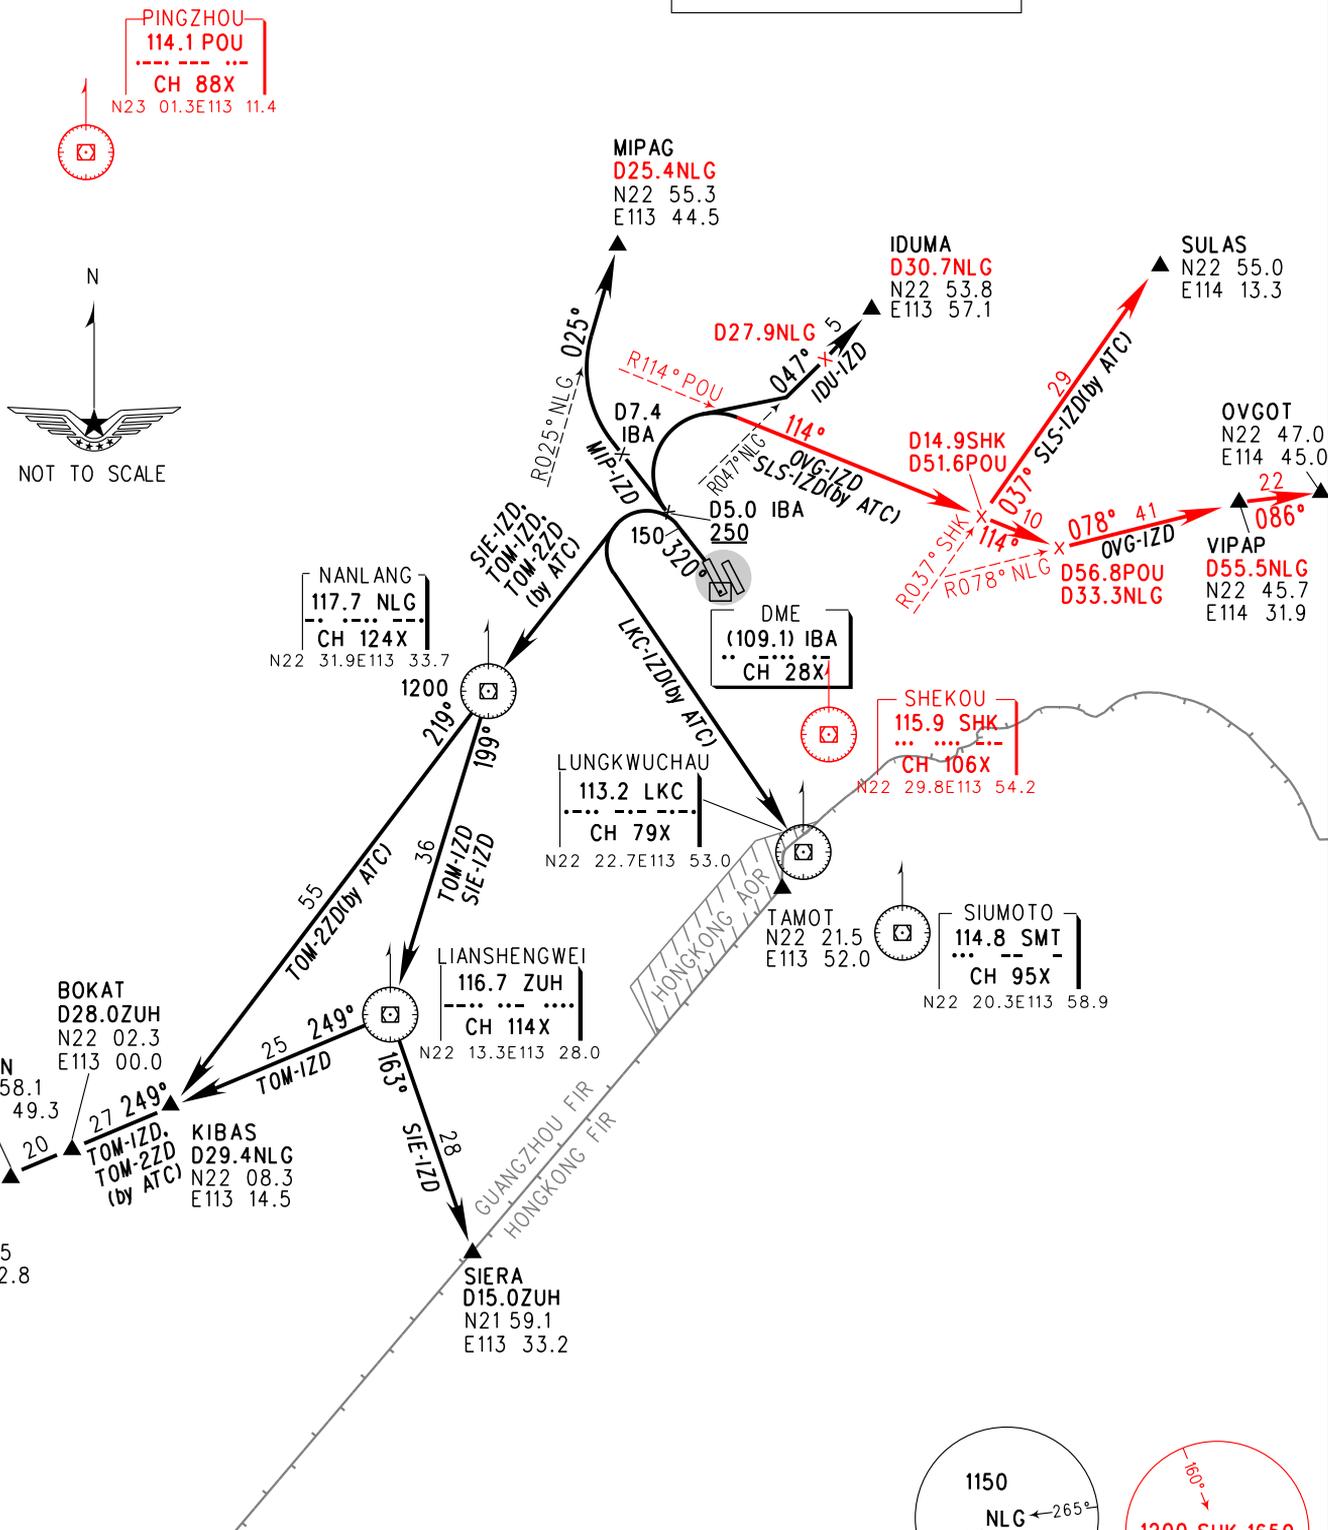

Note: 1. Departure turn MAX IAS425km/h.
2. When two RWYs used for independent departure, IDU-IZD, OVG-IZD, SLS-IZD need ATC clearance.
3. Turning is forbidden until DER.

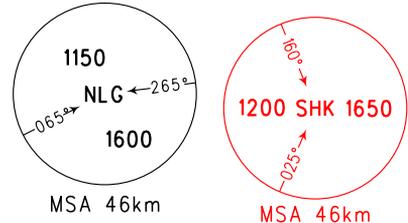

Changes: Procedure, MSA. delete 'GLN' 'SHL'.