

# DANLS THREE DEPARTURE (RNAV)



SE-1, 20 MAR 2025 to 17 APR 2025

D-ATIS 135.1  
 CLNC DEL 126.05  
 CPDLC  
 GND CON  
 121.9 348.6  
 NASHVILLE TOWER  
 118.6 257.8  
 NASHVILLE DEP CON  
 119.35 372.0

**TOP ALTITUDE:**  
4000

**TAKEOFF MINIMUMS:**

Rwys 2C, 2L, 2R, 13, 20L, 31: Standard with minimum climb of 500' per NM to 1100.  
 Rwys 20C, 20R: Standard with minimum climb of 500' per NM to 1300.

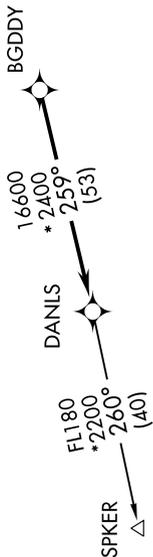

- NOTE: DME/DME/IRU or GPS required.
- NOTE: RNAV 1.
- NOTE: Radar required.
- NOTE: For Turbojet aircraft only.
- NOTE: Transponder code will be issued via PDC or Nashville clearance delivery.
- NOTE: If unable to accept climb rates, advise ATC on initial contact.

**DEPARTURE ROUTE DESCRIPTION**

**TAKEOFF RWYS 2L/C/R:** Climb heading 021° or assigned ATC heading, thence....  
**TAKEOFF RWY 13:** Climb heading 136° or assigned ATC heading, thence....  
**TAKEOFF RWYS 20L/C/R:** Climb heading 201° or assigned ATC heading, thence....  
**TAKEOFF RWY 31:** Climb heading 316° or assigned ATC heading, thence....

....expect radar vectors to BGDDY, then on track 259° to DANLS. Maintain 4000. Expect clearance to filed altitude within five (5) minutes after departure.

**SPKER TRANSITION (DANLS3.SPKER)**

NOTE: Chart not to scale.

SE-1, 20 MAR 2025 to 17 APR 2025