

STANDARD ARRIVAL CHART-INSTRUMENT

VAR5.8° W

D-ATIS(English) 127.85 D-ATIS(Chinese) 128.65

TWR01 118.8(118.325) 17L/35R, 17R/35L
 TWR02 118.4(118.725) 16L/34R, 16R/34L
 TWR03 124.35(118.325) 17L/35R
 TWR04 118.575(118.725) 16R/34L


APP01 120.3(119.75)
 APP02 125.4(124.05)
 APP03 125.85(119.2)
 APP04 123.8(119.2)
 APP05 126.65(128.05)
 APP06 126.3(120.65)

APP07 121.1(119.75)
 APP08 127.75(124.05)
 APP09 121.375(128.05)
 APP10 125.625(120.65)
 APP11 119.075(128.05)

ZSPD SHANGHAI/Pudong
 RWY16L/16R/17L/17R

BEARINGS ARE MAGNETIC.
 ALTITUDES, ELEVATIONS
 AND HEIGHTS IN METERS.
 DME DISTANCES IN
 NAUTICAL MILES.
 DISTANCES IN KM.

TL 3600
 TA 3000
 3300(QNH ≥ 1031hPa)
 2700(QNH ≤ 979hPa)

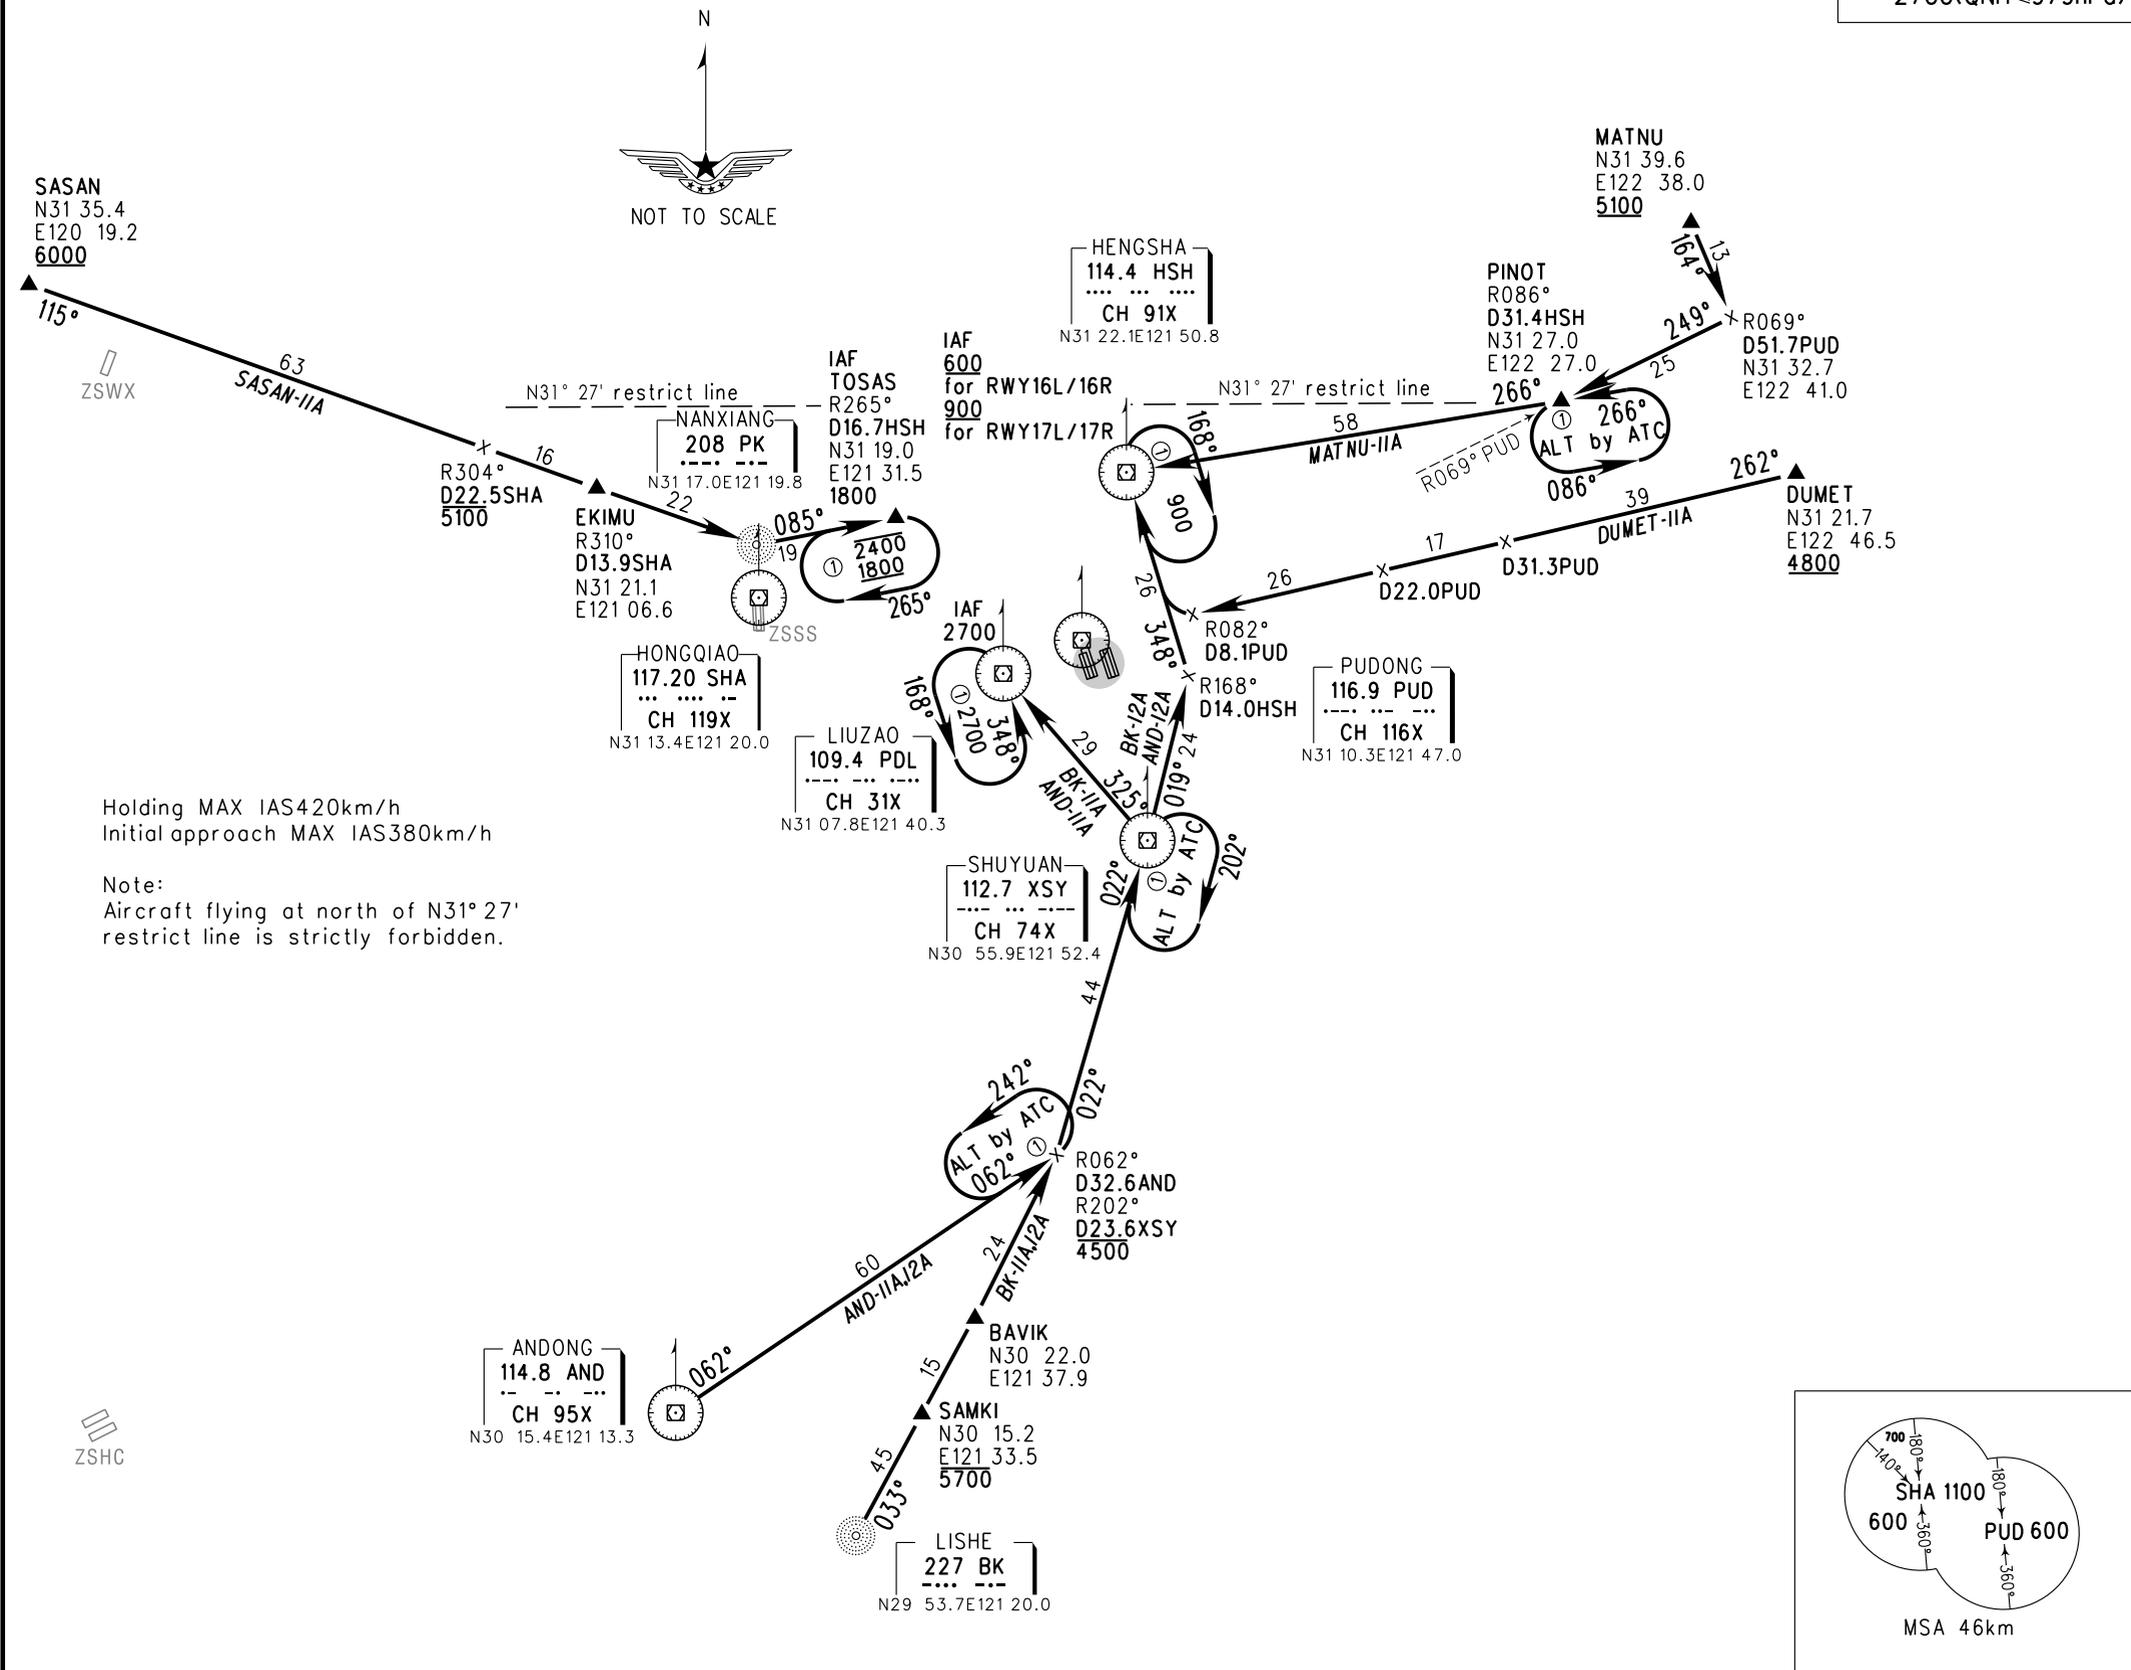

Changes: D-ATIS.