


ATC SURVEILLANCE MINIMUM ALTITUDE CHART

VAR 5.8° W

D-ATIS(English) 127.85
D-ATIS(Chinese) 128.65

ZSPD SHANGHAI/Pudong

AD ELEV 3.8m

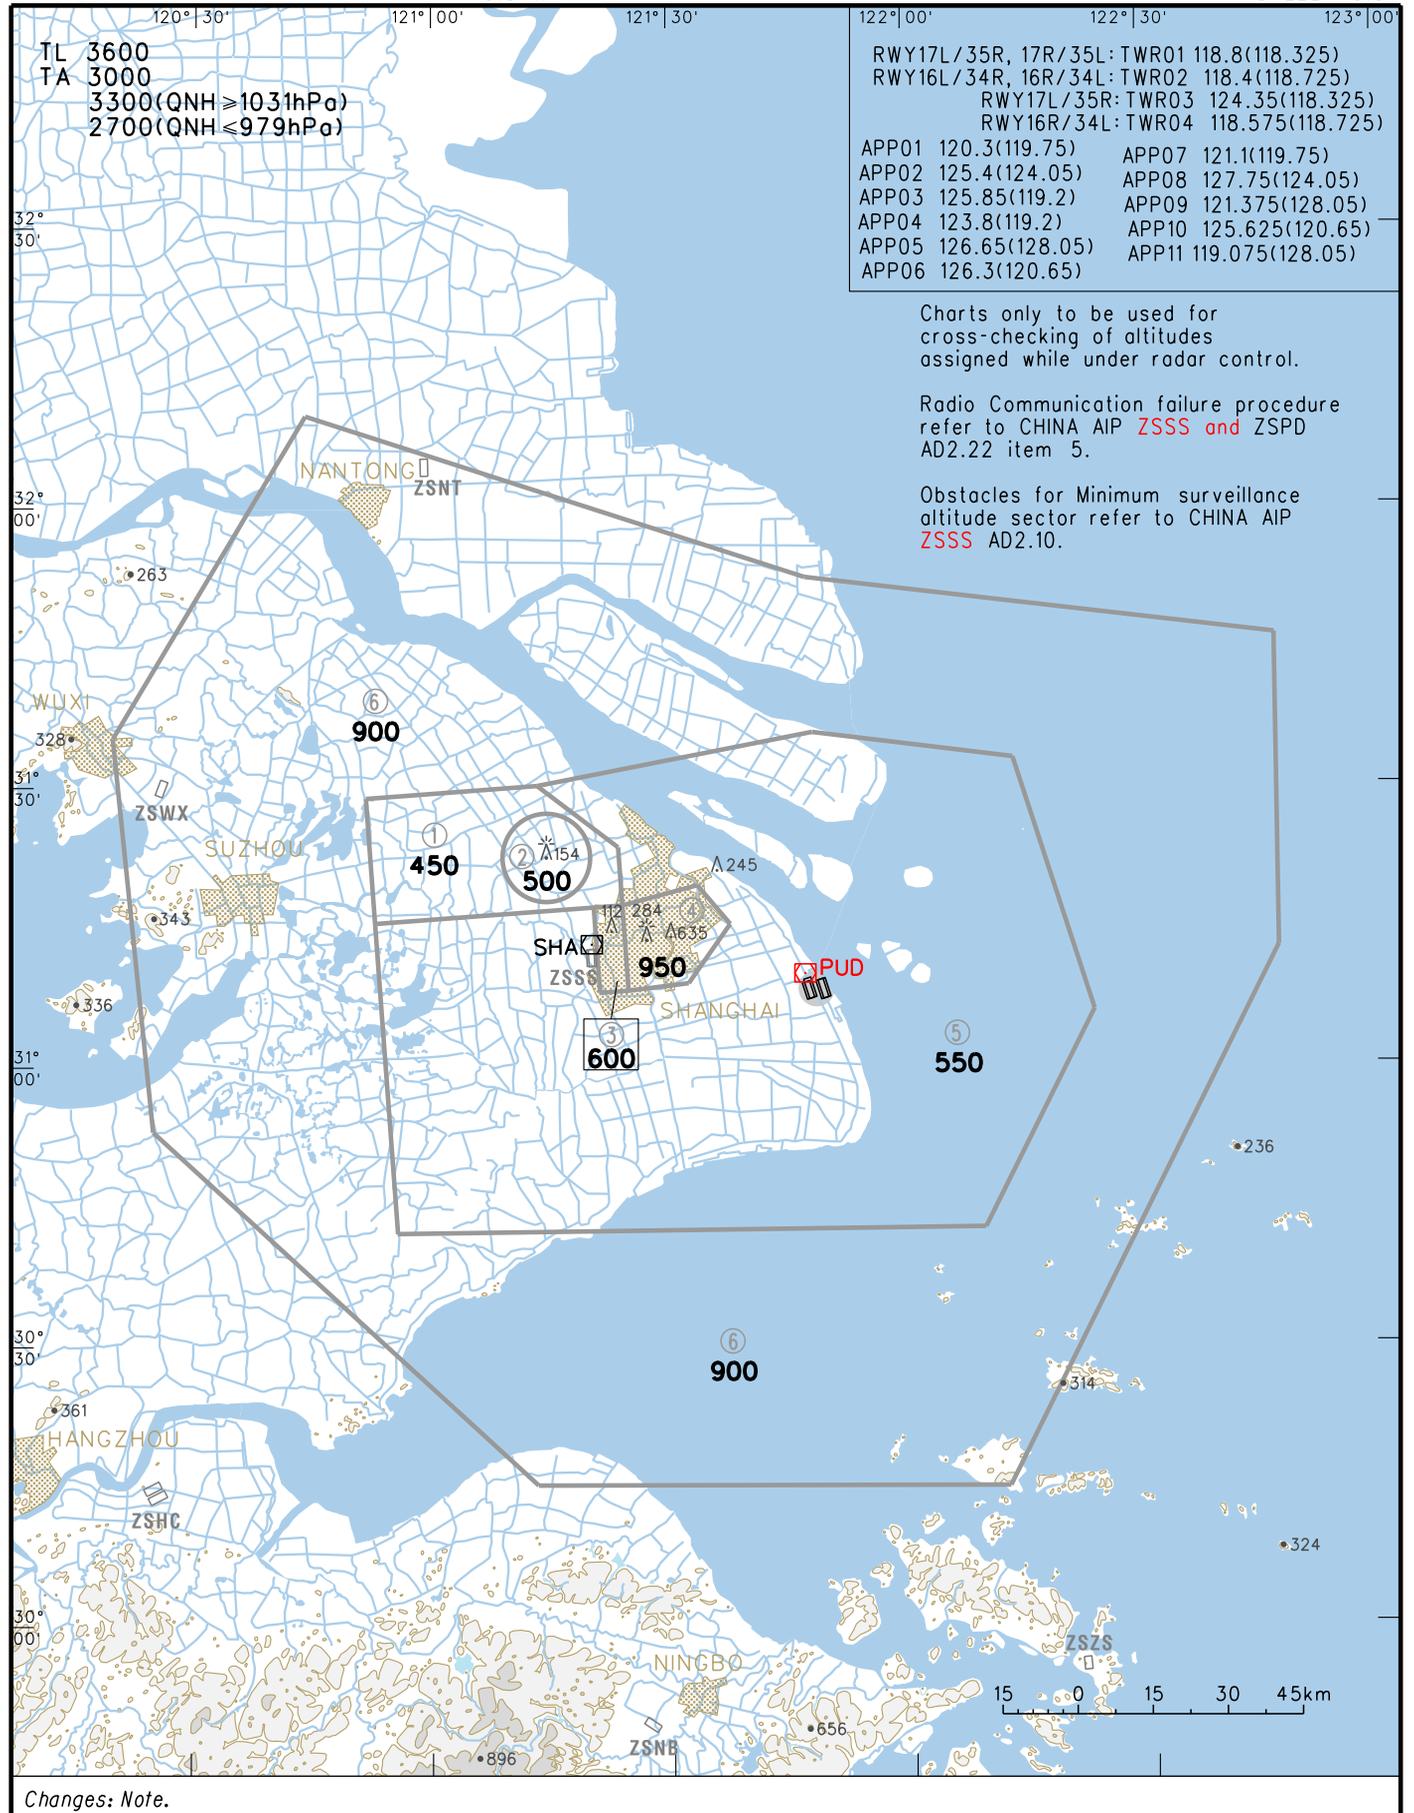

TL 3600
TA 3000
3300(QNH ≥ 1031hPa)
2700(QNH ≤ 979hPa)

RWY17L/35R, 17R/35L: TWR01 118.8(118.325)	
RWY16L/34R, 16R/34L: TWR02 118.4(118.725)	
RWY17L/35R: TWR03 124.35(118.325)	
RWY16R/34L: TWR04 118.575(118.725)	
APP01 120.3(119.75)	APP07 121.1(119.75)
APP02 125.4(124.05)	APP08 127.75(124.05)
APP03 125.85(119.2)	APP09 121.375(128.05)
APP04 123.8(119.2)	APP10 125.625(120.65)
APP05 126.65(128.05)	APP11 119.075(128.05)
APP06 126.3(120.65)	

Charts only to be used for cross-checking of altitudes assigned while under radar control.

Radio Communication failure procedure refer to CHINA AIP **ZSSS and ZSPD** AD2.22 item 5.

Obstacles for Minimum surveillance altitude sector refer to CHINA AIP **ZSSS** AD2.10.

Changes: Note.