


CARTA DE APROXIMACIÓN
POR INSTRUMENTOS-OACI

ELEV AD
469
VAR 1°E (2020)

APP 120.905 C
TWR 118.505 C
GMC 121.705 C
ATIS 128.755 C


GIRONA
VOR
RWY 19

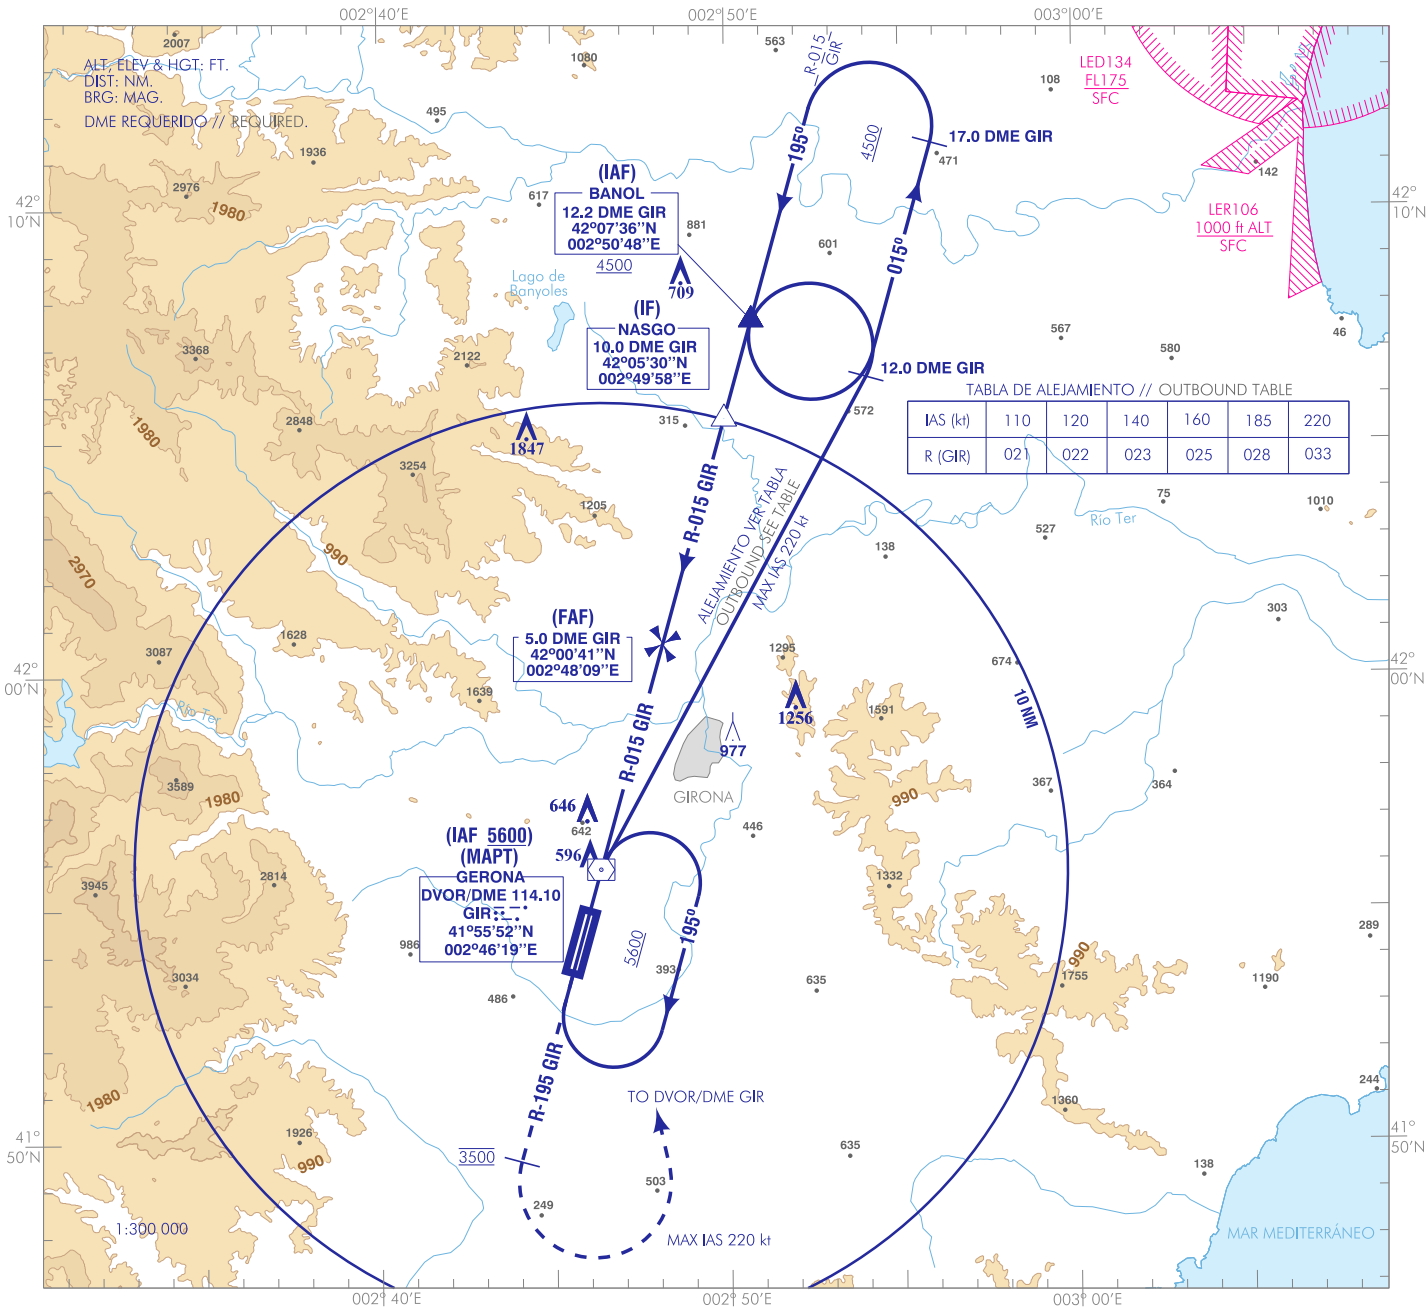

FRUSTRADA: SUBIR EN R-195 GIR HASTA ALCANZAR 3500 AMSL. VIRAR A LA IZQUIERDA (IAS MAX 220 kt) DIRECTO AL DVOR/DME GIR ASCENDIENDO A 5600 PARA INTEGRARSE A LA ESPERA.
MISSED APCH: CLIMB ON R-195 GIR UP TO REACH 3500 AMSL. TURN LEFT (MAX IAS 220 kt) DIRECT TO DVOR/DME GIR CLIMBING UP TO 5600 TO JOIN THE HOLDING.

NOTAS:
- PROHIBIDO VIRAR ANTES DEL MAPT.


NOTES:
- TURNS BEFORE MAPT ARE NOT PERMITTED.

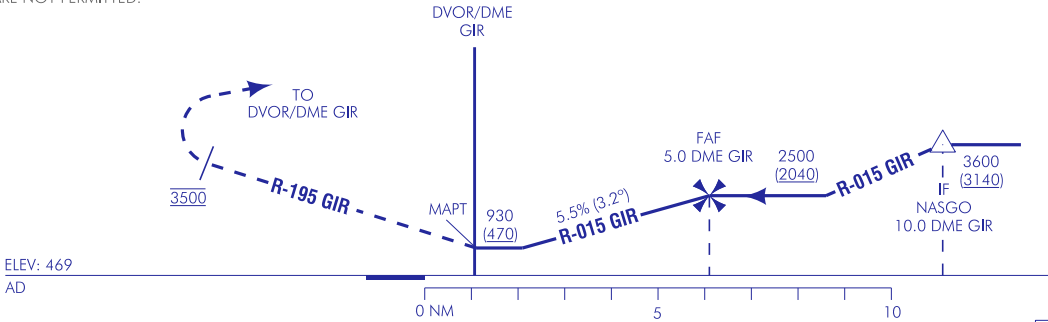

HGT REF ELEV AD					
OCA/H		A	B	C	D
STA	2.5%	930 (470)			
En circuito (H) sobre Circling (H) over		1090 (630)	1390 (930)	1590 (1130)	2130 (1670)

GS	kt	80	100	120	140	160	180
FAF-THR:	min:s						
FAF-MAPT:	min:s	NO AUTORIZADO EL CRONOMETRAJE // TIMING NOT AUTHORIZED					
ROD: 5.5 %	ft/min	448	560	671	783	895	1007

ALT/HGT DME (GIR) FNA												
13	12	11	10	9	8	7	6	5	4	3	2	1
									2220 (1760)	1880 (1420)	1550 (1090)	1210 (750)



GIRONA AD

REQUISITOS DE LA BASE DE DATOS AERONÁUTICA
AERONAUTICAL DATABASE REQUIREMENTS

PROCEDIMIENTOS DE APROXIMACIÓN POR INSTRUMENTOS // INSTRUMENT APPROACH PROCEDURES

VOR RWY 19

PUNTO POINT	LAT	LONG	AZIMUT VERDADERO TRUE BEARING	DISTANCIA DME DME DISTANCE (NM)
BANOL (IAF)	42°07'36.3"N	002°50'48.3"E	015.92° (GIR)	12.19 DME GIR
DVOR/DME GIR (IAF/MAPT)	41°55'52.5"N	002°46'18.7"E	—	—
NASGO (IF)	42°05'29.8"N	002°49'58.4"E	015.83° (GIR)	9.99 DME GIR
FAF	42°00'40.8"N	002°48'09.5"E	016.00° (GIR)	4.99 DME GIR
Aproximación final de no precisión - Pendiente (Ángulo de descenso) // Non-precision final approach - Slope (Descent angle)				5.53% (3.16°)

