

WAAS CH <b>42832</b> RWY <b>W20A</b>	APP CRS <b>203°</b>	Rwy Idg TDZE Apt Elev	<b>3997</b> <b>339</b> <b>342</b>
--	------------------------	-----------------------------	---

# RNAV (GPS) RWY 20



CAPE GIRARDEAU RGNL (CGI)

RNP APCH-GPS.

**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.  
**⚠** When local altimeter setting not received, use Cairo altimeter setting and increase LPV DA to 637 feet and all visibilities 1/8 SM; increase LNAV/VNAV DA to 652 feet; increase all MDAs 60 feet; increase LNAV and Circling visibility Cats C and D 1/4 SM. Rwy 20 helicopter visibility reduction below 3/4 SM NA. Baro-VNAV and VDP NA when using Cairo altimeter setting.


MISSED APPROACH: Climb to 3000 direct ZUGUB and hold.

ASOS <b>120.55</b>	MEMPHIS CENTER <b>133.65 292.15</b>	CAPE GIRARDEAU TOWER * <b>125.525</b> (CTAF) <b>Ⓛ</b>	GND CON <b>124.7</b>	UNICOM <b>122.95</b>
-----------------------	--	--	-------------------------	-------------------------

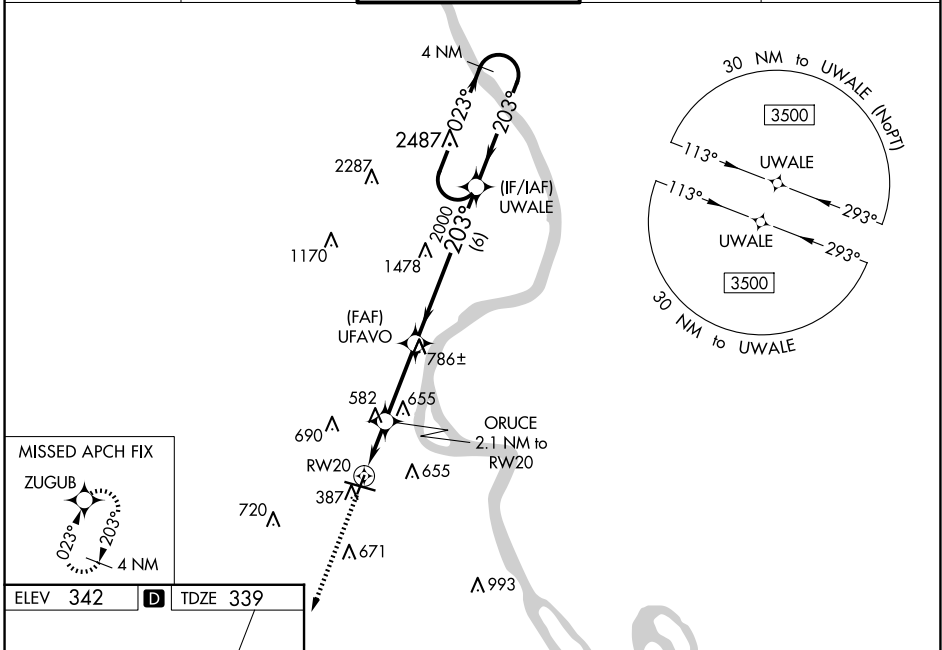

ELEV 342	<b>D</b>	TDZE 339
----------	----------	----------

MIRL Rwy 2-20 **Ⓛ**  
HIRL Rwy 10-28 **Ⓛ**

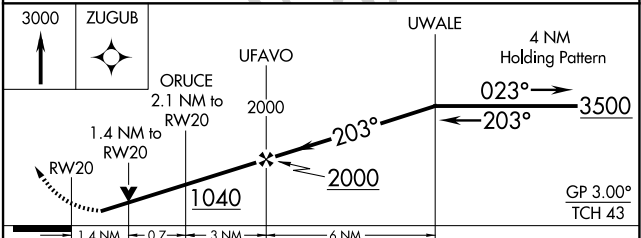

CATEGORY	A	B	C	D
LPV DA		589-1	250 (300-1)	
LNAV/VNAV DA		604-1	265 (300-1)	
LNAV MDA	840-1	501 (500-1)	840-1 3/8	501 (500-1 3/8)
<b>C</b> CIRCLING	860-1 518 (600-1)	960-1 618 (700-1)	1000-1 3/4 658 (700-1 3/4)	1080-2 1/4 738 (800-2 1/4)

NC-3, 20 MAR 2025 to 17 APR 2025

NC-3, 20 MAR 2025 to 17 APR 2025