

INSTRUMENT APPROACH CHART

RJSM /MISAWA





APCH CRS 283°	Rwy Idg 9999
	TDZE 109
	Arprt Elev 119

RNAV(GPS) RWY28

RNP APCH-GPS  
 ▼ \* When ALS inop increase CAT ABC RVR to 45, vis to 7/8 mile; CAT DE RVR to 50, vis to 1 mile.  
 \*\* When ALS inop increase CAT AB RVR to 55, vis to 1 mile; CAT CDE vis to 1 3/8 miles.

ALSF-1  
 MISSED APPROACH: Climb to 2000 then climbing left turn to 7000 direct SHOJU and hold, continue climb-in-hold to 7000.

ATIS* 128.4 315.35	APP CON 120.7 317.8	TOWER 118.1 315.8	GND CON 118.65 275.8	CLNC DEL 118.65 275.8	ASR/PAR
-----------------------	------------------------	----------------------	-------------------------	--------------------------	---------

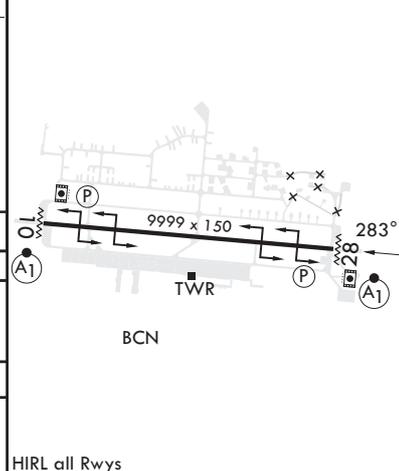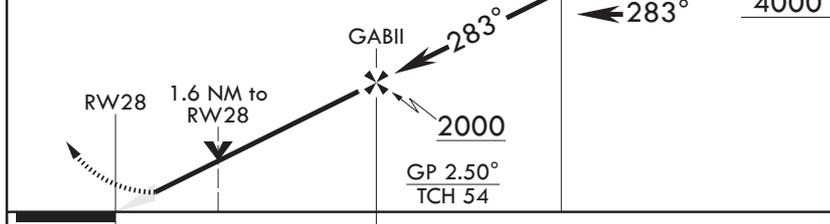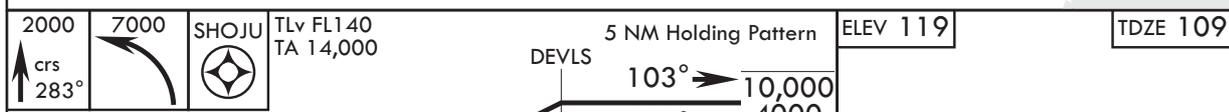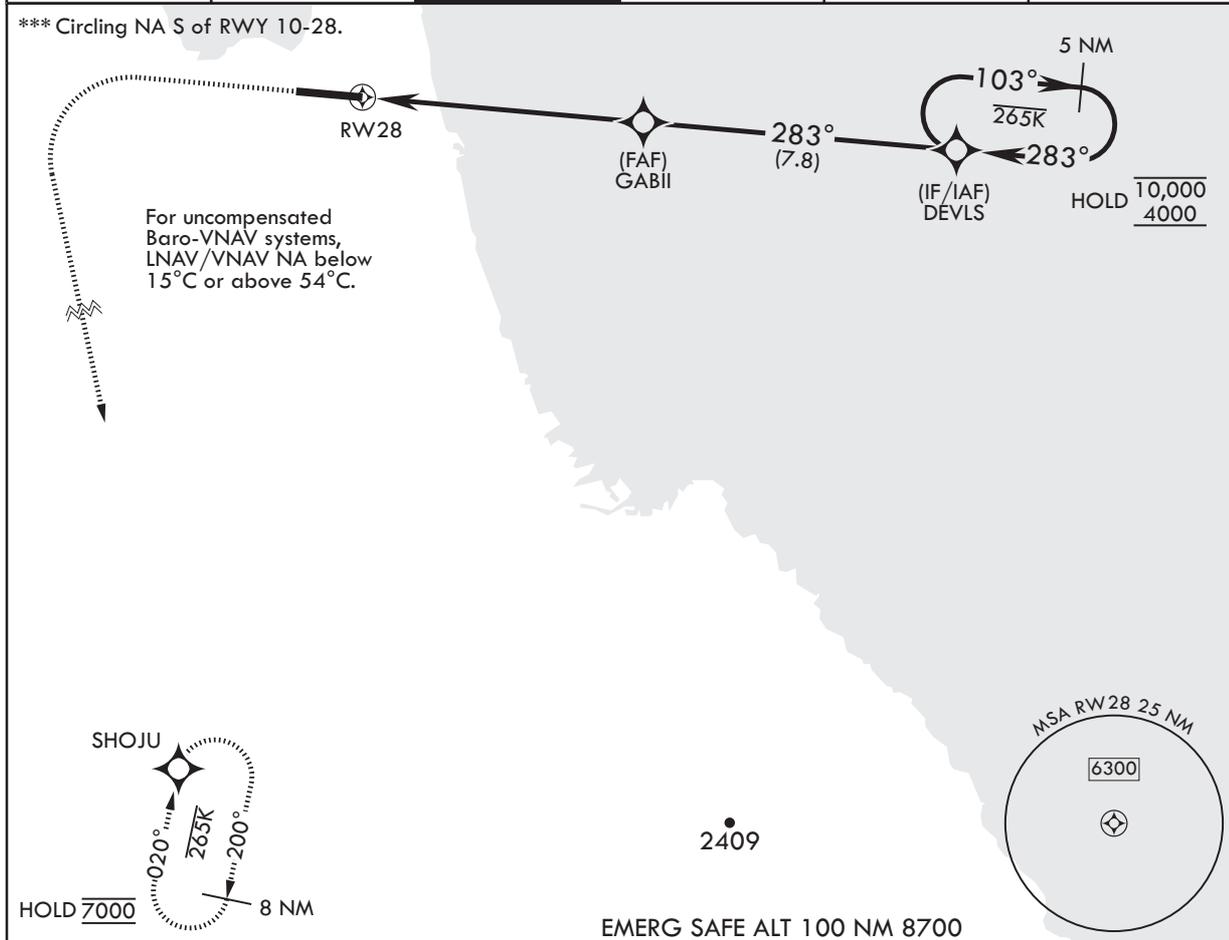

CHANGE : New PROC.

CATEGORY	A	B	C	D	E
LNAV/VNAV DA*	402/24 293 (300-1/2)	413/24 304 (300-1/2)	421/24 312 (400-1/2)	432/26 323 (400-1/2)	
LNAV MDA**	580/24 471 (500-1/2)		580/50	471	(500-1)
<b>C</b> CIRCLING***	580-1 461 (500-1)	600-1 481 (500-1)	600-1 1/2 481 (500-1 1/2)	680-2 561 (600-2)	

HIRL all Rwys

NOTE: REPRINTING DOD FLIP